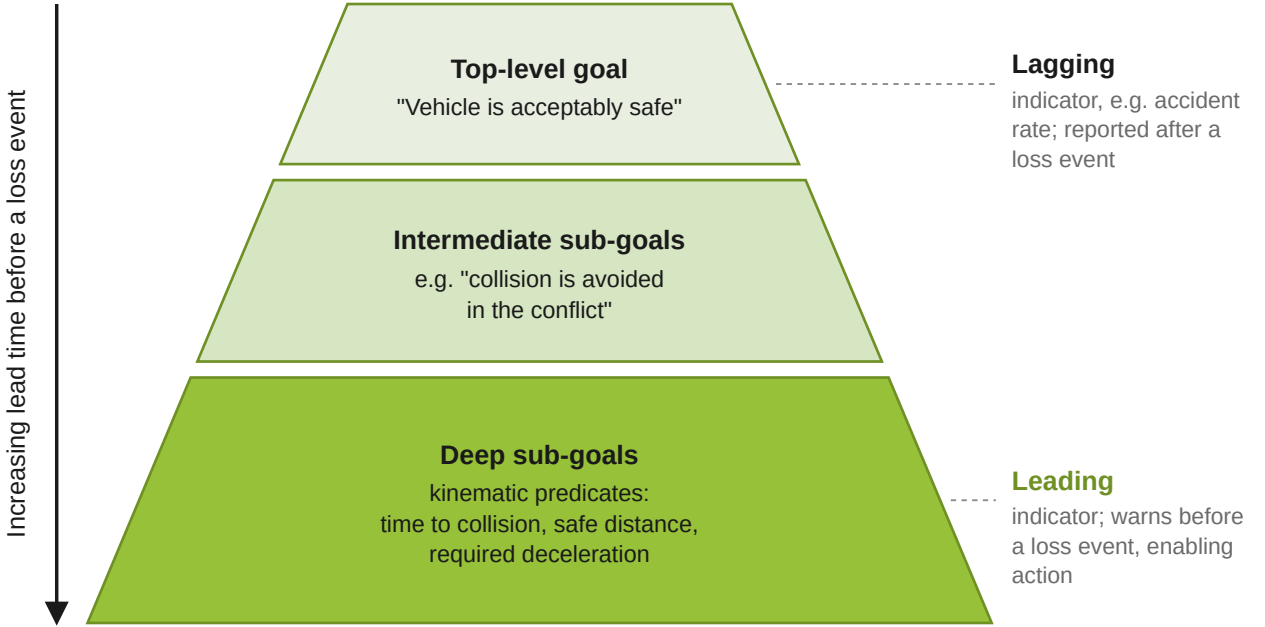
Increasing lead time before a loss event
Top-level goal
"Vehicle is acceptably safe"
Intermediate sub-goals
e.g. "collision is avoided
in the conflict"
Deep sub-goals
kinematic predicates:
time to collision, safe distance,
required deceleration
Lagging
indicator, e.g. accident
rate; reported after a
loss event
Leading
indicator; warns before
a loss event, enabling
action