


Industrial Equipment Manual

Left column. Disconnect power before installation.
This paragraph tests reading order and source coordinates in a two-column layout.

Right column. Verify the emergency stop and protective cover. The second column must follow the first in logical reading order.

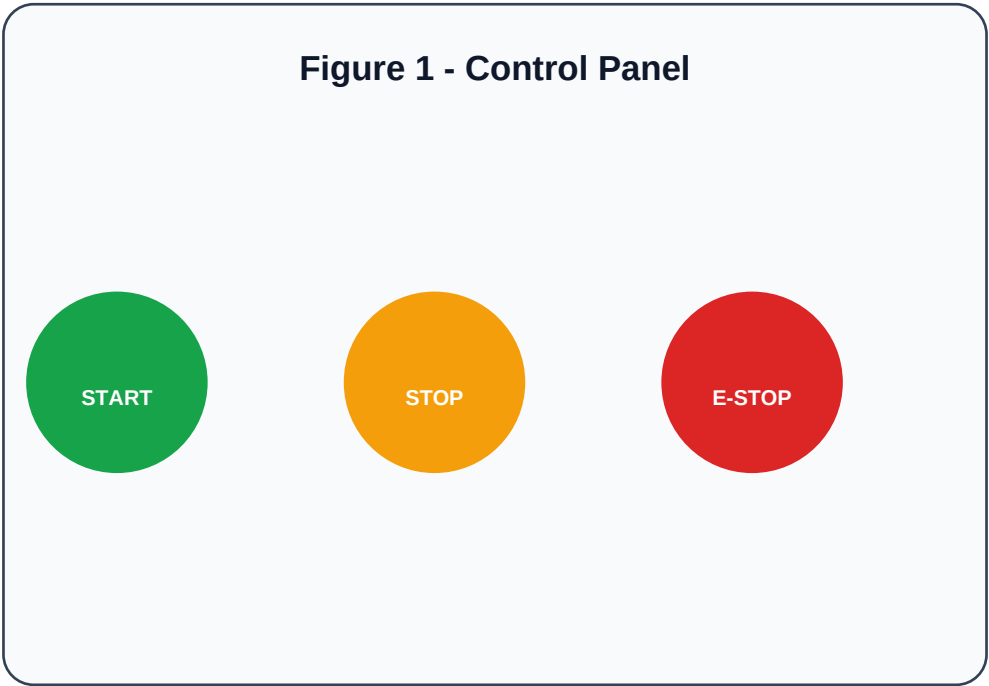

Footnote: control symbols are intentionally embedded in the figure.

Media Specifications

Media	Weight	Temperature	Notes
Plain paper	80 g/m2	15-30 C	Standard feed
Card stock	160 g/m2	15-25 C	Manual feed
Label	100 g/m2	18-25 C	One sheet
Envelope	90 g/m2	15-25 C	Close flap
Synthetic	120 g/m2	18-22 C	Low speed

Table continues on next page.

Media Specifications - continued

Media	Weight	Temperature	Notes
Coated paper	200 g/m2	18-22 C	Dry storage
Heavy card	220 g/m2	18-22 C	Single sheet
Film	110 g/m2	20-24 C	Avoid static

** Values measured at 50% relative humidity.*

SCANNED SAFETY NOTICE

HIGH TEMPERATURE HAZARD

Wear protective gloves.

Disconnect power before service.

OCR confidence sample: 0.91