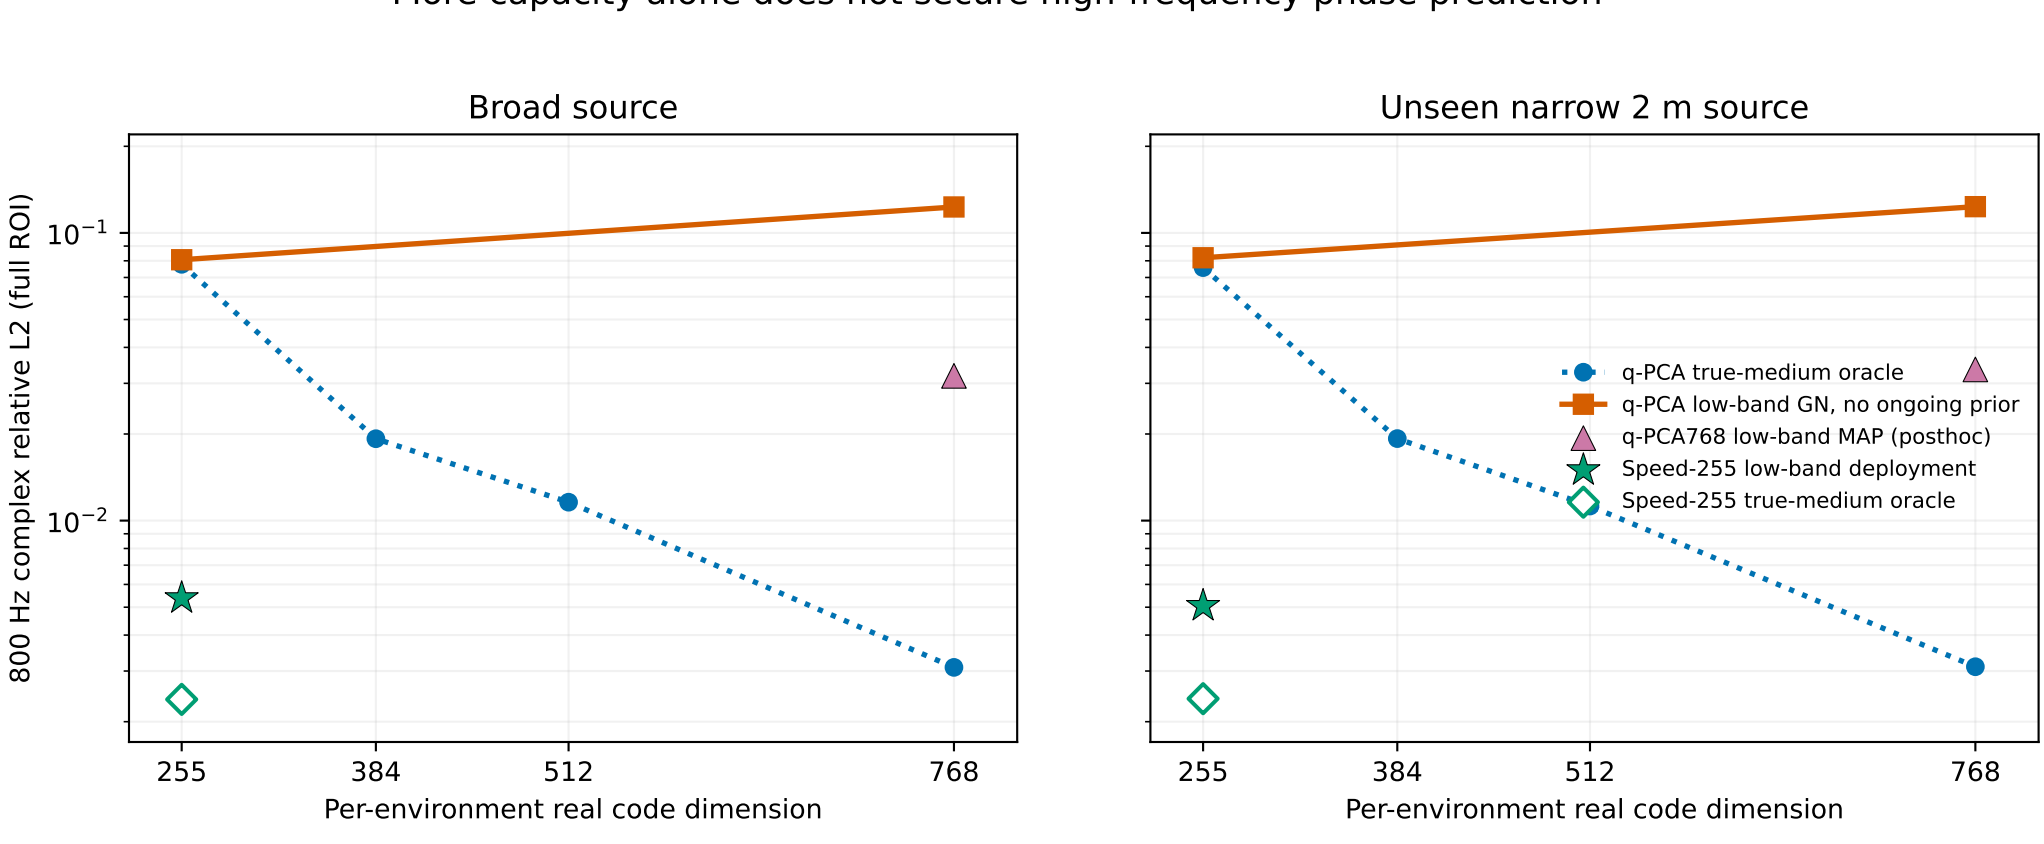
More capacity alone does not secure high-frequency phase prediction
Broad source
Unseen narrow 2 m source
800 Hz complex relative L2 (full ROI)
10^{-1}
10^{-2}
255
384
512
768
Per-environment real code dimension
q-PCA true-medium oracle
q-PCA low-band GN, no ongoing prior
q-PCA768 low-band MAP (posthoc)
Speed-255 low-band deployment
Speed-255 true-medium oracle
Dotted q curve and hollow speed markers READ true test media; solid low-band methods use only 60/100/140 Hz context.
MAP strength was chosen from used first 8; latter 8 is a conditional check, not an independent test. q-768 uses 3× q-255 code/storage.