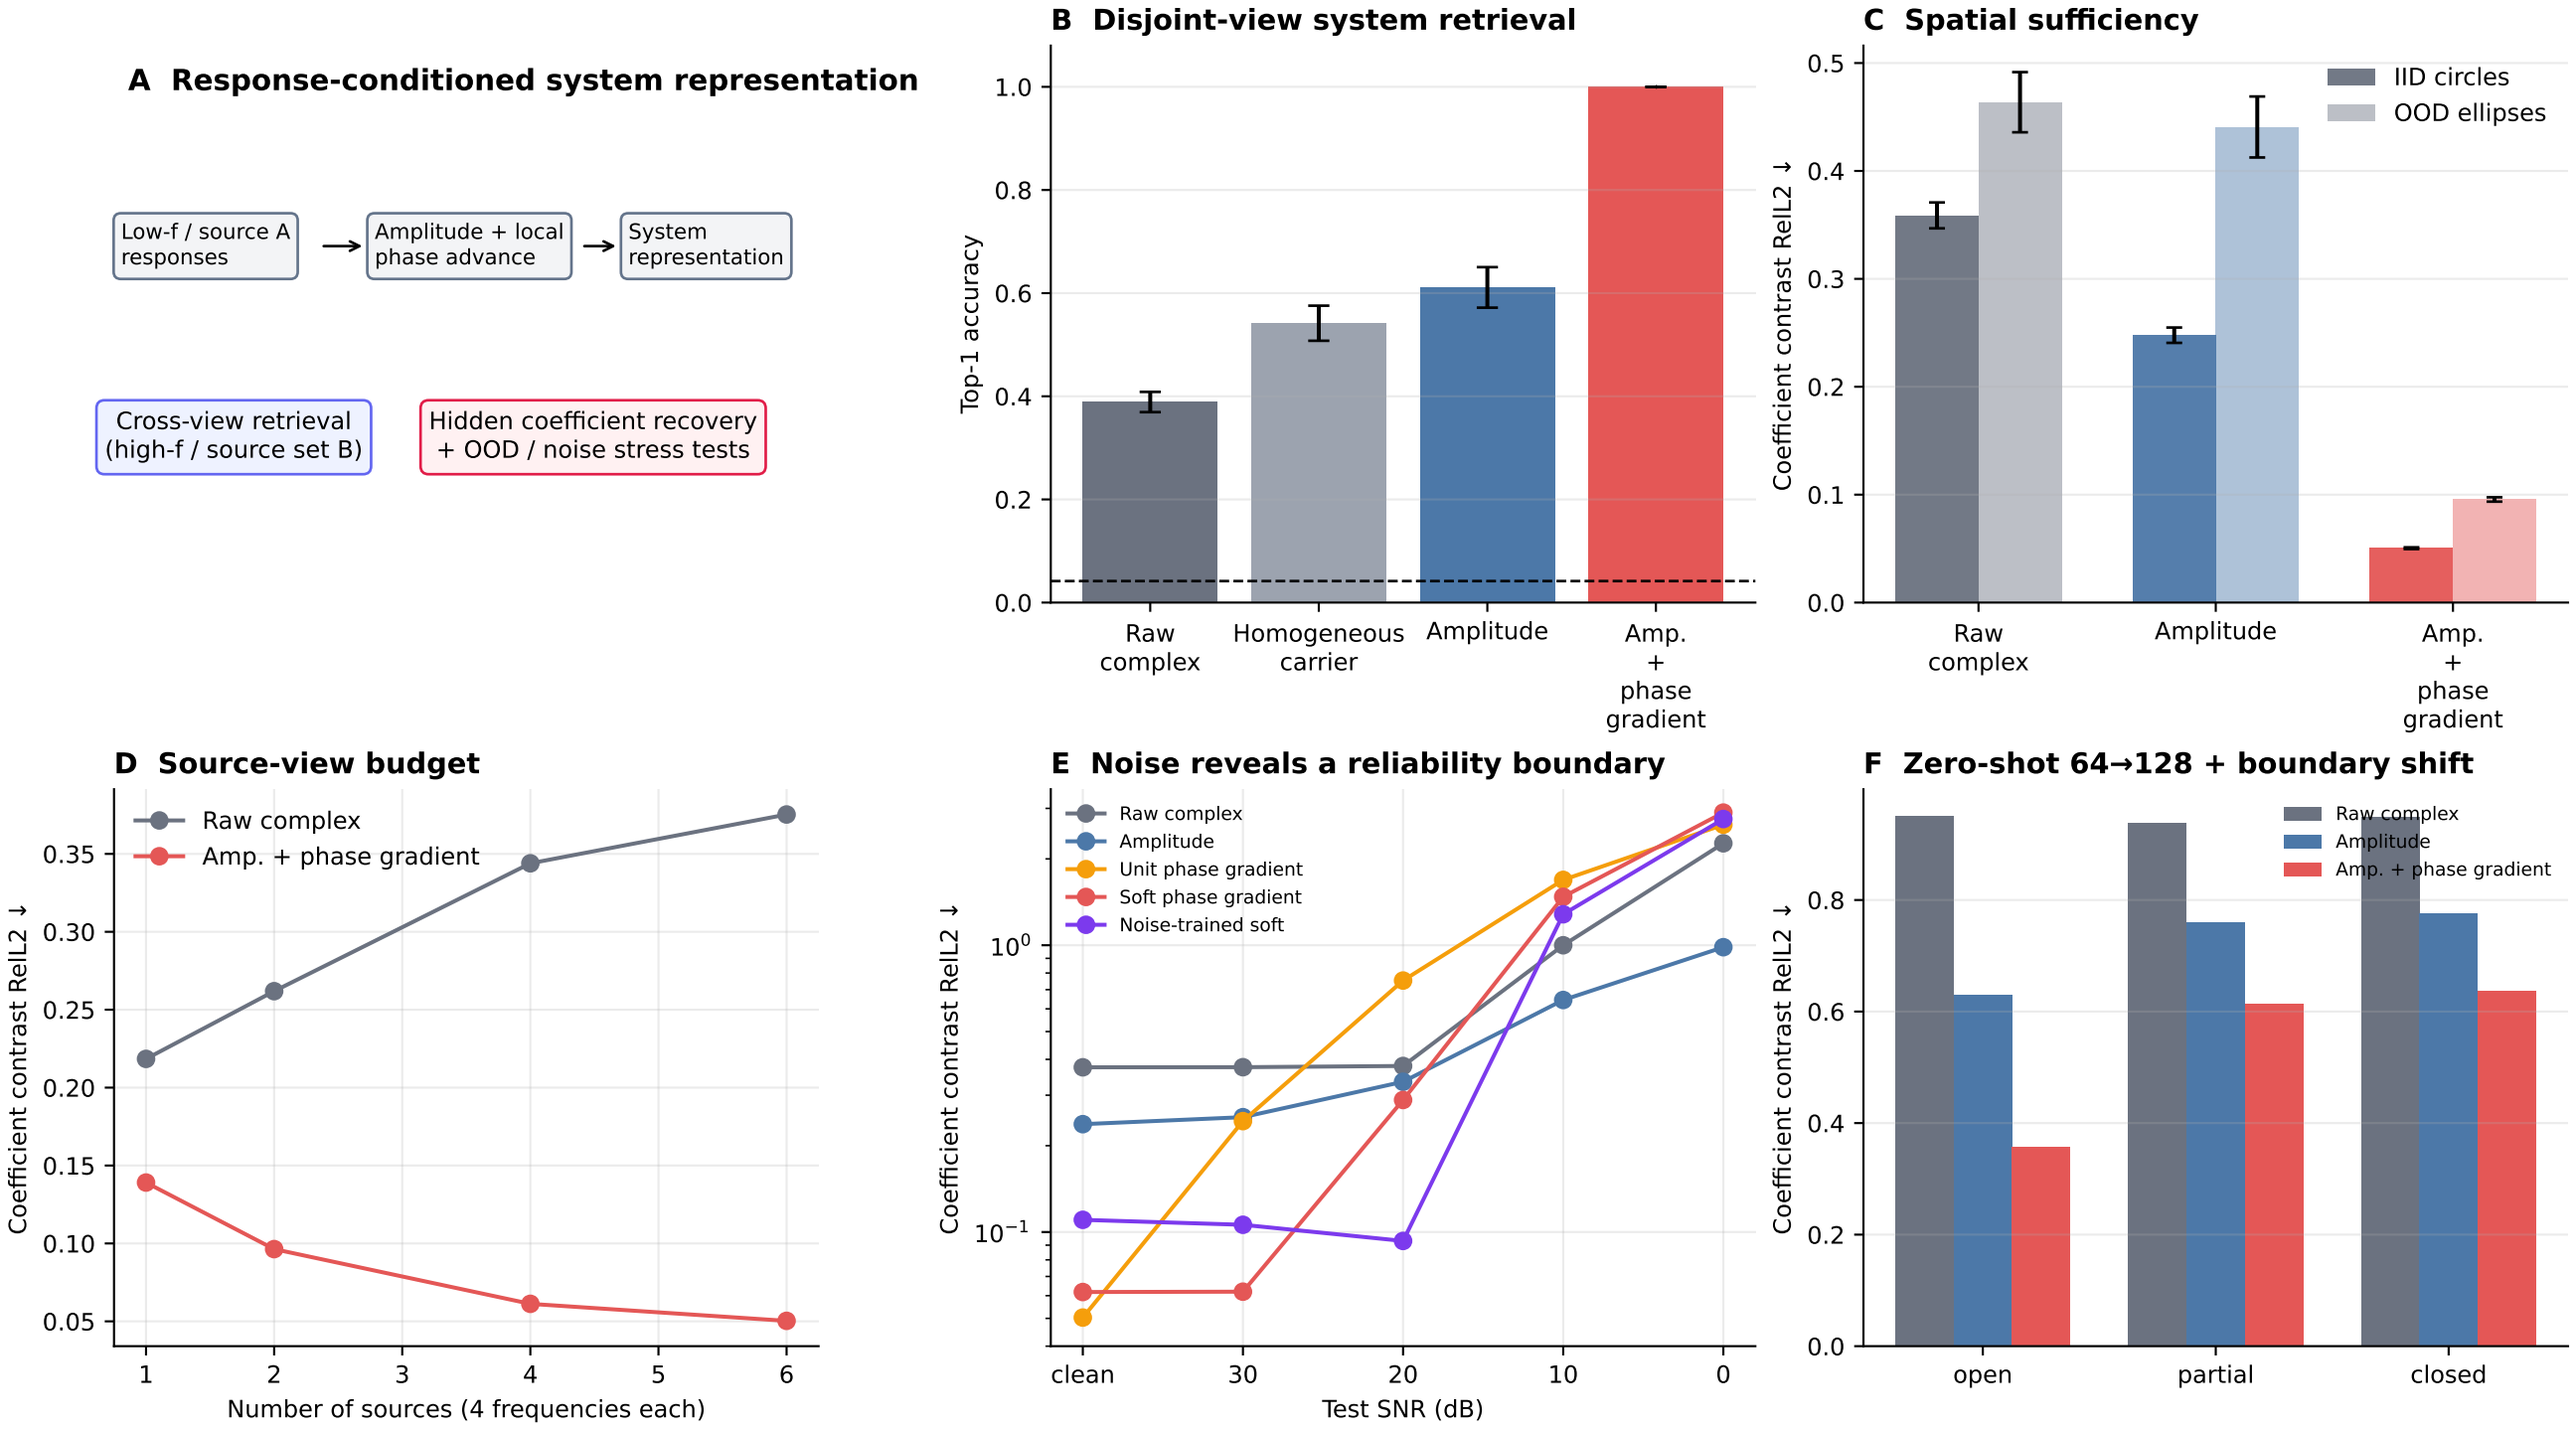
A Response-conditioned system representation
Low-f / source A responses
Amplitude + local phase advance
System representation
Cross-view retrieval (high-f / source set B)
Hidden coefficient recovery + OOD / noise stress tests
B Disjoint-view system retrieval
Top-1 accuracy
Raw complex
Homogeneous carrier
Amplitude
Amp. + phase gradient
C Spatial sufficiency
Coefficient contrast RelL2 ↓
IID circles
OOD ellipses
Raw complex
Amplitude
Amp. + phase gradient
D Source-view budget
Raw complex
Amp. + phase gradient
Coefficient contrast RelL2 ↓
Number of sources (4 frequencies each)
E Noise reveals a reliability boundary
Raw complex
Amplitude
Unit phase gradient
Soft phase gradient
Noise-trained soft
Coefficient contrast RelL2 ↓
Test SNR (dB)
clean
F Zero-shot 64→128 + boundary shift
Raw complex
Amplitude
Amp. + phase gradient
Coefficient contrast RelL2 ↓
open
partial
closed