
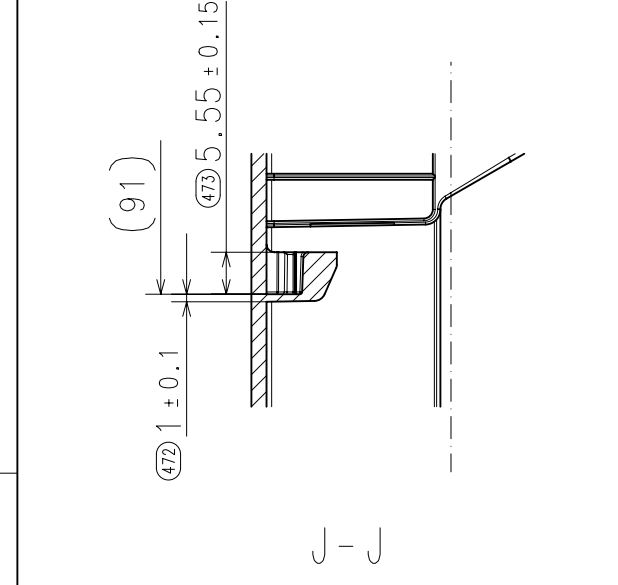



Alt. Ver.03	12	11	10	9	8	7	6	5	4	3	2	1
MO WORKING SPECS(only appl.)												
WALL T.	■	2.0 ± 0.1 mm(BASIC)										
DRAFT	■	DRAFT MUST GIVE THINNER SEC. FOR NOMINAL DIM.										
R VALUE	■	DRAFT ≤ 1° U.O.S.										
OVAL HOLE	■	CORN R ≤ 0.3 U.O.S.										
	■	1. CORNR R ≤ 0.2 U.O.S.										
FLASH, MARK	■	MAY BE										
	■	FLASH H ≤ 0.05										
INSERT	■	GT MK H ≤ 0.5 , D ≤ 0.2										
	■	EP MK H ≤ 0.1 , D ≤ 0										
SURF. TRT	■	TORSN STRGTH										
	■	N・cm MIN										
1ST. APPEA. TEX.	■	(kgf・cm MIN)										
	■	PULL-OUT STRGTH										
2ND. APPEA. TEX.	■	N(kgf)MIN										
	■	PROTR ≤ , RECS ≤										
QEM TEX.	■	LEAVE AT 20 ± 5°C 4h										
	■	CRITCL. INSP. DATA										
INT/EXTERIOR	■	REQ. FOR EACH LOT										
	■	TYPE FACE, SIZE U.O.S. : OPT.										
PRINTING	■	PROTRUSION: 0.2 OR SO										
	■	SPECL FOR QLT.Y ASSUR.										
HANDLING	■	REQ. No.										
	■	CERT. REQ.										
MEASURING	■	REQ. >PS-H1<										
	■	REGRIND RATE										
INSPECTION	■	ARTWORK NO.										
	■											

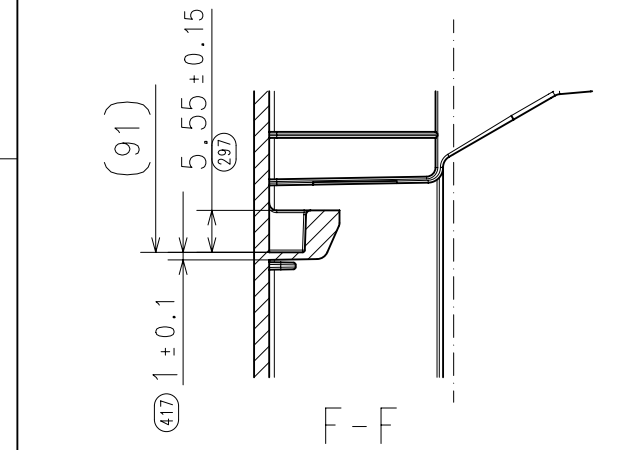

- 記事
1. リソグラフィ材料の使用25%以下
 2. 設計変更時の検査変更申請、及び、最終組立工程での品質管理が必要な部品である
 3. 指示なき自由曲面及び円筒は3Dデータによる
 4. 成型剤使用不可
 5. ▽ 指示部は外観面につき、傷、打痕、段差不可
 6. 凹陥、汚れ、異物、ごみ付着不可
 7. 外観面のヒケ、ウェルドライン、シルバーストリーク、フローマーク、ジェットインク、異点、しほムラ、カビ、傷、汚れは製造現場にて管理する
 8. P.L.L. スライド段差は0.05以下
 9. 段差の公差は±0.1
 10. 納入梱包形態は打合せによる
 11. ゲート、P.L.L.、E.P.、刻印の詳細は打合せによる
 12. ゲートファッシュ部品の最終決定は打合せによる
 13. 同等材の使用可能。材料色の変更可能なについては、設計者をめめ打合せを行い、材料正誤帳の更新も必ず行う

- NOTES
1. REGRIND MATERIAL MAY BE USED UP TO 25%
 2. FOLLOWING ACTIONS ARE REQUIRED : APPROVAL FOR CHANGE RELATED TO ELECTRICAL SAFETY REGULATION AT ENGINEERING CHANGE ; AND MANAGEMENT OF REVISION NUMBERS BY RESPONSIBLE PLANT
 3. UNLESS OTHERWISE SPECIFIED, FOR FREE-FORM SURFACES AND R-SURFACE, REFER TO 3-D DATA
 4. MOLD RELEASE AGENT NOT TO BE USED
 5. ▽ MARKED SURFACES, APPEARANCE, SHALL BE FREE FROM ANY FLASHES, SCRATCHES, DENTS AND DIRT
 6. PART SHALL BE FREE FROM ANY OIL, DIRT, FOREIGN SUBSTANCES AND DUST
 7. SINK MARKS, WELD LINES, SILVER STREAKS, FLOW MARKS, JETTING, BLACK POINTS, UNEVEN TEXTURE, CALLS, SCRATCHES AND DIRT OF APPEARANCE SURFACE SHALL BE CONTROLLED BY LIMIT SAMPLE
 8. OFFSET AT P.L. AND SLIDING DIE MISMATCH : 0.05 MAX
 9. TOLERANCE OF R AT EDGE LINE : ±0.1
 10. DELIVERY FORM WILL BE DECIDED AT MEETING
 11. DETAILS OF GATE, P.L.L., E.P. AND ENGRAVING WILL BE DECIDED AT MEETING
 12. DETAIL OF GATE BUSH HEIGHT WILL BE DECIDED AT MEETING
 13. PROPRIETY OF USE OF APPROXIMATE EQUIVALENT MATERIAL AND CHANGE OF MATERIAL COLOR WILL BE DECIDED AT MEETING INCLUDING DESIGNER, AND THEN CHANGE OF MATERIAL INDICATION IN DRAWING

型共通部品親図 / PARENT DRAWING OF COMMON MOLD PARTS
型共通部品は、型共通品目リスト: QC7-4047-000M102 を参照すること
FOR "COMMON MOLD PARTS"
REFER TO "COMMON MOLD/DIE SHARING PART ITEM LIST:QC7-4047-000M102"

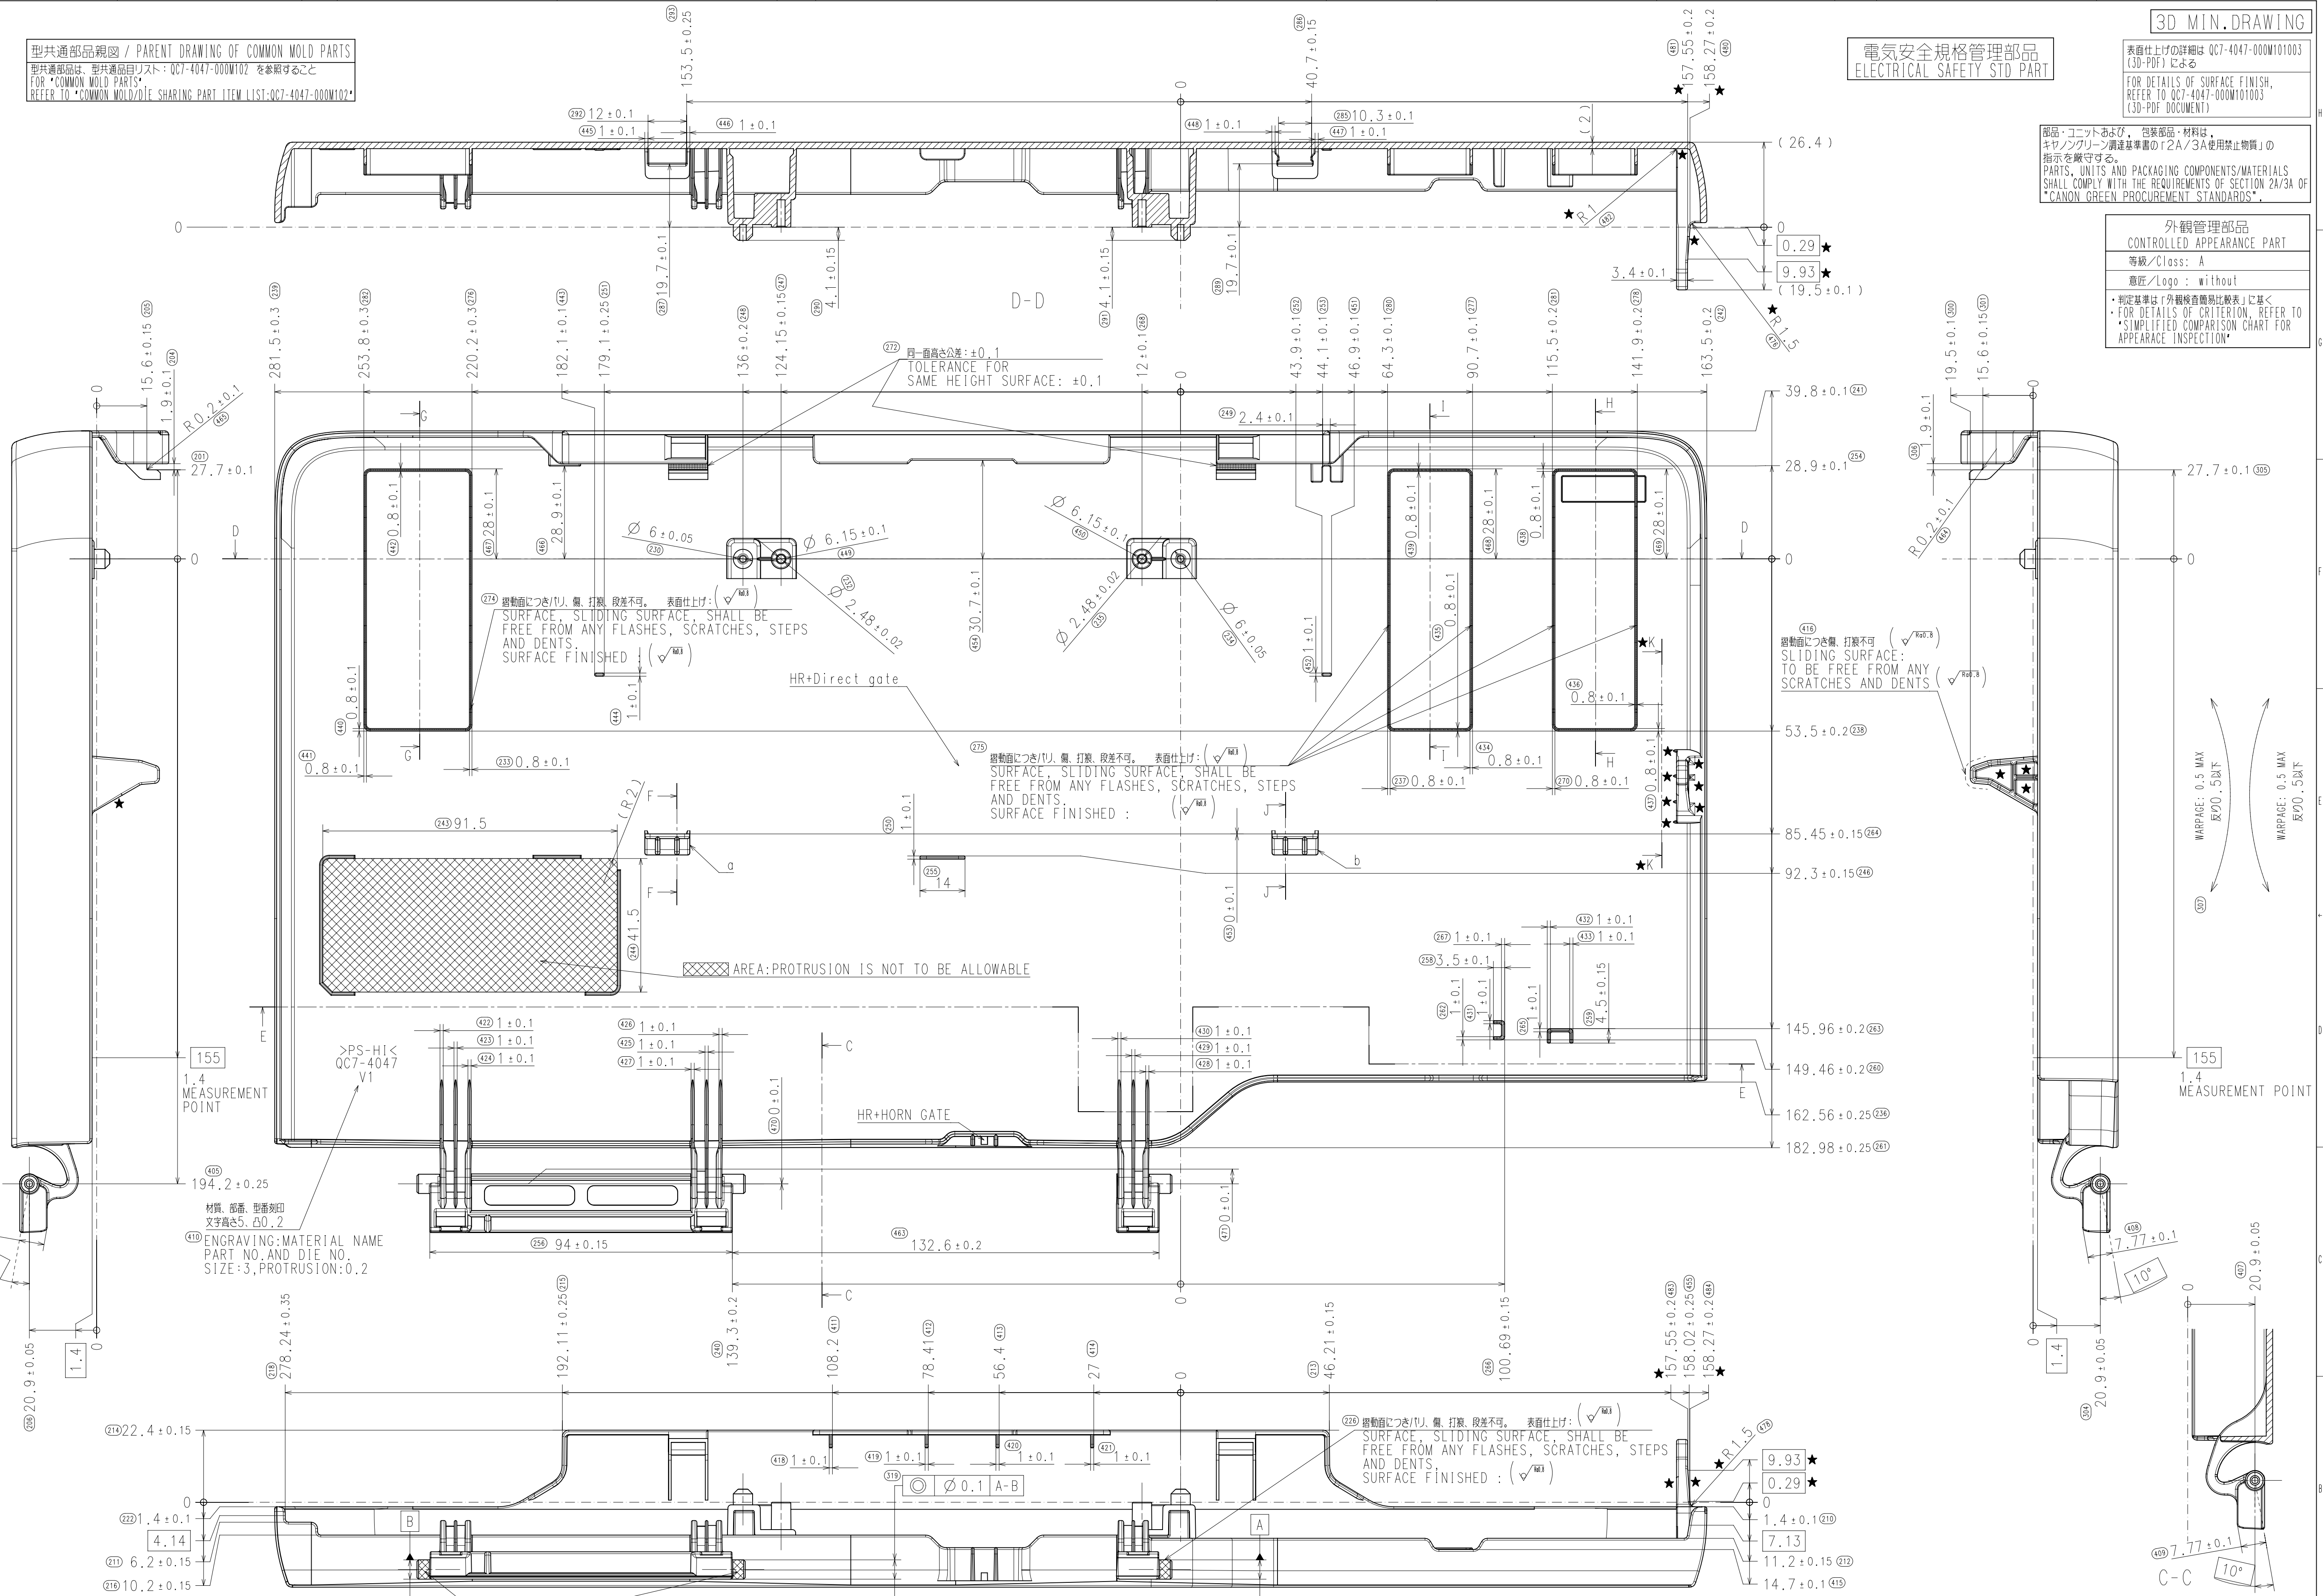

電気安全規格管理部品
ELECTRICAL SAFETY STD PART

3D MIN. DRAWING
表面仕上げの詳細は: QC7-4047-000M101003 (3D-PDF) による
FOR DETAILS OF SURFACE FINISH, REFER TO QC7-4047-000M101003 (3D-PDF DOCUMENT)

部品・ユニットおよび、包装部品・材料は、
キヤノングリーン調達基準書の「2A/3A使用禁止物質」の
指示を厳守する。
PARTS, UNITS AND PACKAGING COMPONENTS/MATERIALS
SHALL COMPLY WITH THE REQUIREMENTS OF SECTION 2A/3A OF
"CANON GREEN PROCUREMENT STANDARDS".




外観管理部品
CONTROLLED APPEARANCE PART
等級/Class: A
意匠/Logo: without
・判定基準は「外観検査簡易比較表」に基づく
・FOR DETAILS OF CRITERION, REFER TO
"SIMPLIFIED COMPARISON CHART FOR
APPEARANCE INSPECTION"

WARPAGE: 0.5 MAX
反り0.5以下
WARPAGE: 0.5 MAX
反り0.5以下


SURFACE TEXTURE SYMBOL	TOL. CLS.: Am No Rf	DAT.	SUB. DESIGNED BY	CHANGED BY	CHECKED BY	2ND APPROVED BY
▽	DIMENSION: x (+)					
▽	30 <x< 30 0.15					
▽	30 <x< 30 0.20					
▽	30 <x< 120 0.25					
▽	120 <x< 150 0.30					
▽	150 <x< 250 0.35					
▽	250 <x< 300 0.40					
▽	300 <x< 350 0.45					
▽	350 <x< 400 0.50					
▽	400 <x< 450 0.55					
▽	450 <x< 500 0.60					
▽	500 <x< 600 0.70					
▽	600 <x< 750 0.85					
▽	750 <x< 900 1.00					
▽	900 <x< 1000 1.20					
▽	ANGLE 1°					

MATERIAL PS	DESIGNED BY 629-4203	DATE 2021/06/30	REV. 008	CLS.	SCALE 1:1
MANUFACTURER PETROCHEMICALS (M) SDN. BHD	1JD				PAGE 1/2
GRADE/TP NO. MS500	中島 勝				
COLOR NAME DIM BLACK	DESIGNED BY 629-4203				
COLOR NO. NU-0215	1JD				
COLORING NO. -	中島 勝				
COL.DIF.CL. A	DRAWN BY				
NONF.LMBLTY JUL94 HB (APPROVED THICKNESS 1.5)					


REVISION NOTE (Chg shape ★x28)	PARTS NO. QC7-4047-000	SCALE 1:1
	PARTS ACCESS COVER N211	PAGE 1/2
	NAME	MAS.

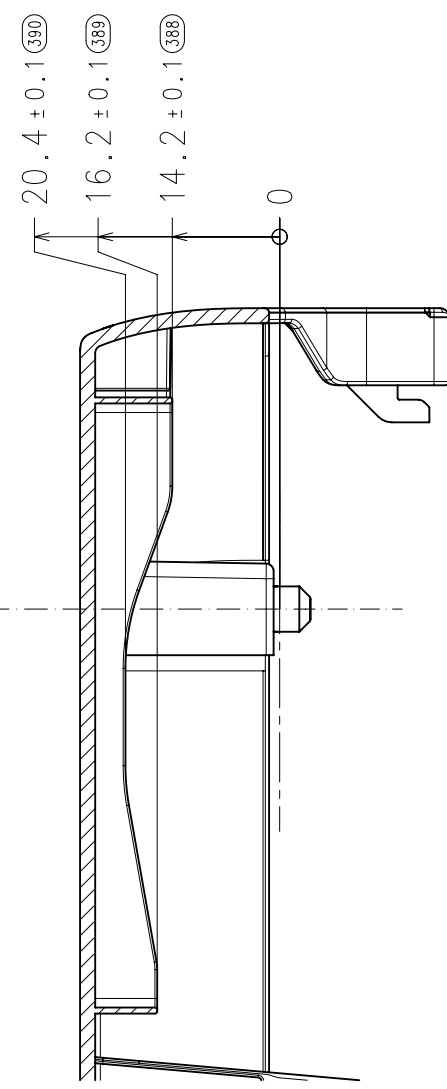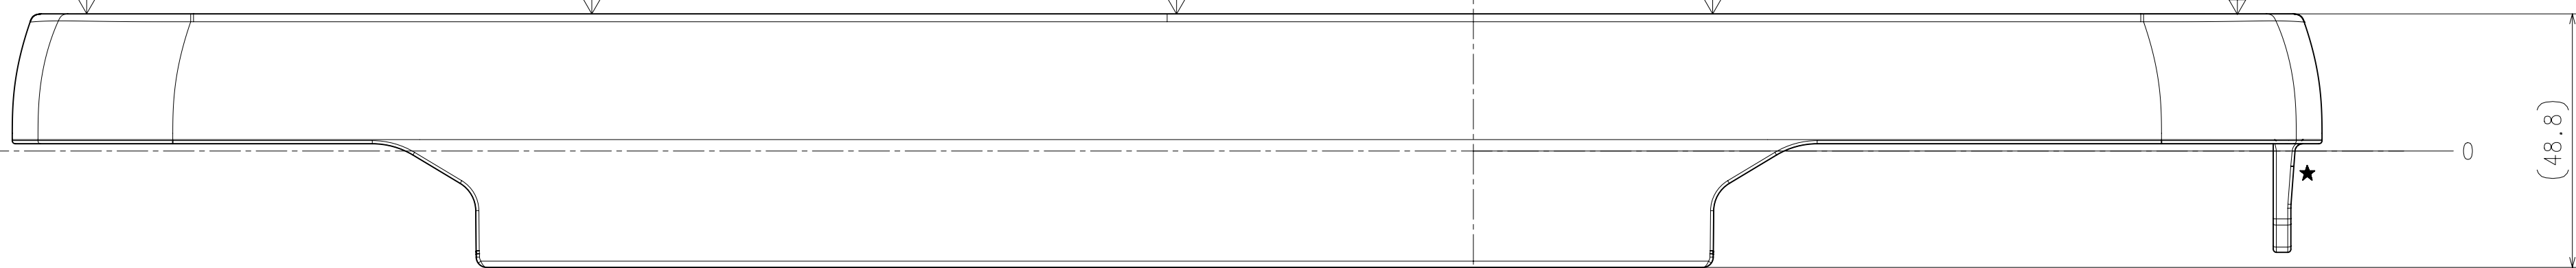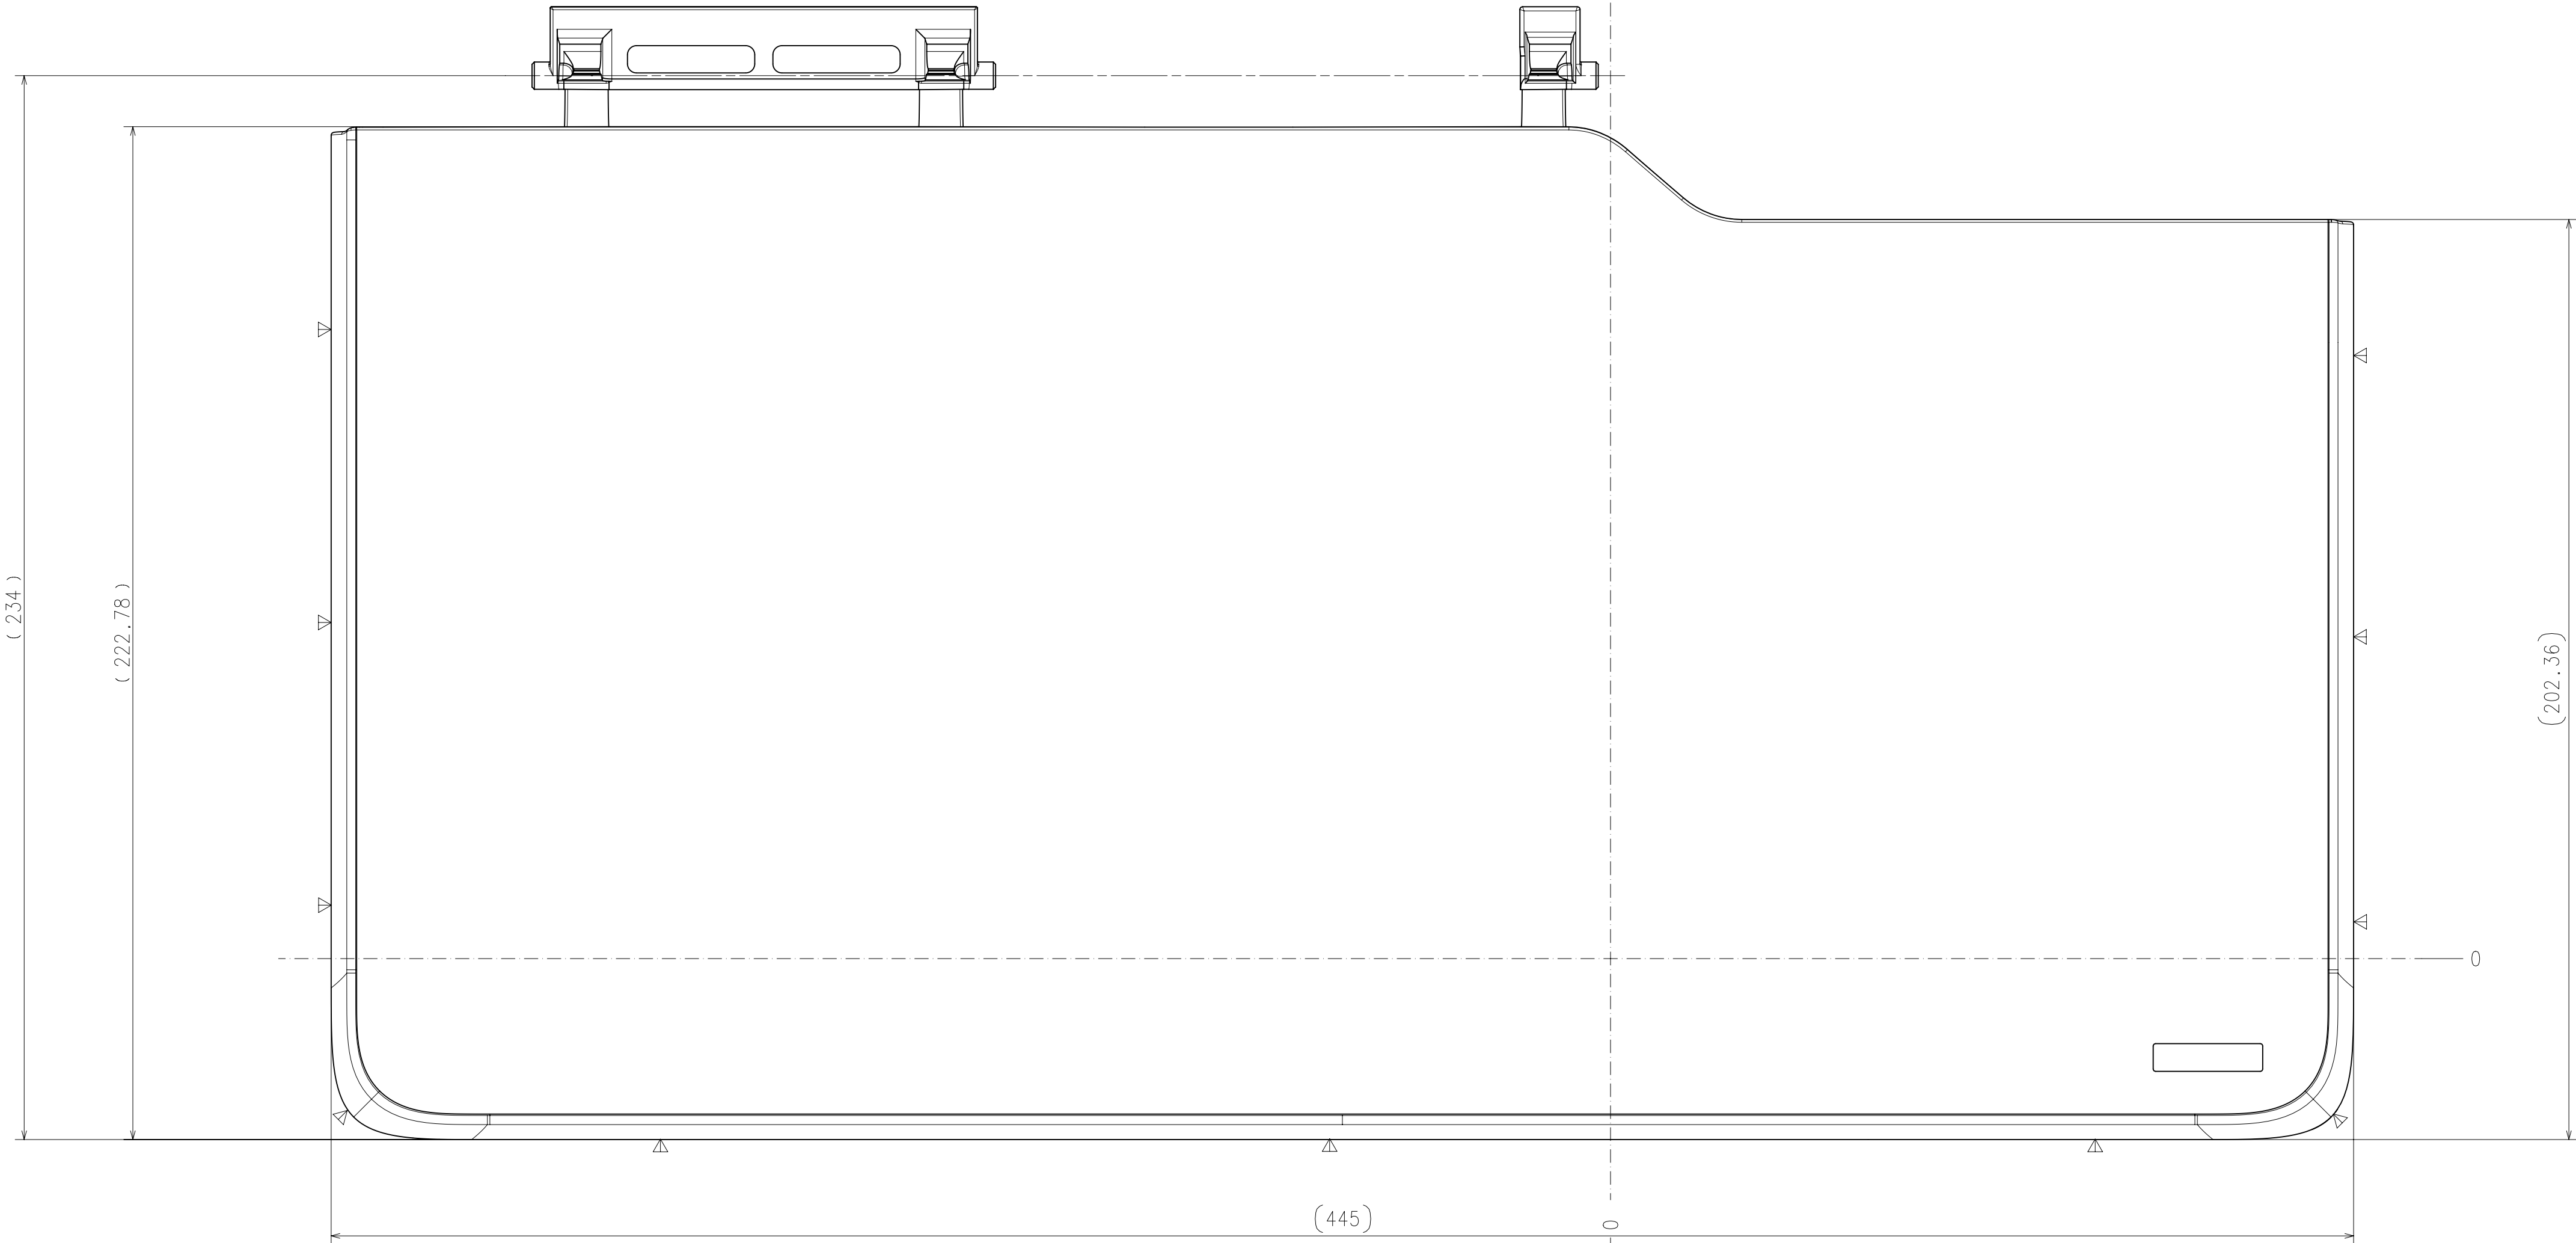


G-G

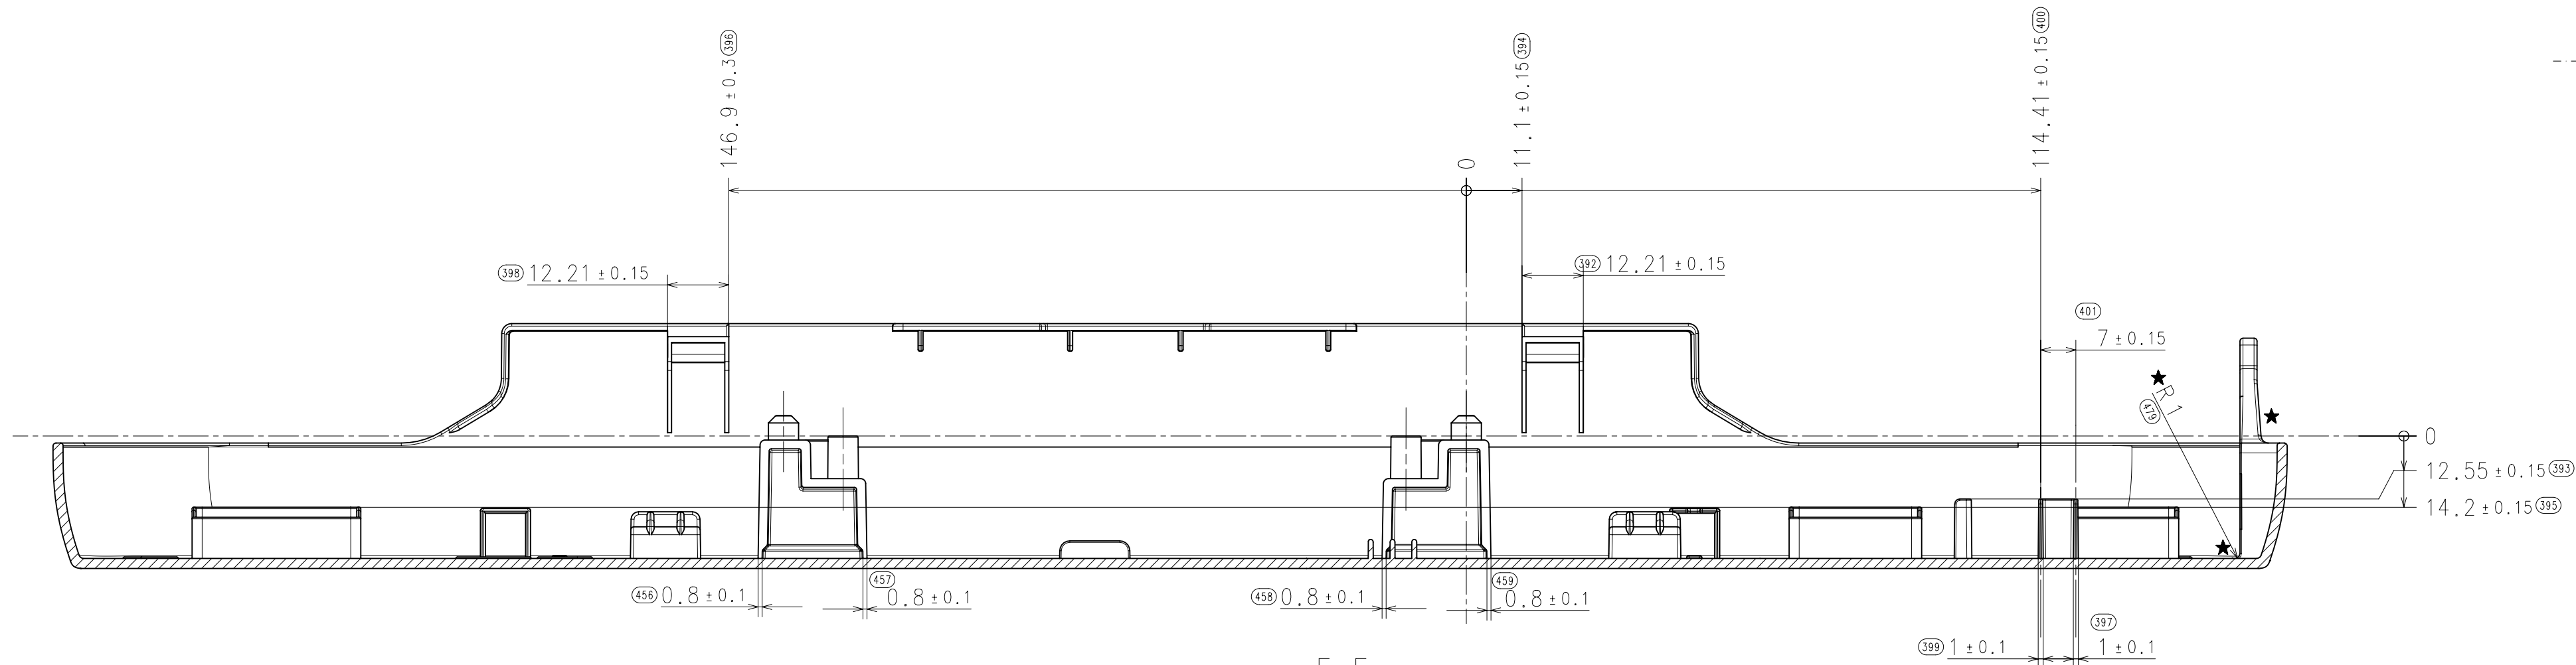


E-E

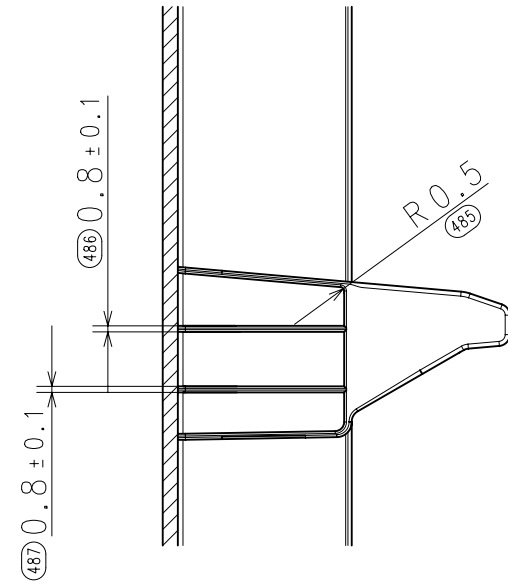

K-K

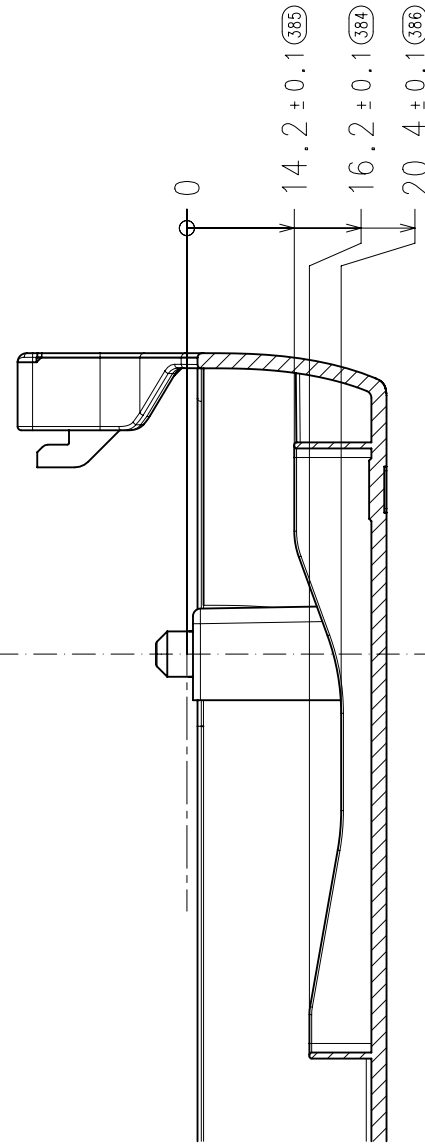

H-H

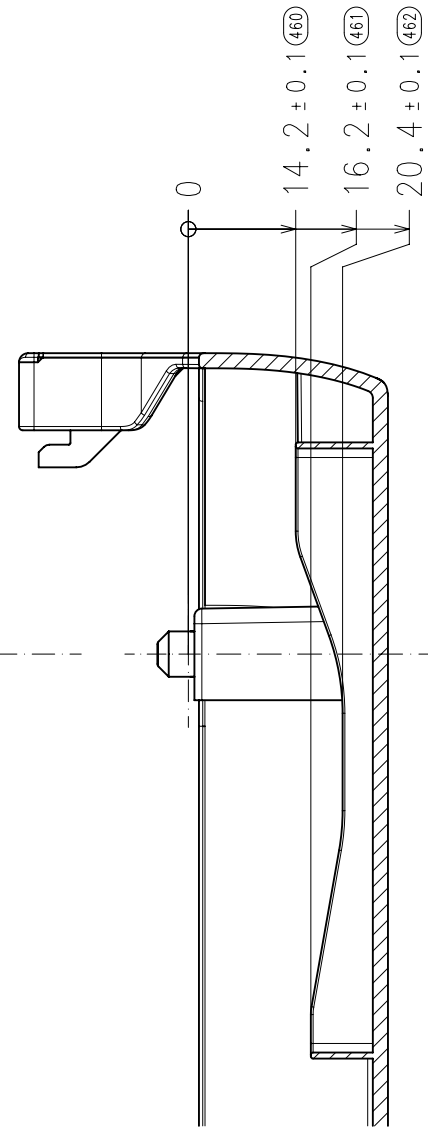

I-I

★/◎は設置箇所を指す ★/◎ DENOTES EC PLACE.			
SUB. DESIGNED BY	CHANGED BY	CHECKED BY	2ND APPROVED BY
—	—	—	—
1ST APPROVED BY 2021/06/30 沙月 瑞穂 沙月 瑞穂	REVISION NOTE (Chg shape ★x5)		
DESIGNED BY 629-4203 TJD 中島 昭	DATE 2021/06/30	REV. 008	CLS.
DRAWN BY	PARTS NO. QC7-4047-000	SCALE 1:1	
—	PARTS ACCESS COVER N211 NAME	PAGE 2/2	
			MAS. Canon