



JABATAN KESEHATAN DAN KESELAMATAN PEKERJAAN  
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




NO. VERIFIKASI: JKKP/2025/01-05/T-01/00722  
VERIFICATION NO.  
TARIKH: 24/06/2025  
DATE

NOZZLE c<sub>1</sub> TO OUTSIDE SHELL WELDING DETAIL  
接嘴 c<sub>1</sub> 与壳体外壁的焊缝详图



NAME PLATE SUPPORT TO SHELL WELDING DETAIL  
铭牌座与筒体的焊缝详图


NOZZLE c<sub>1</sub> TO FLANGE WELDING DETAIL  
接嘴 c<sub>1</sub> 与法兰的焊缝详图



SHELL TO SHELL AND HEAD WELDING DETAIL  
筒体与筒体和封头的焊缝详图


NOZZLE c<sub>2</sub> TO FLANGE WELDING DETAIL  
接嘴 c<sub>2</sub> 与法兰的焊缝详图

点焊长度6-10mm  
6 spot welding equal spaced  
均布6处点焊



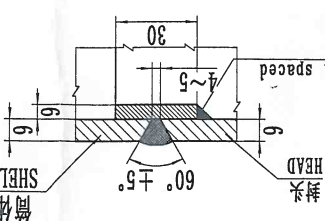


SHELL TO SHELL AND HEAD WELDING DETAIL  
筒体与筒体和封头的焊缝详图

NOZZLE c<sub>2</sub> TO NOZZLE WELDING DETAIL  
接嘴 c<sub>2</sub> 与接嘴的焊缝详图



NOZZLE a, b, d TO SHELL AND HEAD WELDING DETAIL  
接嘴 a, b, d 与壳体和封头的焊缝详图

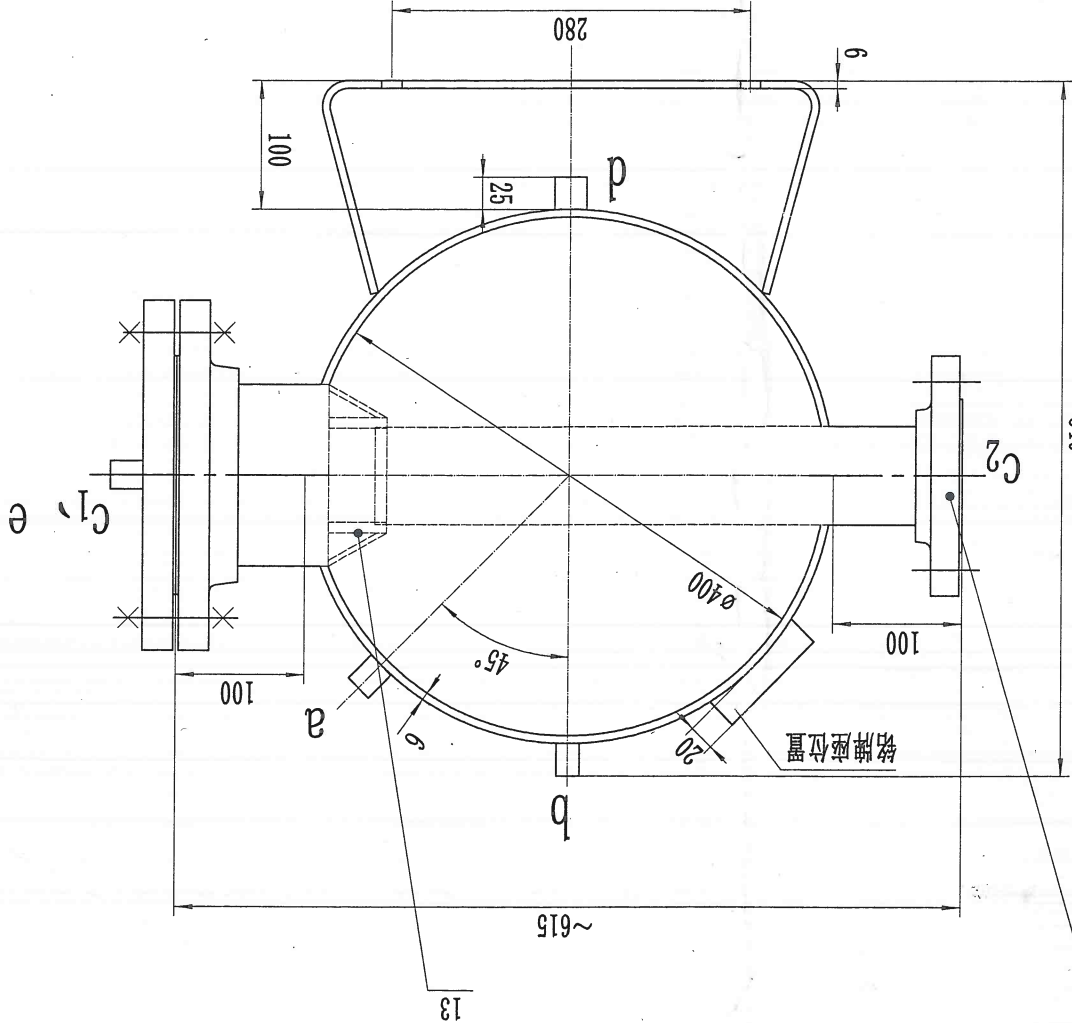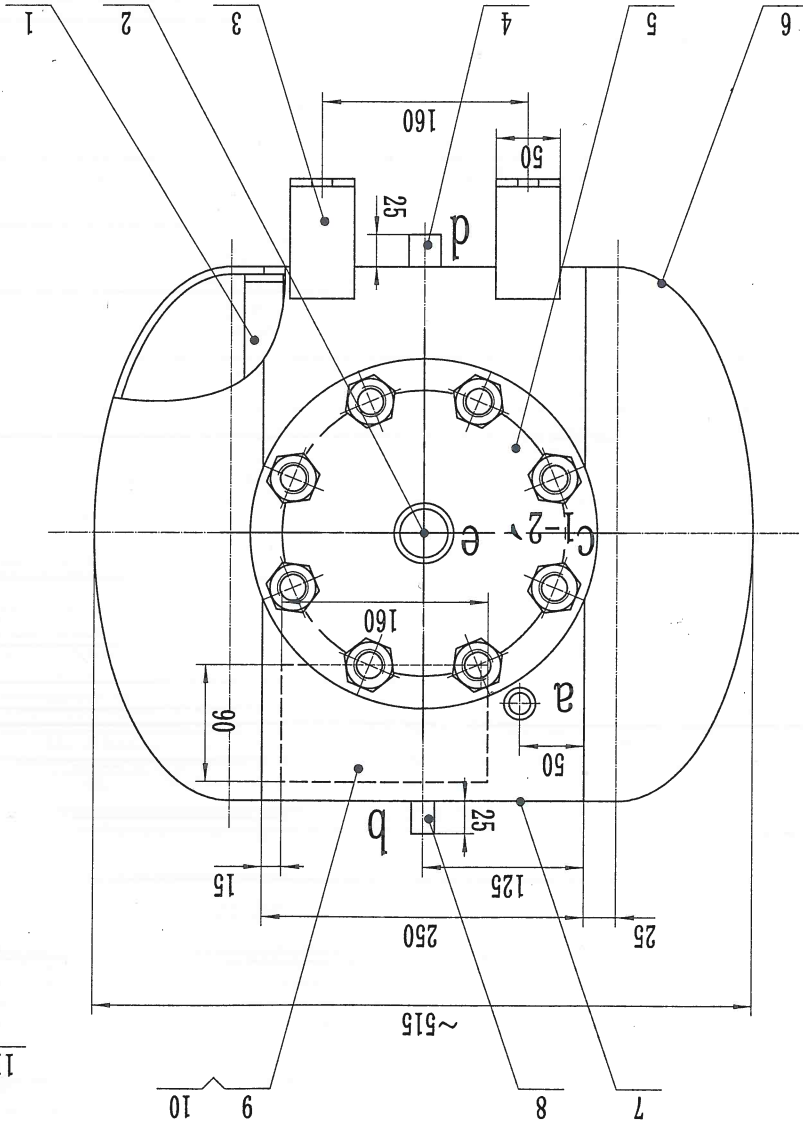

技术特性表 TECHNICAL FEATURES

|                               |                                              |                                     |                    |
|-------------------------------|----------------------------------------------|-------------------------------------|--------------------|
| 设计压力DESIGN PRESS. MPa         | 0.84                                         | 设计温度DESIGN TEMP. °C                 | 80                 |
| 操作压力OPERATING PRESS. MPa      | 0.8                                          | 工作温度WORK TEMP. °C                   | 80                 |
| 水压试验压力HYDR. TEST PRESS. MPa   | 1.1                                          | 介质MEDIUM                            | 压缩空气COMPRESSED AIR |
| 气压试验压力PNEU. TEST PRESS. MPa   | 1.0                                          | 气密性TOTAL VOLUME L                   | 50                 |
| 腐蚀裕量CORR. ALLOW. mm           | 0.85                                         | 设计重量WEIGHT Kg                       | ~72                |
| 焊接接头系数JOINT EFFICIENCY        | 0.8                                          | 设计重量WEIGHT Kg                       | ~122               |
| 无损检测METHOD OF INSPECTION      | 射线探伤RADIOGRAPHY                              | 周向应力周向应力UT-II(b)                    | 周向应力周向应力UT-II(b)   |
| 标识标识IDENTIFICATION MARK STAMP | ASME U                                       | 渗透探伤PENETRANT                       | 不要NO               |
| 介质特性MEDIUM NATURE             | 非腐蚀性NON-LETHAL                               | 主要受压元件材料MATERIAL OF MAIN COMPONENTS | SA-516M Gr. 485    |
| 消除应力热处理TEMP. °C               | 5                                            | 冲击试验IMPACT TEST                     | 冲击试验IMPACT TEST    |
| 表面处理FINISHING CLASS           | 表面喷砂处理BLASTING                               | 油漆PAINTING                          | 油漆PAINTING         |
| 设计标准DESIGN CODE               | ASME CODE SECTION VIII, DIV. 1, 2023 EDITION |                                     |                    |

技术要求TECHNICAL SPECIFICATION

- 所有受压部件的对接焊缝应采用全熔透焊缝，并应采用射线探伤（RT）100%检测，射线探伤应符合JB/T 4730.3-2005 B级合格标准。
- 管口、支腿和铭牌的方向按本图。
- 除图中注明外，角焊缝的厚度按连接板中较薄板的厚度，图中注明的角焊缝尺寸按本图。
- The leg of fillet weld shall equal to the thickness of thinner parts except otherwise specified in drawing. The leg size on this drawing is the minimum value.
- 压力试验合格后，内部清理干净外表面整体除锈，除锈等级达到SA2.5级，合格后涂防锈底漆，面漆各一道。
- The internal surface of the tank should be cleaned after hydrostatic test. Coat Antirust Primer and finish paint one time after passing test. The grade of rust cleaning reached SA2.5.
- 除另外注明外，本图所有尺寸均为毫米，未注公差遵循GB/T1804-2005中C等级的要求。
- Unless otherwise specified, all dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T1804-2005.
- 法兰螺栓孔跨中布置。
- The flange bolt holes shall straddle equipment centre line and be equal spaced.

管口表LIST OF NOZZLE

| 代号SYMBOL       | 数量QTY | 法兰标准FLANGE STD. | 公称尺寸SIZE | 规格CLASS  | 密封面SEALING | 类型TYPE | 接管NOZZLE   | 用途SERVICE |
|----------------|-------|-----------------|----------|----------|------------|--------|------------|-----------|
| a              | 1     | RF              | DN150    | Class150 | RF         | SO     | φ38X7      | 内接管       |
| b              | 1     | RF              | DN150    | Class150 | RF         | SO     | φ38X8      | 内接管       |
| c <sub>1</sub> | 1     | ASME B16.5-2020 | DN125    | Class150 | RF         | SO     | φ41.3X9.53 | 接管        |
| c <sub>2</sub> | 1     | ASME B16.5-2020 | DN65     | Class150 | RF         | SO     | φ23X9.53   | 接管        |
| d              | 1     | RF              | DN65     | Class150 | RF         | SO     | φ22X7      | 接管        |
| e              | 1     | RF              | DN65     | Class150 | RF         | SO     | φ35X7      | 接管        |

|                               |                                              |                                     |                    |
|-------------------------------|----------------------------------------------|-------------------------------------|--------------------|
| 设计压力DESIGN PRESS. MPa         | 0.84                                         | 设计温度DESIGN TEMP. °C                 | 80                 |
| 操作压力OPERATING PRESS. MPa      | 0.8                                          | 工作温度WORK TEMP. °C                   | 80                 |
| 水压试验压力HYDR. TEST PRESS. MPa   | 1.1                                          | 介质MEDIUM                            | 压缩空气COMPRESSED AIR |
| 气压试验压力PNEU. TEST PRESS. MPa   | 1.0                                          | 气密性TOTAL VOLUME L                   | 50                 |
| 腐蚀裕量CORR. ALLOW. mm           | 0.85                                         | 设计重量WEIGHT Kg                       | ~72                |
| 焊接接头系数JOINT EFFICIENCY        | 0.8                                          | 设计重量WEIGHT Kg                       | ~122               |
| 无损检测METHOD OF INSPECTION      | 射线探伤RADIOGRAPHY                              | 周向应力周向应力UT-II(b)                    | 周向应力周向应力UT-II(b)   |
| 标识标识IDENTIFICATION MARK STAMP | ASME U                                       | 渗透探伤PENETRANT                       | 不要NO               |
| 介质特性MEDIUM NATURE             | 非腐蚀性NON-LETHAL                               | 主要受压元件材料MATERIAL OF MAIN COMPONENTS | SA-516M Gr. 485    |
| 消除应力热处理TEMP. °C               | 5                                            | 冲击试验IMPACT TEST                     | 冲击试验IMPACT TEST    |
| 表面处理FINISHING CLASS           | 表面喷砂处理BLASTING                               | 油漆PAINTING                          | 油漆PAINTING         |
| 设计标准DESIGN CODE               | ASME CODE SECTION VIII, DIV. 1, 2023 EDITION |                                     |                    |

|    |                 |                                |    |                 |      |    |
|----|-----------------|--------------------------------|----|-----------------|------|----|
| 序号 | 图号或标准号          | 名称及规格                          | 数量 | 材料              | 重量   | 备注 |
| 1  | HKA0287-01      | 衬圈Back Ring 30X61              | 1  | SA-516M Gr. 485 | 1.7  |    |
| 2  | HKA0287-02      | 丝扣螺纹耦合器Threaded coupling Rp1/2 | 2  | SA-105M         | 0.2  |    |
| 3  | HKA0287-03      | 支架式支架Bracket Support           | 2  | SA-516M Gr. 485 | 1.4  |    |
| 4  | HKA0287-04      | 排污口Drain outlet Rp1/2          | 1  | SA-105M         | 0.12 |    |
| 5  | HKA0287-05      | 检修孔Access Opening DN125        | 1  | COMPONENT       | 20.1 |    |
| 6  | HKA0287-06      | 2:1锥形封头CONICAL HEAD DN150      | 2  | SA-516M Gr. 485 | 9.7  |    |
| 7  | HKA0287-07      | 筒体SHELL ID400 6-61             | 1  | SA-516M Gr. 485 | 15.0 |    |
| 8  | HKA0287-08      | 安全阀口Safety Valve NP1/2         | 1  | SA-105M         | 0.2  |    |
| 9  | HKA1-01         | 铭牌Nameplate                    | 1  | SA-516M Gr. 485 | 0.2  |    |
| 10 | HKA1-00         | 铭牌Nameplate                    | 1  | COMPONENT       | 0.05 |    |
| 11 | ASME B16.5-2020 | 法兰FLANGE DN65 CL150 SO/RF      | 1  | SA-105M         | 3.45 |    |
| 12 | ASME B36.10M    | 接管NOZZLE OD73X9.53             | 1  | SA-105M Gr. B   | 6.7  |    |
| 13 | ASME B36.10M    | 接管NOZZLE OD88.9X7.62           | 1  | SA-105M Gr. B   | 0.75 |    |

