




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKPP/2025/01-05/T-01/00721
VERIFICATION NO.
TARIKH: 24/08/2025
DATE

12.5
▽

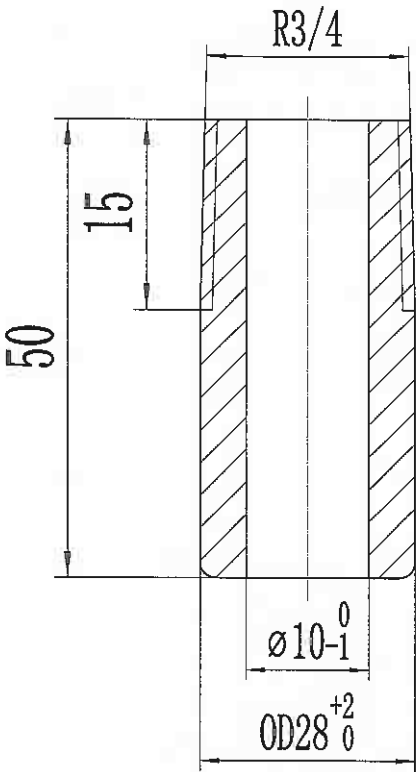

- 1、本图所有尺寸均为毫米
all dimensions are in millimeters
- 2、材质: SA-105M Material: SA-105M

排污口Drain outletR $\frac{3}{4}$				SA-105M	HKA0286-01/REV. 1
设计Design	韩恭东	日期Date	2024.10.8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.	
批准Approved	韩恭东	日期Date	2024.10.8		

借 (通) 用 件 登 记
旧底图总号
底图总号
签 字
日 期
档案员 日 期





JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00721

TARIKH:
DATE 24/08/2025

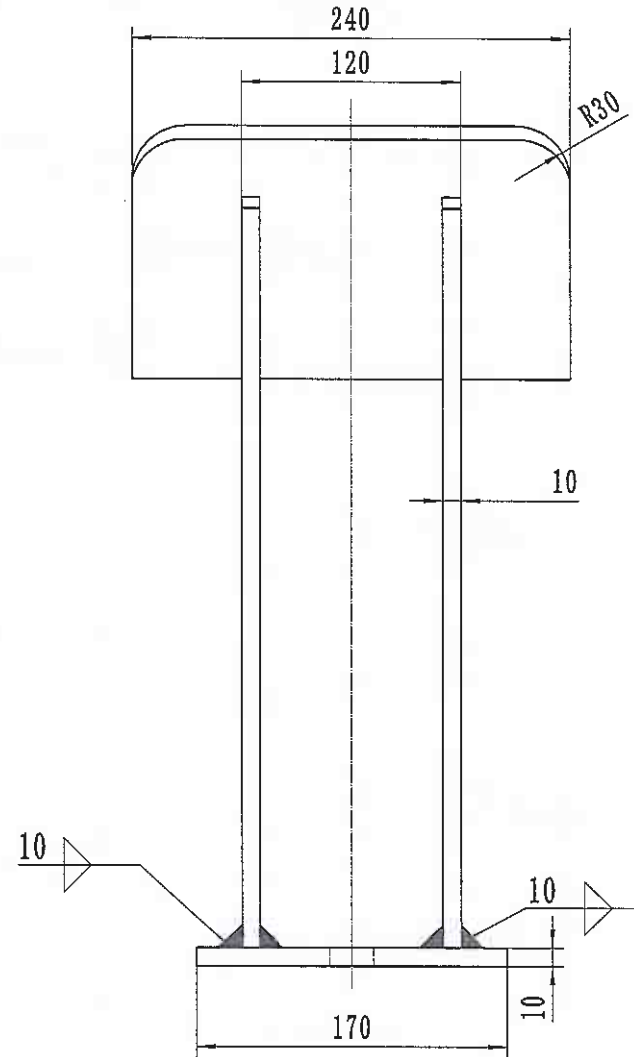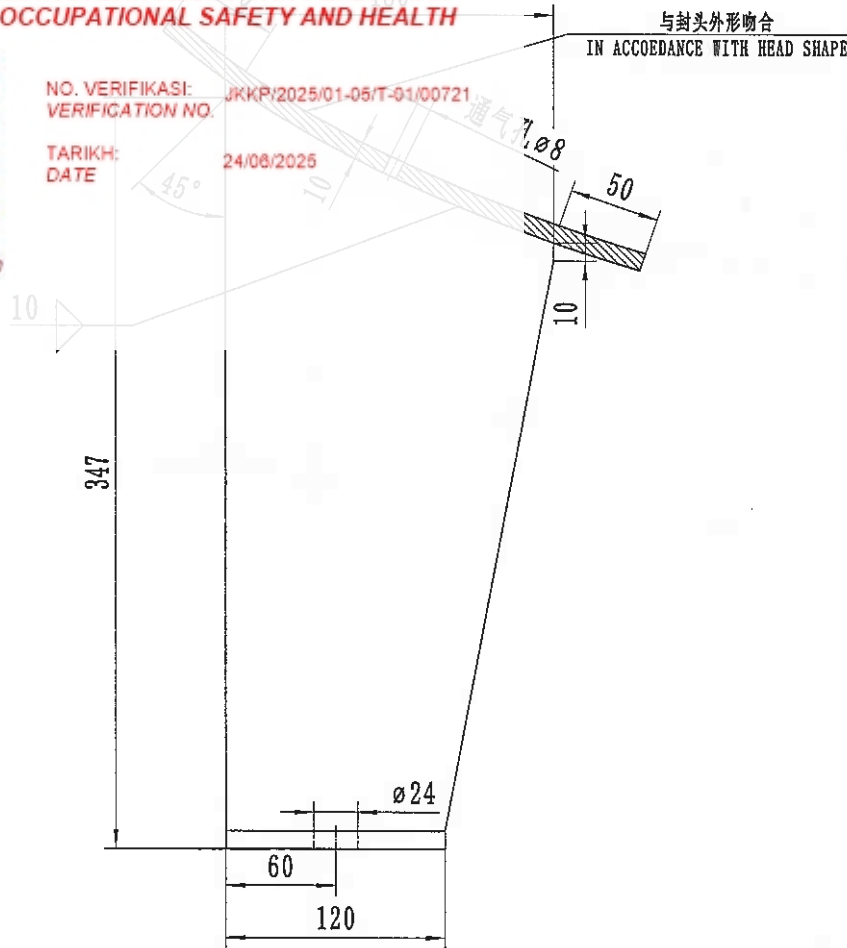

注NOTES:

1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；

All dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;

2、所有角焊缝双面连续焊，其焊角高度按较薄板厚度。

All fillet weld joints are continuous at both sides with the height of the fillet weld shall equal to the thickness of thinner parts.

3	垫板Subplate	δ=10	1	SA-516M Gr.485	4.35	
2	筋板Rib plate	δ=10	2	SA-516M Gr.485	3.77/7.54	
1	底板Baseplate	δ=10	1	SA-516M Gr.485	1.6	
序号S/N	规格Spec.	名称及规格Name and Spec.	数量Qty.	材料Material	重量Weight(kg)	备注Remark
支座 SUPPORT			COMPONENT		HKA0286-02/REV. 1	
设计Design	日期Date	青岛海空信合工程有限公司				
批准Approved	日期Date	QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.				




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKPP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

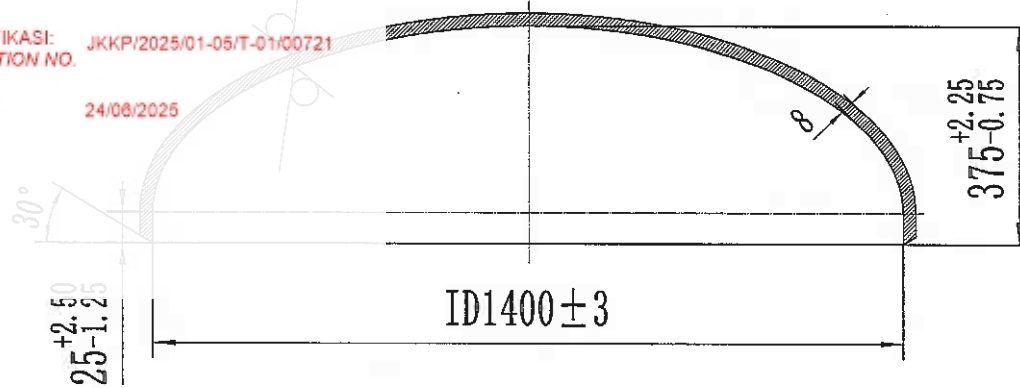

其余 $\frac{25}{\nabla}$

注NOTES:

1. 封头成形后的最小厚度不小于7.2mm;

The min. thickness of the formed head shall be no less than 7.2mm

2. 除另外注明外, 本图所有尺寸均为毫米, 形状公差应符合UG-81的规定;

Unless otherwise specified, all dimensions are in millimeters, the

Shape tolerances shall conform of UG-81;

3. 材质: SA-516M Gr.485 Material: SA-516M Gr.485

图 (组) 用
件 表 号

出图图号

底图总号

数 字

日 期

批准人 | 日 期

2:1椭圆封头ELLIPSOIDAL HEAD ID1400×8 (7.2)

SA-516M Gr485

HKA0286-03/REV. 1

设计Design

韩恭东

日期Date

2024.10.8

批准Approved

韩恭东

日期Date

2024.10.8

青岛海空信合工程有限公司

QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification


NO. VERIFIKASI: JKPP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

821

ID1400±7

其余 $\frac{25}{\nabla}$

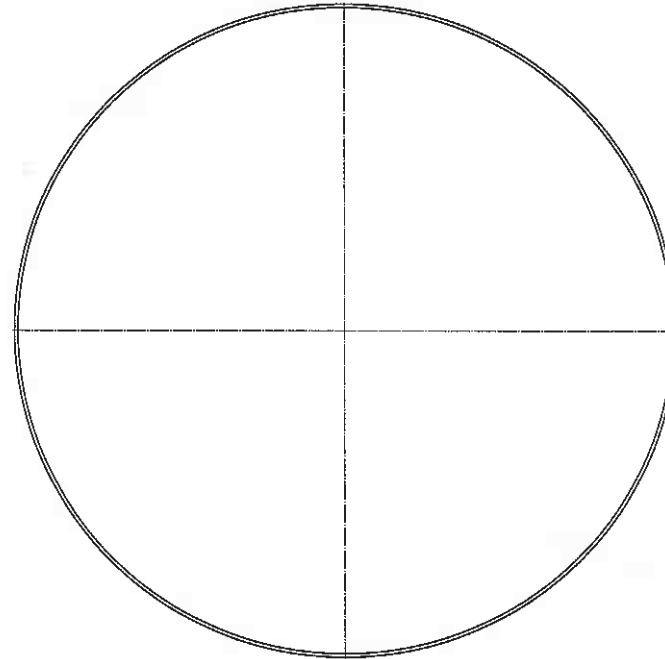

注NOTES:

- 所有受压部件的焊缝应采用全熔透焊缝, 并应采用焊缝识别卡 (JIC) 上指定的WPS施焊;
All welds of pressure parts shall be full penetration welded, using the applicable WPS specified in Joint Identification Card(JIC).
- 筒体最大内径与最小内径差小于等于14mm;
The deviation of maximum and minimum inner diameter is not exceed 25mm.
- 材质: SA-516M Gr. 485 Material: SA-516M Gr. 485

筒体SHELL ID1400 $\delta=8$		SA-516M Gr. 485		HKA0286-04/REV. 1	
设计Design	韩恭东	日期Date	2024.10.8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.	
批准Approved	韩恭东	日期Date	2024.10.8		

借 (通) 用
件 登 记

旧底图总号

底图总号

签 字

日 期

档案员 日 期



TARIKH:
DATE



- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
all dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、所有角焊缝双面连续焊，其焊角高度按较薄板厚度。
All fillet weld joints are continuous at both sides with the height of the fillet weld shall equal to the thickness of thinner parts.

Technical drawing of a square frame. The vertical dimension is 75, the horizontal dimension is 150, and the hole diameter is $\varnothing 16$.

人孔MAN HOLE	COMPONENT	HKA0286-05/REV. 1
------------	-----------	-------------------

青島海空信合工程有限公司
QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.

借件	(期)	用
登	登	记
底图总号		
底图总号		
登 字		
日 期		
档案员	日 期	




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKPP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

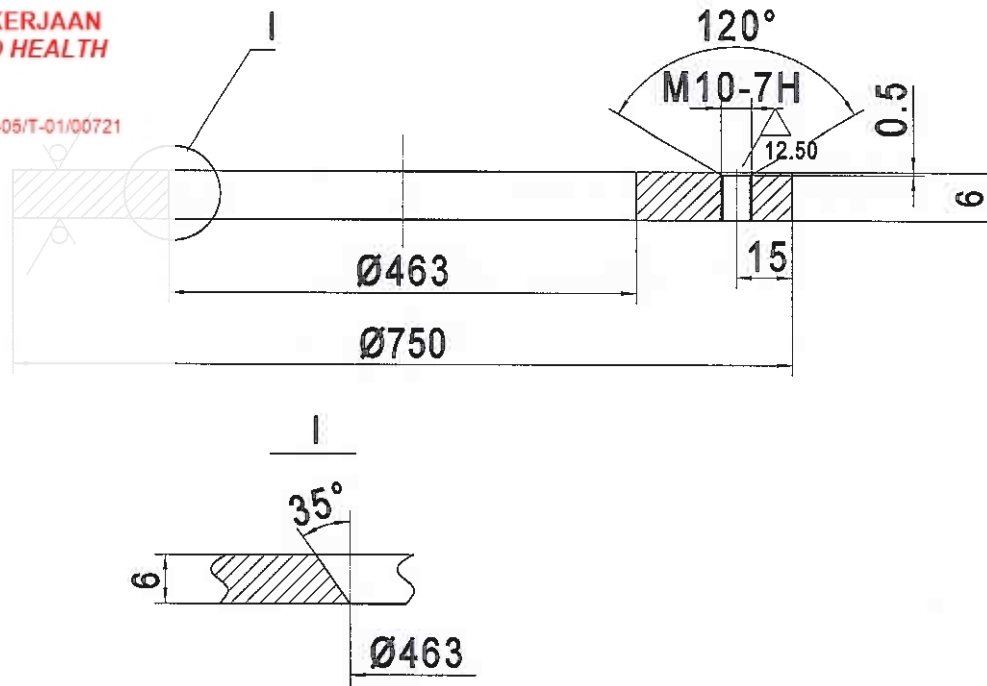

注NOTES:

- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
All dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、材质: SA-516M Gr.485 Material: SA-516M Gr.485

借 (通) 用 件 登 记
旧底图总号
底图总号
签 字
日 期
档案员 日期

补强圈REINFORCEMENG PAD Ø750×6		SA-516M Gr. 485		HKA0286-06/REV.0
设计Design	韩恭东	日期Date	2024.10.8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.
批准Approved	韩恭东	日期Date	2024.10.8	





JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKJP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

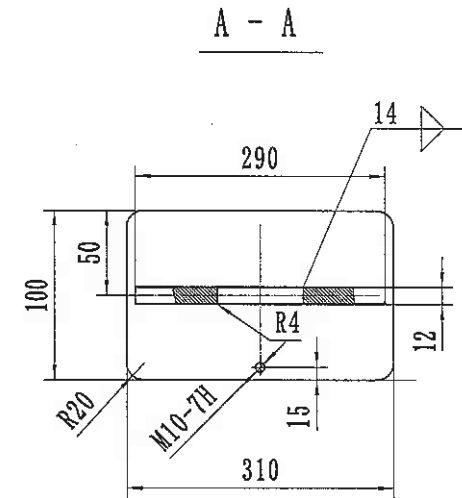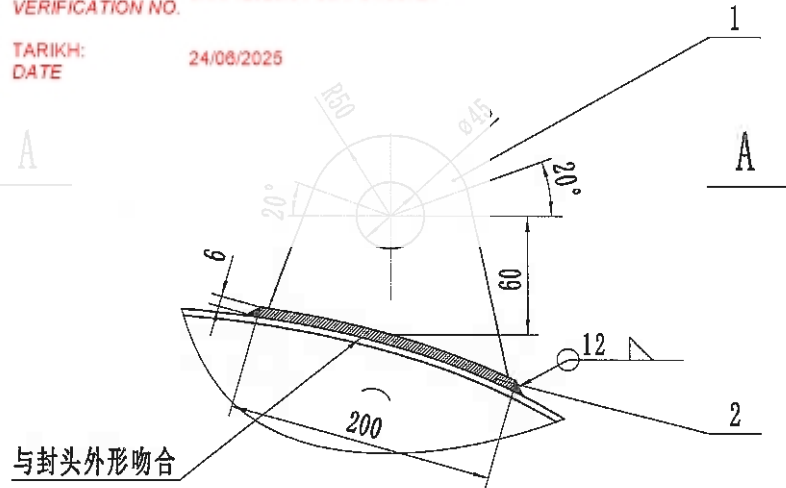

注NOTES:

- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
all dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、材质：SA-516M Gr485 Material: SA-516M Gr485
- 3、所有角焊缝双面连续焊，其焊角高度按较薄板厚度。
All fillet weld joints are continuous at both sides with the height of the fillet weld shall equal to the thickness of thinner parts.

借(通)用
件登记

旧底图总号

底图总号

签字

日期

档案员 日期

2		垫板 Pad 200×100×6	1	SA-516M Gr. 485		3.1	
1		吊耳 LUG	1	SA-516M Gr. 485		1.3	
序号S/N	图号或标准号WC. No./STD. No.	名称及规格Name and Spec.	数量QTY.	材料Material	单件Single 重量Weight(kg)	总计Total	备注Remark
吊耳LIFTING LUGS			SA-516M Gr. 485		HKA0286-07/REV.1		
设计Design	韩泰尔	日期Date	2024.10.8				
批准Approved	韩泰尔	日期Date	2024.10.8				
青島海空信合工程有限公司							
QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.							




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKPP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

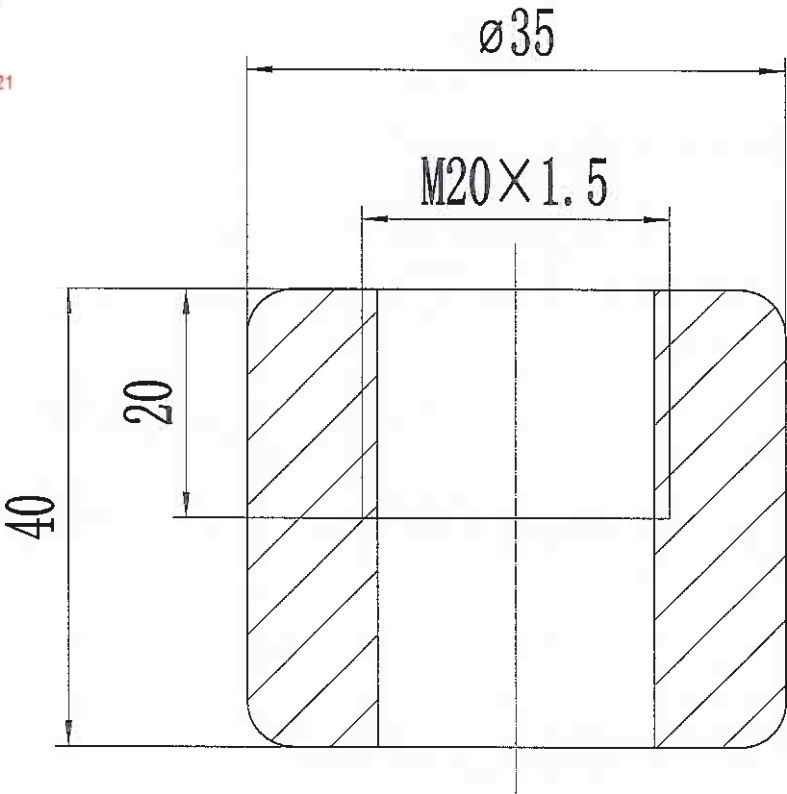

12.5

- 1、本图所有尺寸均为毫米
all dimensions are in millimeters
- 2、材质: SA-105M Material: SA-105M

压力表口NOZZLE FOR PRESSURE GAGUE M20×1.5				SA-105M	HKA0286-08/REV. 1
设计Design	韩恭东	日期Date	2024.10.8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.	
批准Approved	韩恭东	日期Date	2024.10.8		

借 (通) 用 件 登 记
旧底图总号
底图总号
签 字
日 期
档案员 日 期




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKPP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

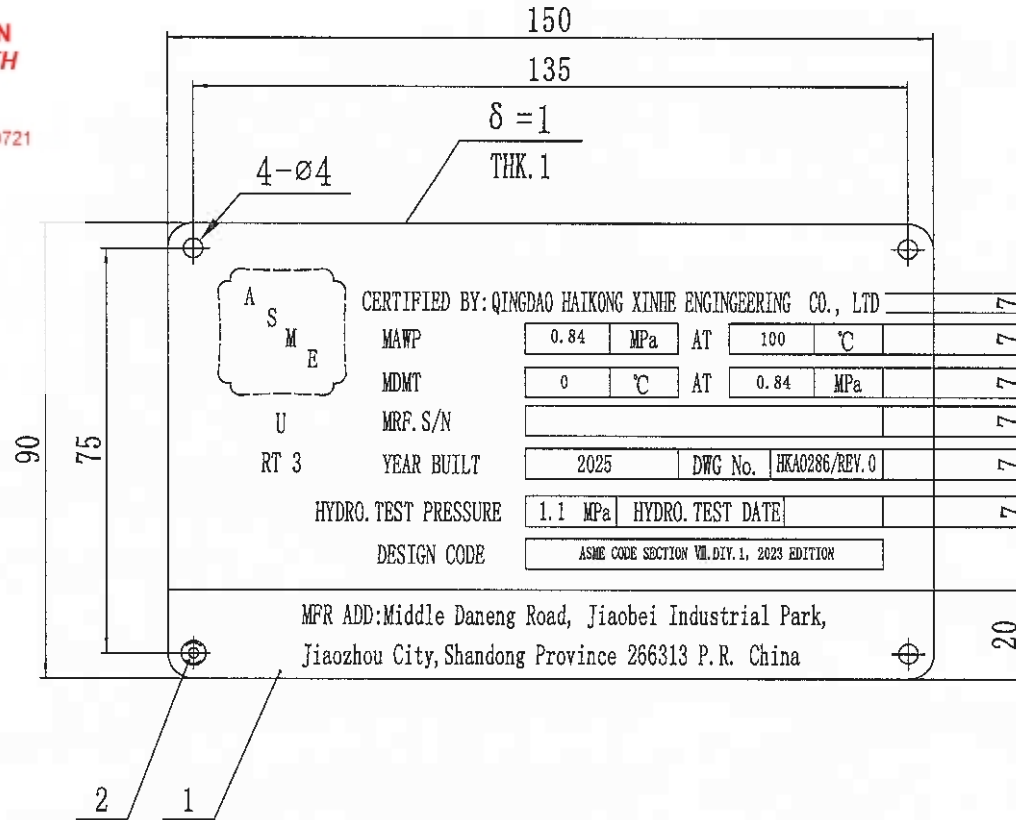

1. 铭牌表面不涂漆。

The Surface of the nameplate shall be left unpainted.

2. ASME认证标记用钢印打在铭牌上。

The Certification Mark shall be stamped on the nameplate.

3. 所有标志可用蚀刻、雕刻或钢印标在铭牌上，所有字符应凹进至少0.1mm；

Nameplates may have markings produced by either etching, debossing or stamping. Characters shall be concaved at least 0.1mm deep.

4. 所有标记和字符应清晰且高度不得小于4mm。

The required markings on a nameplate shall be legible and in characters not less than 4 mm high.

5. 产品编号: A24U063

Product number: A24U063

2	GB827-86	铆钉Rivet3×8	4	L3			
1		铭牌Nameplate	1	S30408		0.1	
序号NO.	图号或标准号DWG. NO. OR STD. NO.	名称及规格NAME AND SIZE	数量QTY.	材料MATERIAL	单件重量SINGLE WEIGHT	总重量TOTAL WEIGHT	备注REMARKS
铭牌Nameplate		90×150	HKAT-00/REV.1				
设计Design	韩泰东	日期Date	2024.10.8	青岛海空信合工程有限公司			
审核Audit	韩泰东	日期Date	2024.10.8	QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.			




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00721
VERIFICATION NO.

TARIKH: 24/08/2025
DATE

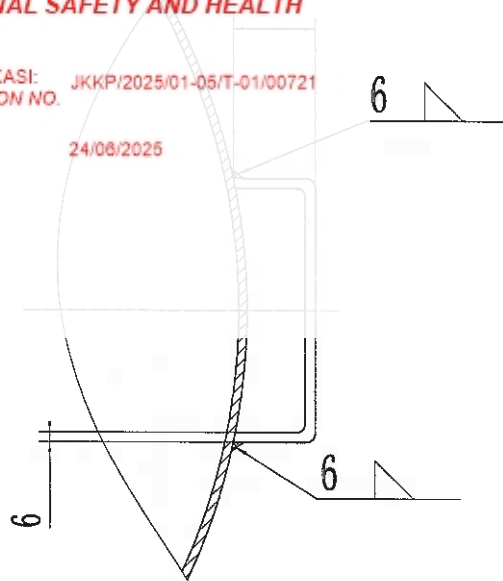

A

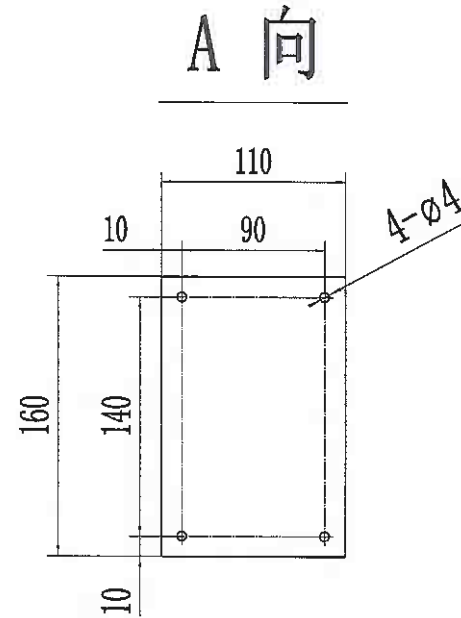

注NOTES:

- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
All dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、材质: SA-516M Gr.485 Material: SA-516M Gr.485
- 3、所有角焊缝单面连续焊，其焊角高度按较薄板厚度。
All fillet weld joints are continuous at single side with the height of the fillet weld shall equal to the thickness of thinner parts.

借 (通) 用
件 登 记

旧底图总号

底图总号

签 字

日 期

档案员 日 期

铭牌座NAMEPLATE SUPPORT

SA-516M Gr. 485

HKAT-01/REV. 1

设计Design

韩泰东

日期Date

2024.10.8

批准Approved

韩泰东

日期Date

2024.10.8

青岛海空信合工程有限公司

QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.