
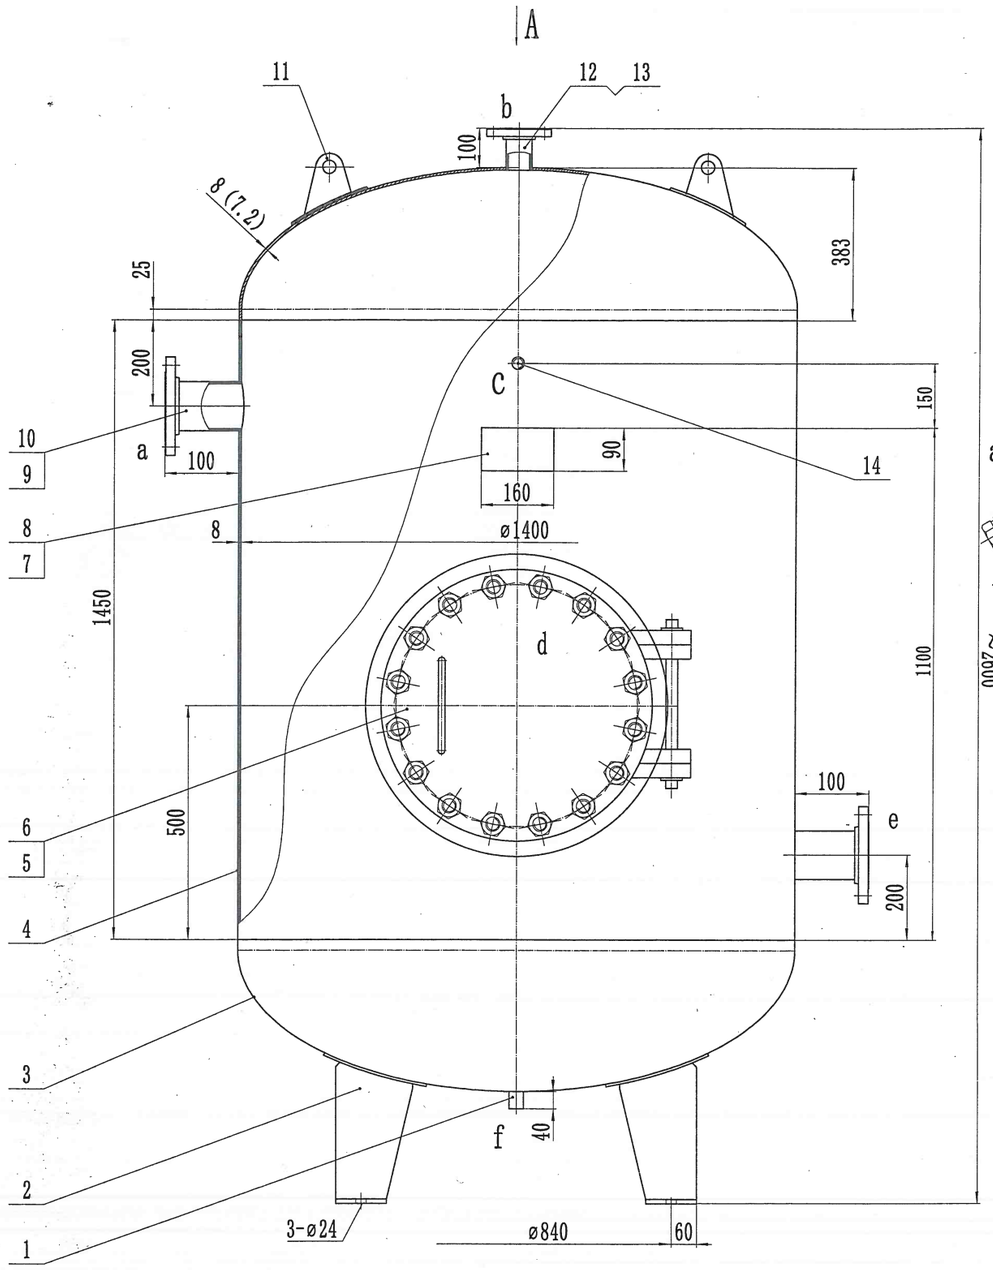


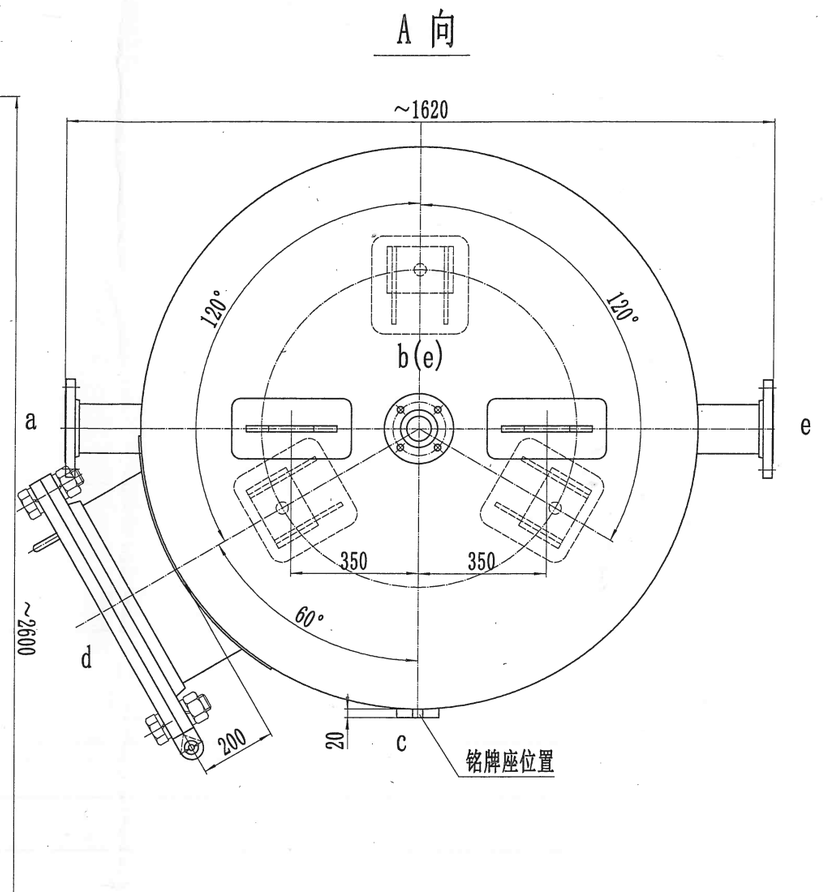

技术特性表 TECHNICAL FEATURES

设计压力DESIGN PRESS. MPa			100
最大允许工作压力MAWP MPa			0
操作压力OPERATING PRESS. MP			80
水压试验压力HYDR. TEST PRES	MPa		压缩空气COMPRESSED AIR
气压试验压力PNEU. TEST PRES	MPa		3
腐蚀裕量 CORR. ALLOW. mm			~990
焊接接头系数JOINT EFFICIENC			~3900
保温层INSUL 材料MATERIAL / 厚度THICKNESS			根据要求RADIOGRAPHY 局部SPOT FOR UW-52
规格钢印CERTIFICATION MARK	ASME U		按图纸 AS PER
介质特性MEDIUM NATURE	非致死NON-LETHAL		压缩空气
水压试压低应用温度MIN. HYDR TEST MPA	MIN. ℃	5	冲击 IMPACT
消除应力热处理PWHT		不要NO	
表面清理等级CLEANING CLASS	按喷砂标准SPECIFICATION NO.)		油漆PAINT
设计规范DESIGN CODE	ASME CODE SECTION VIII DIV.1 2023 EDITION		

技术要求TECHNICAL SPECIFICATION

1. 所有受压部件的对接焊缝应采用全熔透焊缝，并应采用焊接工艺规程(WPS)施焊；
 All butt welds of pressure parts shall be full penetration welding using the applicable WPS specified in Joint Identification Chart(JIC).
2. 管口、支座和铭牌的方位按本图；
 The orientation for the nozzle , support and name plate shall be per this drawing.
3. 除图中注明外，角焊缝的焊脚高度按所连接件中较薄者的厚度，图中注明的焊脚高度为最小值。
 The leg of fillet weld shall equal to the thickness of thinner parts except otherwise specified in drawing.The leg size on this drawing is the minimum value.
4. 压力试验合格后，内表面应干净并涂两遍车间底漆，除锈等级达到SA2.5级，合格后涂防锈漆两遍，面漆各一遍；
 The internal surface of the tank should be cleaned after hydrostatic test.Coat Antirust Primer and finish paint one time afer passing test.The grade of rust cleaning reached SA2.5.
5. 除另外注明外，本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
 Unless otherwise specified,all dimensions are in millimeters,the fabrication tolerance shall conform to the grade C level of GB/T19804-2005.
6. 法兰螺栓孔跨中心布置。
 The flange bolt holes shall straddle equipment centre line and be equal spaced.

管 口 表LIST OF NOZZLE


代号SYMBOL	数量QTY	法兰标准FLANGE STD.	公称尺寸SIZE	级别CLASS	密封面SEALING	类型TYPE	接管NOZZLE	用途SERVICE
a	1	ASME B16.5-2013	DN100	150#	RF	SO	ø114.3X8.56	出气口OUTLET
b	1	ASME B16.5-2013	DN50	150#	RF	SO	ø60.3X8.74	安全阀口 Safety valve
c	1		M20×1.5				ø35X7.5	压力表口 Pressure gauge
d	1	ASME B16.5-2013	DN450	150#	RF	SO	ø457X8	检修孔 Access Opening
e	1	ASME B16.5-2013	DN100	150#	RF	SO	ø114.3X8.56	进气口INLET
f	1		$R\frac{3}{4}$				ø28X7	排污口DRAIN

JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH
Verifikasi Dokumen
Document Verification
NO. VERIFIKASI
VERIFICATION NO. JKKP/2025/01-057-01/00721
TARIKH:
DATE 24/06/2025


SGS WITNESSED□ REVIEWED□
AI Yufeng Zhang
AIA-065 NB17472
2024.10.9

14	HKA0286-08	压力表口NOZZLE FOR PRESSURE GAUGE M20×1.5	1	SA-105M		0.2	
13	ASME B36.10M	接管NOZZLE OD60.3X8.74	1	SA-106M Gr.B		1.4	L=120
12	ASME B16.5-2020	法兰FLANGE DN50 CL150 SO/RF	1	SA-105M		2.2	
11	HKA0286-07	吊耳LIFTING LUGS	2	SA-516M Gr.485	4.4	8.8	
10	ASME B36.10M	接管NOZZLE OD114.3X8.56	2	SA-106M Gr.B	1.6	3.2	L=120
9	ASME B16.5-2020	法兰FLANGE DN00 CL150 SO/RF	2	SA-105M	5.63	11.3	
8	HKAT-00	铭牌Nameplate	1	COMPONENT		1.0	
7	HKAT-01	铭牌座NAMEPLATE SUPPORT	1	SA-516M Gr.485		1.0	
6	HKA0286-06	补强圈REINFORCEMENT PAD ΦW750X6	1	SA-516M Gr.485		13.1	
5	HKA0286-05	人孔MAN HOLE	1	COMPONENT		225.05	
4	HKA0286-04	筒体SHELL ID1400 δ=8	1	SA-516M Gr.485		402.8	L=1450
3	HKA0286-03	2:1椭圆封头ELLIPSOIDAL HEAD ID1400X8(2:1)	2	SA-516M Gr.485	137.7	275.4	
2	HKA0286-02	支承式支座BRACKET SUPPORT	3	COMPONENT	13.5	40.5	
1	HKA0286-01	排污口Drain outlet $R\frac{3}{4}$	1	SA-105M		0.4	
序号	图号或标准号	名称及规格	数量	材料	单件 重(Kg)	总计 重	备注


NAME PLATE SUPPORT TO SHELL WELDING DETAIL
铭牌座与筒体的焊缝详图
NO SCALE




SHELL TO SHELL AND HEAD WELDING DETAIL
筒体与筒体和封头的焊缝详图
NO SCALE




NOZZLE a,b, c, e, f TO SHELL AND HEAD WELDING DETAIL
接管a,b,c, e,f与壳体和封头的焊接详图
NO SCALE




NOZZLE d AND REINFORCEMENT PAD TO SHELL WELDING DETAIL
接管d与补强圈与壳体的焊接详图
NO SCALE




NOZZLE b TO FLANGE WELDING DETAIL
接管b与法兰的焊缝详图
NO SCALE



NOZZLE a e TO FLANGE WELDING DETAIL
接管a e 与法兰的焊缝详图
NO SCALE



NOZZLE d TO FLANGE WELDING DETAIL
接管d与法兰的焊缝详图
NO SCALE



压缩空气储罐 COMPRESSED AIR TANK		ID1400×2600	HKA0286/REV.0
设计Design	日期Date 2024.10.8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.	
批准Approved	日期Date 2024.10.8		

借(通)用件登记
旧底图总号
底图总号
签字
日期
档案员 日期