




JABATAN KESELAMATAN DAN KESEHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00922
TARIKH:
DATE 05/08/2025

Verifikasi Dokumen
Document Verification

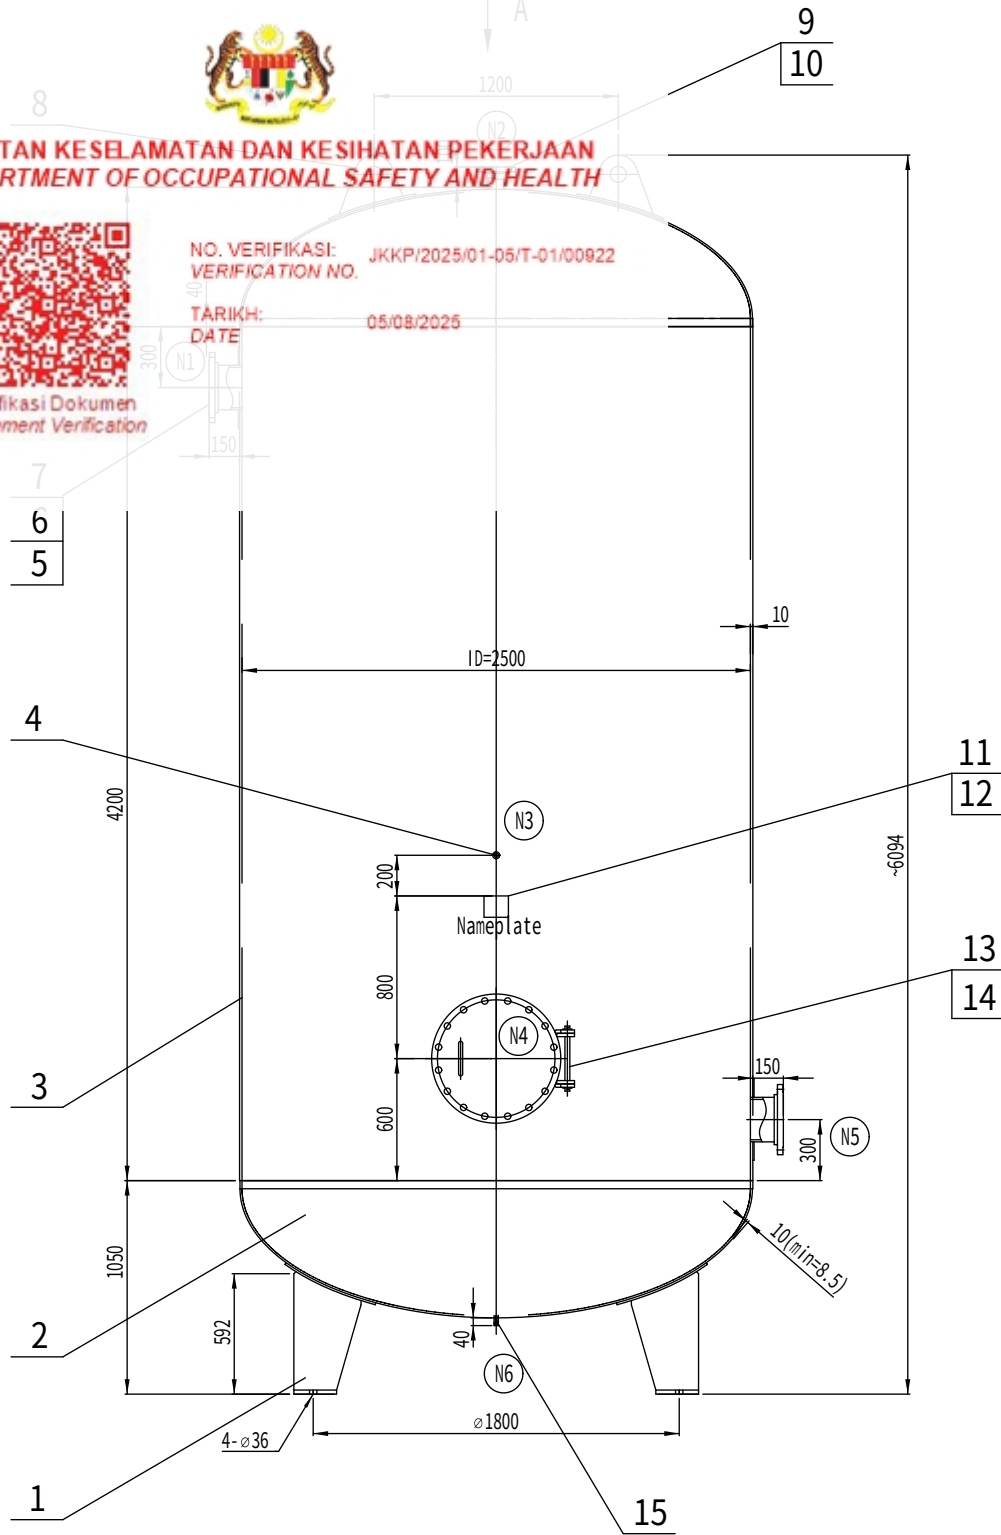

NOTES:


- Dimension tolerance of the receiver shall meet the requirement of "Dimension Tolerances of Pressure Vessel" (QCP-TK-08 Rev.0).
- The difference between the maximum and minimum inside diameters of shell shall not exceed 26mm. The maximum offset of longitudinal and circumferential welds shall not be greater than 2.5mm. Reinforcement of longitudinal weld shall not greater than 2.5mm and 4mm for circumferential weld.
- Unmentioned fillet weld sizes are 0.7*emin where emin refers to the item with minimum thickness.
- Flange bolt holes to straddle normal centerlines.
- Drain port N1 to be flush with the inner surface of head.
- Exposed inside edges shall be chamfered or rounded.
- The nozzle orientation is subject to the top view.

注:

- 容器的尺寸公差需满足《压力容器尺寸公差规定》(QCP-TK-08 Rev.0)的要求。
- 筒体最大及最小内径之差不得超过26mm。纵缝和环缝的错变量不得大于2.5mm。纵焊缝余高不得大于2.5mm, 环焊缝余高不得大于4mm。
- 未注角焊缝尺寸为相焊件较薄者的0.7倍。
- 法兰螺栓孔均跨中分布。
- 排污口N6需打磨至与封头内表面齐平。
- 内部裸露的边缘应倒角或倒圆。
- 管口方位以俯视图为准。

法兰焊脚高尺寸表 TABLE A

Nozzle 管口	Pipe thk. 接管壁厚tn	Fillet size 角焊缝尺寸h
N1,N5	8.18	11.5
N2	7.62	9.6
N4	10	14

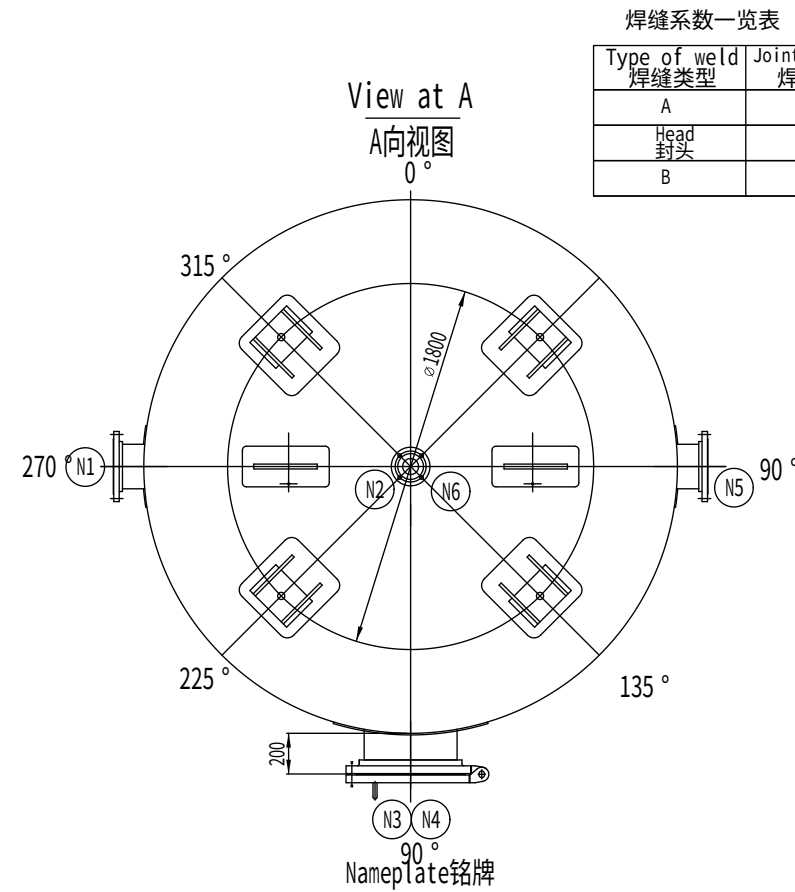


焊缝系数一览表 TABLE E

Type of weld 焊缝类型	Joint efficiency 焊缝系数E
A	1.0
Head 封头	1.0
B	1.0


Longitudinal, Circumferential welds

纵环焊缝焊接视图

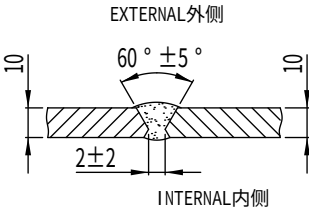


Welding detail for nozzles
without reinforcement

无补强圈接管焊接视图




Welding detail for nozzle
N6

接管N6焊接视图

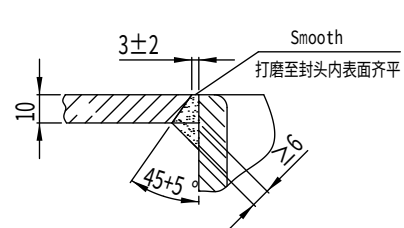


Welding detail for nozzle
with reinforcement N4

有补强圈接管焊接视图 N4

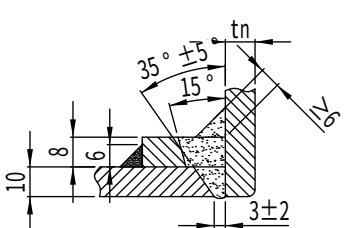


Welding detail for flange
to pipe

法兰与接管焊接视图

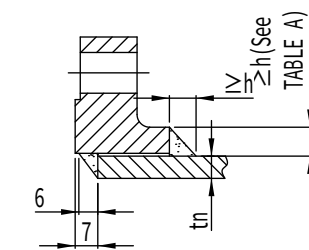

Welding detail for nozzle
with reinforcement N1, N5

有补强圈接管焊接视图 N1、N5

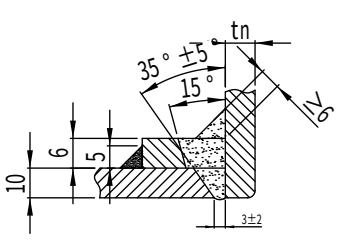

技术条件及数据 TECHNICAL SPECIFICATION & DATA

规范CODE:ASME SECT.VIII DIV.1 2023 EDITION

ASME Certification Mark with "U" designator

NO

NB Registration NB注册

NO

操作 Operating	Pressure MPa	0.8	设计 Design	Pressure MPa	0.84
	Temperature °C	80		Temperature °C	100

最低设计金属温度 Minimum design metal temperature(MDMT) at MAWP	-29°C at 0.84 MPa	最高允许工作压力 (MAWP)	0.84 MPa at 100 °C
---	-------------------	--------------------	--------------------

腐蚀裕量 Corrosion allowance	mm	0	液压试验压力 Hydrostatic test pressure	1.1 MPa at 5~48 °C
-----------------------------	----	---	--	-----------------------

焊接接头系数E Joint efficiency,welding E	See Table E	介质名称及性质 Medium/Nature	空气/非致死 Air/Non-lethal
---------------------------------------	----------------	--------------------------	--------------------------

全容积 Gross volume	m3	25.0	特殊工况 Special service	无 No
---------------------	----	------	-------------------------	---------

设备空重 Empty weight	kg	4250	焊后热处理 PWHT	豁免Exemption Table UHA-32-3 Note (a)
----------------------	----	------	---------------	--

焊接方法 Welding Process	See welding map	冲击试验 Impact test	豁免 Exemption UHA-51
-------------------------	-----------------------	---------------------	------------------------

无损检测要求 NDE requirement	Full RT as per UW-51			
---------------------------	----------------------	--	--	--

油漆要求 Painting requirement	见合同 See Order	设计使用寿命 Design life	10年 10 Years
------------------------------	------------------	-----------------------	-----------------

管口表 TABLE OF NOZZLE

MARK 符号	RATING 等级	STANDARD 标准	SIZE 规格	SERVICE 用途	EXTEND LENGTH 外伸长度	INTO LENGTH 内伸长度
N1	Class 150	ASME B16.5-2020	SO 200-150 RF	Air outlet 出口	See Fig. 见图	/
N2	Class 150	ASME B16.5-2020	SO 80-150 RF	Safety valve port 安全阀口	See Fig. 见图	/
N3	/	/	M20×1.5	Pressure gauge 压力表口	30	/
N4	Class 150	ASME B16.5-2020	SO 450-150 RF	Manhole 人孔	See Fig. 见图	/
N5	Class 150	ASME B16.5-2020	SO 200-150 RF	Air inlet 进气口	See Fig. 见图	/
N6	/	/	R 3/4"	Drain 排污口	40	0



14	TK24325-05	A	Reinforced pad补强圈(DN450)	1	SA-240M 304		16.9	
13	TK24326-01	A	Manhole 人孔	1	Assembly组合件		183.6	Borrow 借用
12	TK24325-04	A	Nameplate 铭牌	1	S30408(GB24511)		0.5	
11	TKTY06-09	C	Nameplate support(Vertical)铭牌支架(立式)	1	SA-240M 304		0.5	H=25
10		/	Pipe接管φ88.9*7.62,L=103	2	SA-312M TP304	1.6	3.2	
9	ASME B16.5-2020	/	Flange法兰SO 80-150 RF	1	SA-182M F304		4.0	
8	TK24325-03	A	Lifting lug 吊耳	2	SA-240M 304	8.4	16.8	
7		/	Pipe接管φ219.1*8.18,L=160	2	SA-312M TP304	8.9	17.8	
6	ASME B16.5-2020	/	Flange法兰SO 200-150 RF	2	SA-182M F304	12.9	25.8	
5	TK24325-06	A	Reinforced pad补强圈(DN200)	1	SA-240M 304		4.1	
4	TKTY03-01	B	Pressure gauge joint压力表接头M20×1.5	1	SA-182M F304		0.4	
3		/	Shell筒体ID=2500,T=10,L=4200	1	SA-240M 304		2626.3	
2	TK24325-02	A	2:1 ellipsoidal head椭圆封头	2	SA-240M 304	544.4	1088.8	
1	TK24325-01	A	Support 支座	4	SA-240M 304	63.5	254	

序号 No.	图号 DWG NO.	版本号 Rev No.	名称 Name	数量 QTY.	材料 Material	单件 Single	总计 total	备注 Remark
						重量 Weight	Kg	
					Air receiver 储气罐 (C-25.0/0.8)	浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.		
版本 Rev.	注释Comment		签名 Signature	日期Date				
Design by		Date		重量 Weight	4250kg	比例 Scale	1:12	Customer:
Approved by		Date		Drawing NO.: TK24325 Rev.A				

15	TKTY02-02	C	Screwed joint(R)外螺纹接头 R 3/4"	1	SA-182M F304		0.2	
----	-----------	---	------------------------------	---	--------------	--	-----	--



Vessel centerline 容器中心线

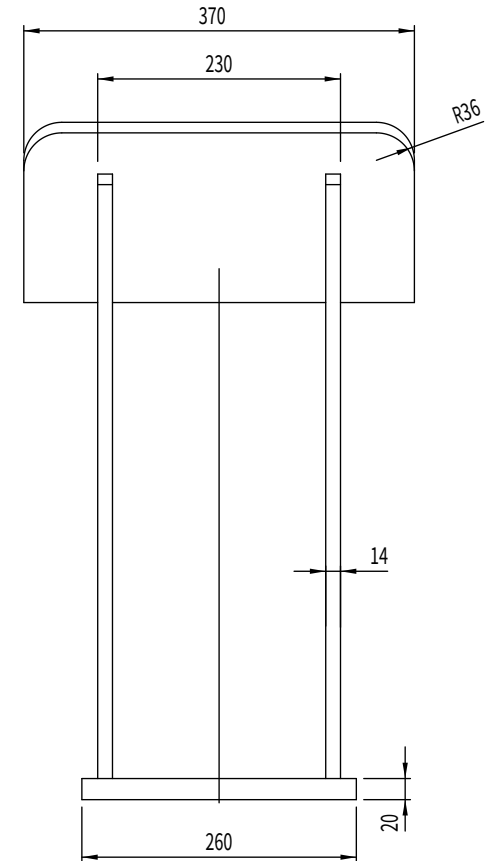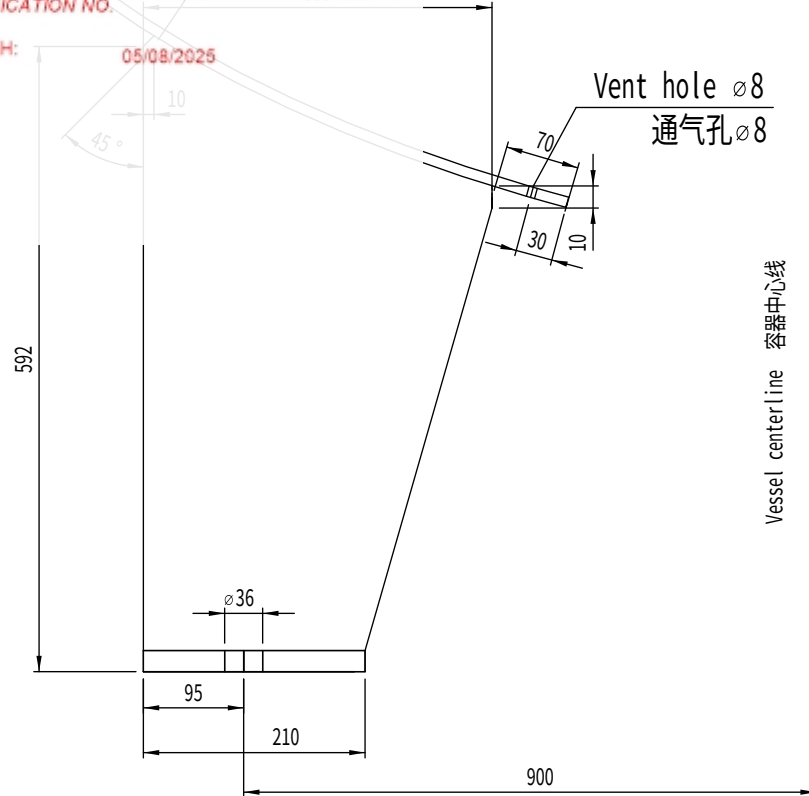

支座组焊完毕后，各部件应平整，不得翘曲。

				Support 支座				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.			
								重量 Weight 15.8kg 比例 Scale 1:10		Drawing NO.: TK24325-01 Rev.A	
Rev.	Comment	Signature	Date								
Design by		Date									
Approved by		Date									





JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH

others



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00922
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

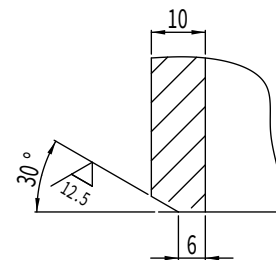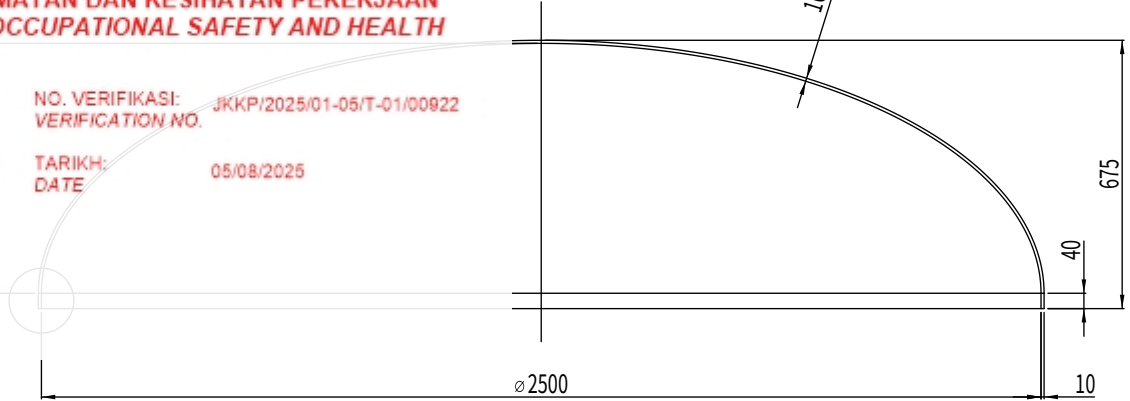

Detail I (详图 I)

NOTES:

- Code 规范: ASME VIII-1, 2023 ED, No stamp;
- MAWP 最高允许工作压力: 0.84 MPa at 100°C;
- MDMT 最低金属设计温度: -29°C at 0.84 MPa;
- Corrosion allowance 腐蚀裕量: 0 mm;
- Material 材料: SA-240M 304 (Solution) (固溶);
- NDE: Full RT as per UW-51; 无损检测: 100% RT;
- Impact test: Exemption (UHA-51); 冲击试验: 豁免 (UHA-51);
- Heat treatment after forming: Exemption (UHA-32). 成形后热处理: 豁免 (UHA-32);
- The minimum thickness of ellipsoidal head after forming shall be 8.5 mm.
封头成型后最小厚度为 8.5 mm.
- As per UG-81, the inner surface of a ellipsoidal head shall not deviate outside of the specified shape by more than 1.25%D nor inside the specified shape by more than 5/8% of D. The skirts of heads shall be sufficiently true to round so that the difference between the maximum and minimum inside diameters shall not exceed 1% of the nominal diameter.
根据 UG-81, 椭圆形封头的内表面与规定形状 (样板) 的向外偏差不得大于 1.25%D (31.2 mm), 且与规定形状的向内偏差不得大于 5/8%D (15.6 mm)。封头的直边应该有足够的圆度, 使最大及最小内径之差不得超过公称直径的 1%。
- Other size requirement refer to GB/T25198-2023.
其他尺寸要求参照 GB/T25198-2023。
- The head groove of each vessel shall be according to Detail I. 每台容器的封头坡口按照详图 I。

				2:1 ellipsoidal head 2:1椭圆封头				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释 Comment		签名 Signature					日期Date	
Design by			Date		重量 Weight	544.4kg	比例 Scale	1:25	Customer:
Approved by			Date		Drawing NO.: TK24325-02 Rev.A				





JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00022

TARIKH:
DATE 05/08/2025

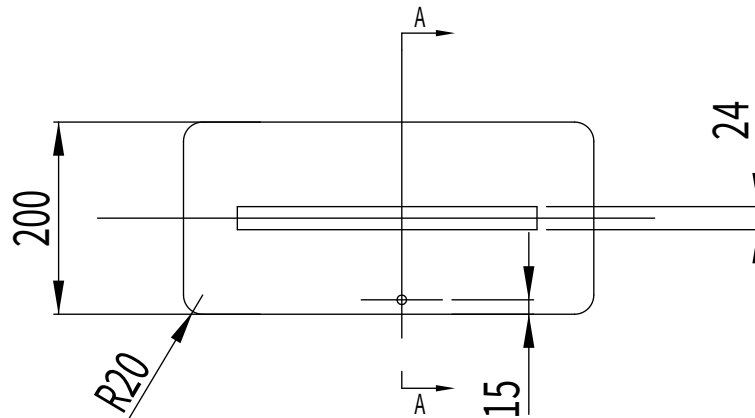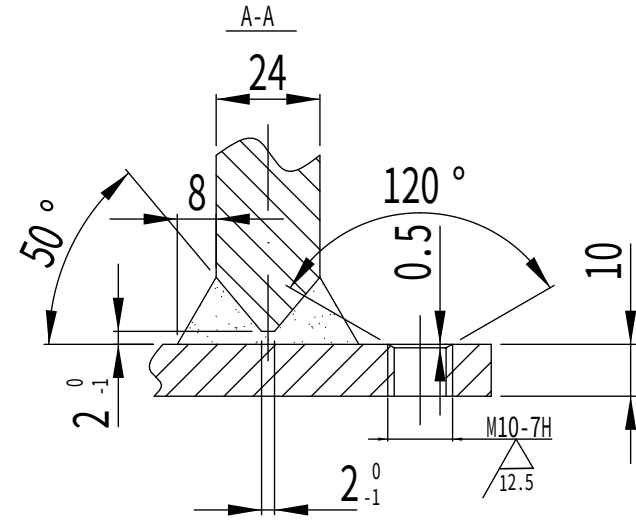

NOTES:

- 1.Backing material:SA-240M 304.Lug material:SA-240M 304.
垫板材料:SA-240M 304。吊耳材料:SA-240M 304。
- 2.The backing plate shall fit the outer wall of the vessel.
垫板应与容器外壁贴合。
- 3.After the assembly and welding of the lug, all parts shall be flat without warping.
吊耳组焊完毕后,各部件应平整,不得翘曲。

				Lifting lug 吊耳				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date						
Design by		Date		重量 Weight	4.0kg	比例 Scale	1:10	Customer:	
Approved by		Date		Drawing NO.: TK24325-03 Rev.A					

JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00922
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

EQUIPMENT NAME: Air receiver
PRODUCT NO.: TK24325-XXX
TEST DATE: XXXX/XX/XX
VOLUME(V) (m3): 25
WEIGHT(Kg): 4250
YEAR BUILT: XXXX
DESIGN PRESSURE (PS)(MPa): 0.84
MIN/MAX ALLOWABLE TEMPERATURE (TS)(°C): -29/100
HYDRO.TEST PRESSURE (PT)(MPa): 1.1

Zhejiang Tank Pressure Vessel Co., Ltd.
No. 6, Chunyuan West Road, Qzhou City, Zhejiang Province, China
CODE: ASME SECT.VIII DIV.1 2023 EDITION

NOTES:

- 1. Material 材料: S30408(GB/T24511-2017) ;
- 2. One piece for each vessel. 每台1件.
- 3. The required markings on a nameplate shall be in characters not less than 5/32 in.(4mm) high, and characters shall be either indented or raised at least 0.004 in.(0.10mm) and shall be legible and readable. 铭牌上所需的各种标志, 可采用高度不小于 5/32 in.(4mm) 的字符来标志, 标志字符应凹进或凸起至0.004 in.(0.10mm), 并且明显易读.

				Nameplate 铭牌				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.				
								重量 Weight		0.5Kg	比例 Scale	1:1
版本 Rev.	注释 Comment		签名 Signature									
Design by			Date						Customer:			
Approved by			Date		Drawing NO.: TK24325-04 Rev.A							

15	TK24326-01-06	Handle 把手 $\varnothing 20$	1	SA-182M F304		0.7	
14	GB/T91-2000	Pin 销 6.3×30	2	304	/	/	
13	TK24326-01-05	Cover lug 盖轴耳II	1	SA-240M 304		0.7	
12	TK24326-01-04	Flange lug 法兰轴耳II	1	SA-240M 304		0.6	
11	TK24326-01-03	Flange lug 法兰轴耳I	1	SA-240M 304		0.6	
10	TK24326-01-02	Cover lug 盖轴耳I	1	SA-240M 304		0.7	
9	GB/T95-2002	Plain Washer 平垫圈 24	2	304	/	/	
8	TK24326-01-01	Shaft pin 轴销	1	304		1.3	
7	ASME B18.22.1	Plain Washer 平垫圈 NPS 1-1/8	16	304	0.05	0.8	Latest edition
6	ASME B18.2.2	Nut 螺母 1-1/8-8UN-2B	16	SA-194M-8	0.09	1.44	Latest edition
5	ASME B18.2.1	Bolt 螺栓 1-1/8-8UN-2A,L=135	16	SA-193M B8 CL1	0.18	2.88	Latest edition
4		Gasket 垫片 $\varnothing 548 \times \varnothing 458, T=3$	1	Elastomers with cotton fabric insertion 含有棉纤维的橡胶		/	
3	ASME B16.5-2020	Blind 法兰盖 BL 450-150 RF	1	SA-240M 304		98.5	
2	ASME B16.5-2020	Flange 法兰 SO 450-150 RF	1	SA-182M F304		49.5	
1		Pipe 接管 $\varnothing 457 \times 10, L=233$	1	SA-240M 304		25.9	
序号 No.	标准号 Standard	名称 Name	数量 QTY.	材料 Material	单件 Single 重量 Weight	总计 total Kg	备注 Remark
				Manhole 人孔 (DN450)		浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date				
Design by		Date		重量 Weight	183.6kg	比例 Scale	1:10
Approved by		Date		Drawing NO.: TK24326-01 Rev. A		Customer:	






JABATAN KESELAMATAN DAN KESEHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00922
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

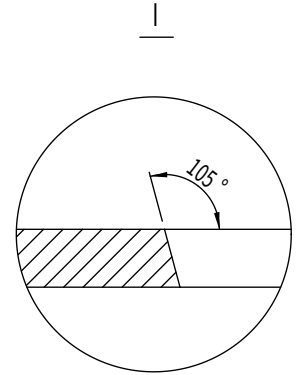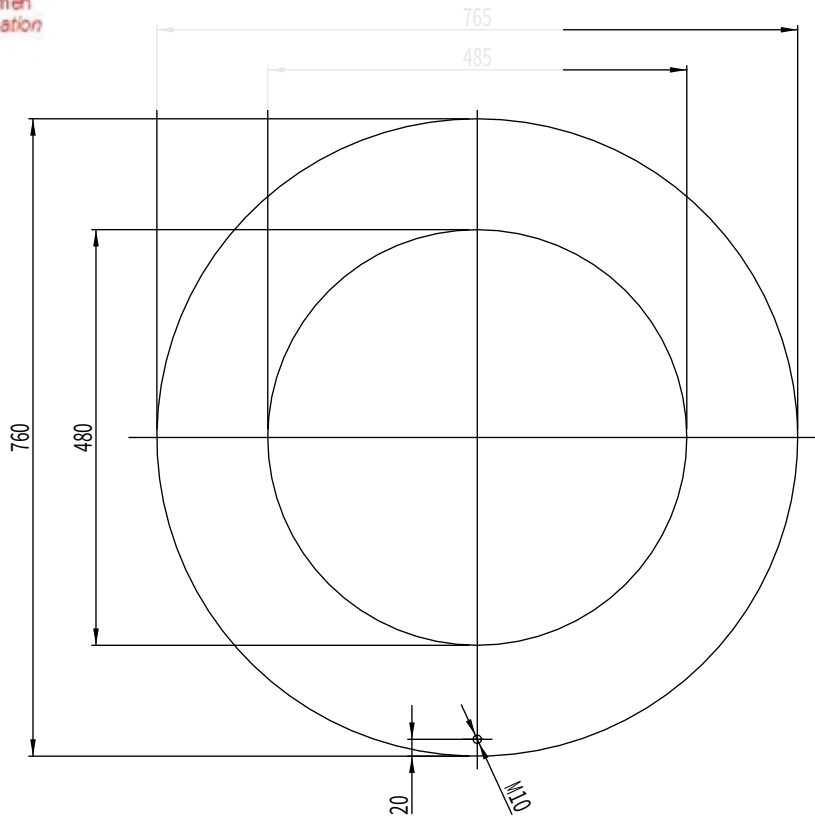

Developed pattern
展开图

Notes:

1. Material 材料: SA-240M 304.

2. Splicing is not allowed unless the provisions given below are satisfied.

补强圈允许拼接, 但是要满足下列规定:

(1) Individual segments are joined by full penetration butt welds and shall be ground flush;
各个分块部分都由全焊透对接焊缝连接, 并且焊缝磨平;

(2) Each segment of the reinforcing element shall have a vent hole as required by UG-37(g).
每个分块都要按照UG-37(g)的要求具有一个信号孔。

(3) Each butt weld is radiographed or is oriented at least 45 deg from the longitudinal axis of the cylinder.

拼焊焊缝作射线检测或焊缝的布置由圆筒的纵轴起至少为45°。

				Reinforcement pad 补强圈 DN450				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释 Comment		签名 Signature					日期Date	
Design by			Date		重量 Weight	16.9kg	比例 Scale	1:1	Customer:
Approved by			Date		Drawing NO.: TK24325-05 Rev.A				






JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00922
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

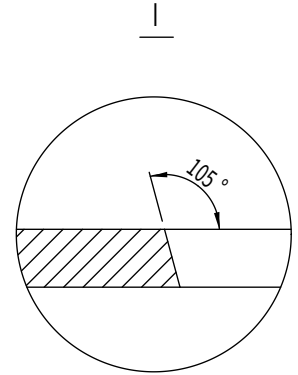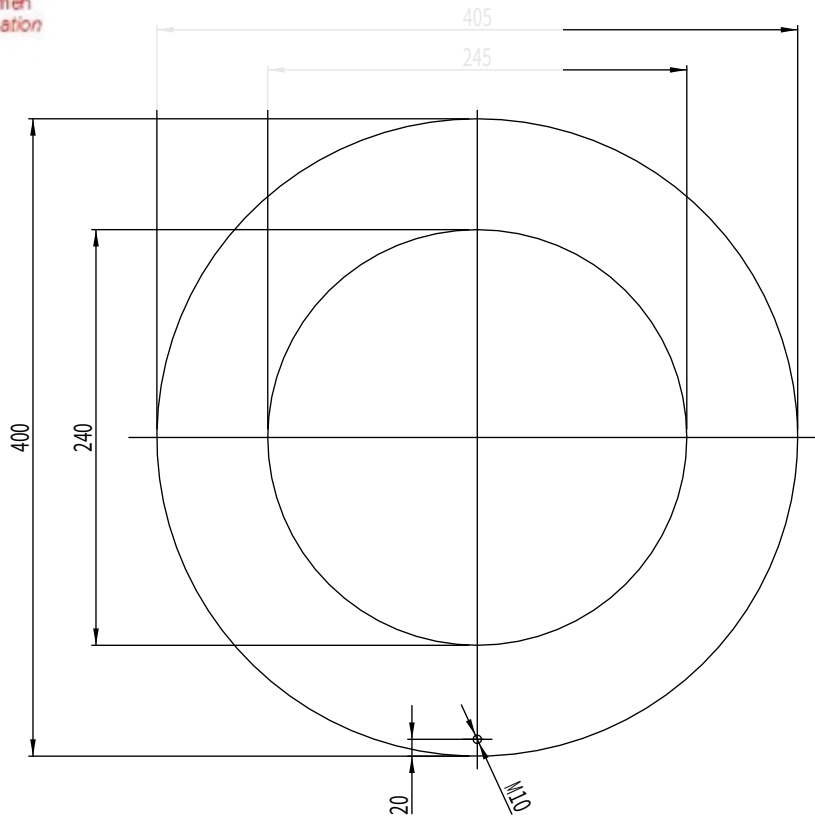

Developed pattern
展开图

Notes:

1. Material 材料: SA-240M 304.

2. Splicing is not allowed unless the provisions given below are satisfied.

补强圈允许拼接, 但是要满足下列规定:

(1) Individual segments are joined by full penetration butt welds and shall be ground flush;
各个分块部分都由全焊透对接焊缝连接, 并且焊缝磨平;

(2) Each segment of the reinforcing element shall have a vent hole as required by UG-37(g).
每个分块都要按照UG-37(g)的要求具有一个信号孔。

(3) Each butt weld is radiographed or is oriented at least 45 deg from the longitudinal axis of the cylinder.

拼焊焊缝作射线检测或焊缝的布置由圆筒的纵轴起至少为45°。

				Reinforcement pad 补强圈 DN200				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.			
版本 Rev.	注释 Comment		签名 Signature					日期Date			
Design by			Date		重量 Weight	4.1kg	比例 Scale	1:1	Customer:		
Approved by			Date		Drawing NO.: TK24325-06 Rev.A						




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00922
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

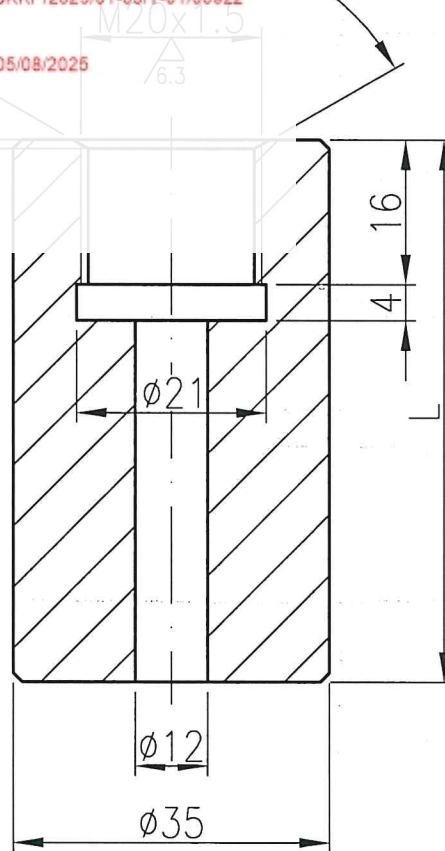

NOTES:

1. Material: See assembly dwg or purchase note.

材料: 见装配图明细表或采购订单。

2. Material marking should be in accordance with following requirements

(a) Manufacturer's Name or Trademark; (b) Drawing number; (c) Size; (d) Material specification and designation; (e) Heat number;

材料标记需满足以下要求:

(a) 制造厂的名称或商标; (b) 图号; (c) 规格; (d) 材料标准号和牌号; (e) 炉号;

3. Unless noted, otherwise processing surface tolerance shall be as per GB/T1804-2000 Grade m;

除注明外, 未注公差按GB/T1804-2000的m级;

4. End edges shall be chamfered or rounded.

端部边缘应倒角或圆角。

5. Undeclared chamfer is 1X45° ;

未注倒角为1X45° 。



others: 12.5/

02	80	0.6	
01	50	0.33	
XX	L (mm)	Weight重量(kg)	备注Remark

				Pressure gauge joint 压力表接头 (M20X1.5)				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd..	
Rev.	Comment		Signature	Date					
Design by	李明		Date	2022.8.23	重量 Weight	/	比例 Scale	/	
Approved by	吕明		Date	2022.8.23	Drawing NO.: TKTY03-XX Rev. B				Customer:




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00922

TARIKH:
DATE 05/08/2025

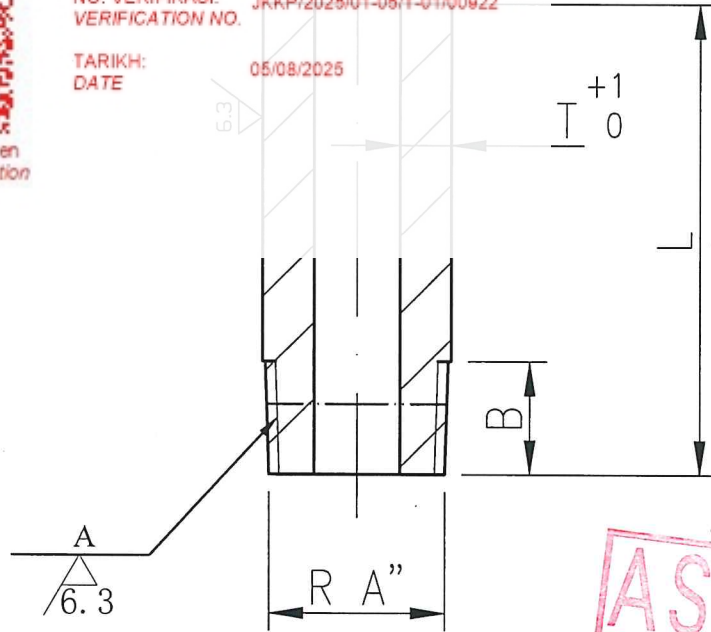

ASME

NOTES:

1. Material: See assembly dwg or purchase note.

材料：见装配图明细表或采购订单。

2. Material marking should be in accordance with following requirements

(a) Manufacturer's Name or Trademark; (b) Drawing number; (c) Size; (d) Material specification and designation; (e) Heat number;

材料标记需满足以下要求：

(a) 制造厂的名称或商标；(b) 图号；(c) 规格；(d) 材料标准号和牌号；(e) 炉号；
3. Unless noted, otherwise processing surface tolerance shall be as per GB/T1804-2000 Grade m;

除注明外，未注公差按GB/T1804-2000的m级；

4. End edges shall be chamfered or rounded.
端部边缘应倒角或圆角。

5. Undeclared chamfer is 1X45° ;
未注倒角为1X45° 。

others: 6.3/

16	3"	33.3	9.5	89	80	1.02	
15	2-1/2"	30.2	8	76		0.74	
14	2"	25.7	9.15	60.3		0.58	
13	1-1/2"	21.4	8.15	48.3		0.40	
12	1-1/4"	21.4	6.1	42.2		0.24	
11	1"	19.1	6.7	33.4		0.37	
10	3/4"	16.3	6.35	26.7		0.27	
09	1/2"	15	5.65	21.3		0.21	
08	3"	33.3	9.5	89	50	0.93	
07	2-1/2"	30.2	8	76		0.67	
06	2"	25.7	9.15	60.3		0.58	
05	1-1/2"	21.4	8.15	48.3		0.40	
04	1-1/4"	21.4	6.1	42.2		0.27	
03	1"	19.1	6.7	33.4		0.23	
02	3/4"	16.3	6.35	26.7		0.17	
01	1/2"	15	5.65	21.3		0.13	
XX	A	B (mm)	T (mm)	D (mm)	L (mm)	重量weight (kg)	备注Remark

				Screwed joint (R) 插入式Rp外螺纹接头			浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date					
Design by	田家欢	Date	2023.11.7	重量 Weight	/	比例 Scale	/	
Approved by	田家欢	Date	2023.11.7	Drawing NO. : TKTY02-XX Rev. C			Customer:	