




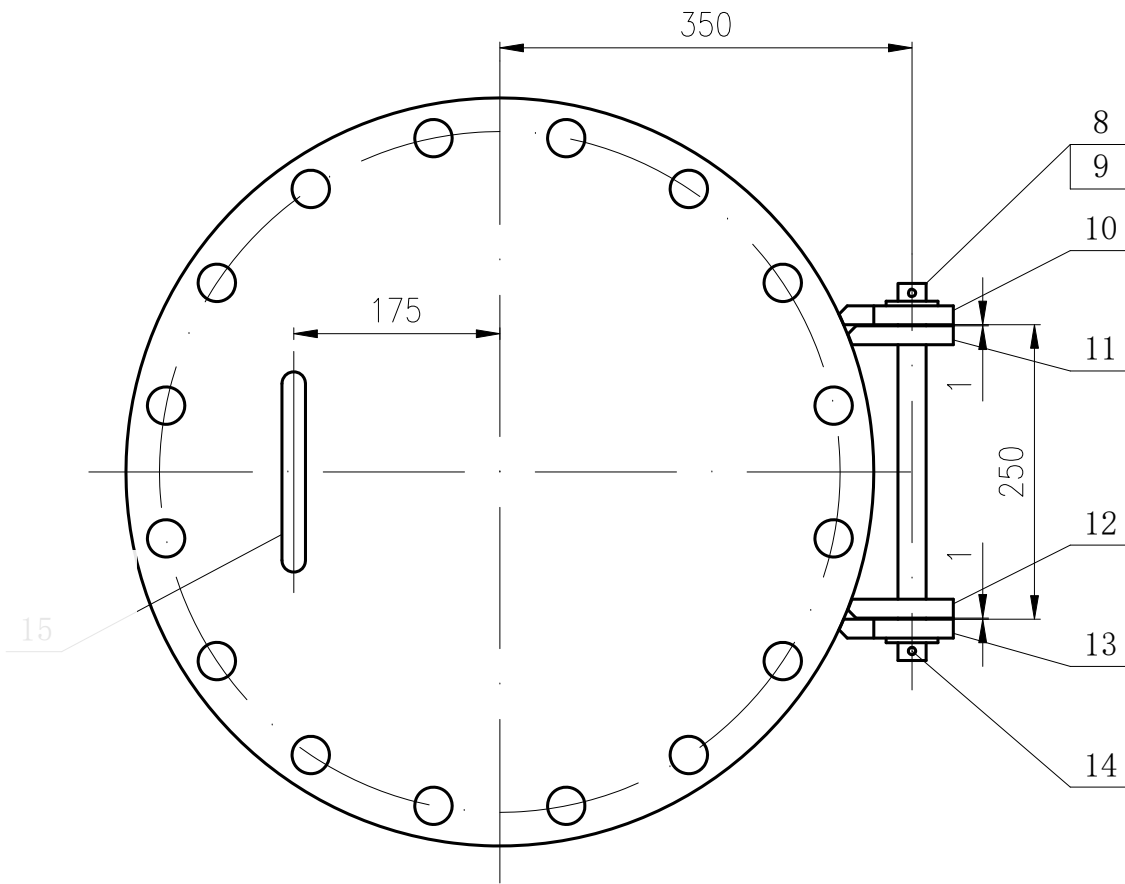

Verifikasi Dokumen
Document Verification

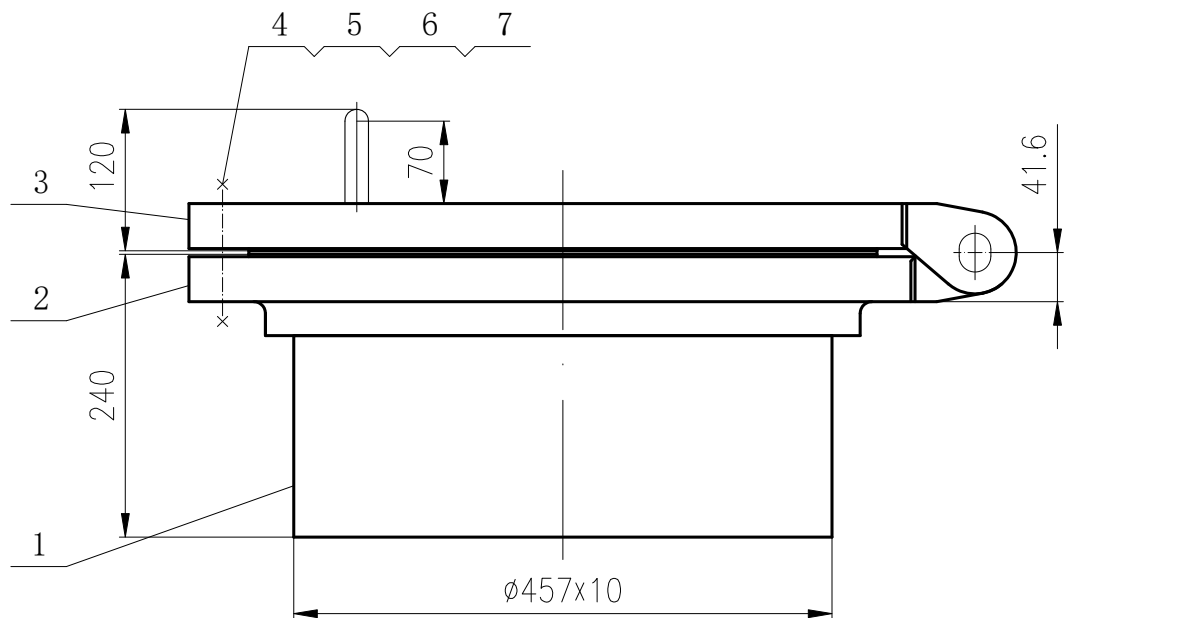

Welding detail for flange
to pipe
法兰与接管焊接视图

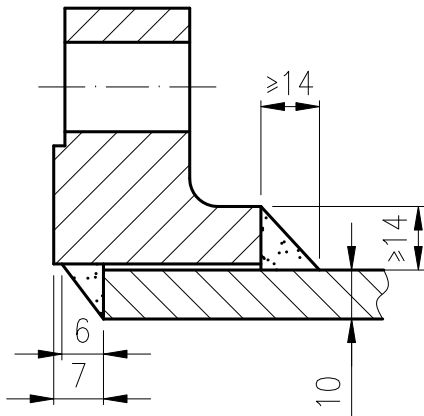

15	TK24326-01-06	Handle 把手 Ø20	1	SA-182M F304		0.7	
14	GB/T91-2000	Pin 销 6.3×30	2	304	/	/	
13	TK24326-01-05	Cover lug 盖轴耳 II	1	SA-240M 304		0.7	
12	TK24326-01-04	Flange lug 法兰轴耳 II	1	SA-240M 304		0.6	
11	TK24326-01-03	Flange lug 法兰轴耳 I	1	SA-240M 304		0.6	
10	TK24326-01-02	Cover lug 盖轴耳 I	1	SA-240M 304		0.7	
9	GB/T95-2002	Plain Washer 平垫圈 24	2	304	/	/	
8	TK24326-01-01	Shaft pin 轴销	1	304		1.3	
7	ASME B18.22.1	Plain Washer 平垫圈 NPS 1-1/8	16	304	0.05	0.8	Latest edition
6	ASME B18.2.2	Nut 螺母 1-1/8-8UN-2B	16	SA-194M-8	0.09	1.44	Latest edition
5	ASME B18.2.1	Bolt 螺栓 1-1/8-8UN-2A, L=135	16	SA-193M B8 CL1	0.18	2.88	Latest edition
4		Gasket 垫片 Ø548×Ø458, T=3	1	Elastomers with cotton fabric insertion 含有棉纤维的橡胶		/	
3	ASME B16.5-2020	Blind 法兰盖 BL 450-150 RF	1	SA-240M 304		98.5	
2	ASME B16.5-2020	Flange 法兰 SO 450-150 RF	1	SA-182M F304		49.5	
1		Pipe 接管 Ø457×10, L=233	1	SA-240M 304		25.9	
序号 No.	标准号 Standard	名称 Name	数量 QTY.	材料 Material	单件 Single 重量 Weight	总计 total Kg	备注 Remark
				Manhole 人孔 (DN450)		浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date				
Design by		Date		重量 Weight	183.6kg	比例 Scale	1:10
Approved by		Date		Drawing NO.: TK24326-01 Rev. A		Customer:	



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00918
VERIFICATION NO.
TARIKH: 05/08/2025
DATE



NOTES:

Backing material:SA-240M 304.Rib and base plate material:SA-240M.

垫板材料:SA-240M 304。筋板和底板材料: SA-240M 304。

The height of fillet welds is the same as the thinner plate.

角焊缝焊脚高度以较薄板为准。

The base plate shall fit the outer wall of the vessel.



底座应贴合器外壁贴合。

In the assembly and welding of the support, all parts shall be flat

平整。

After the support is welded, all parts should be flat, no bending.

底座组焊完毕后，各部件应平整，不得翘曲。

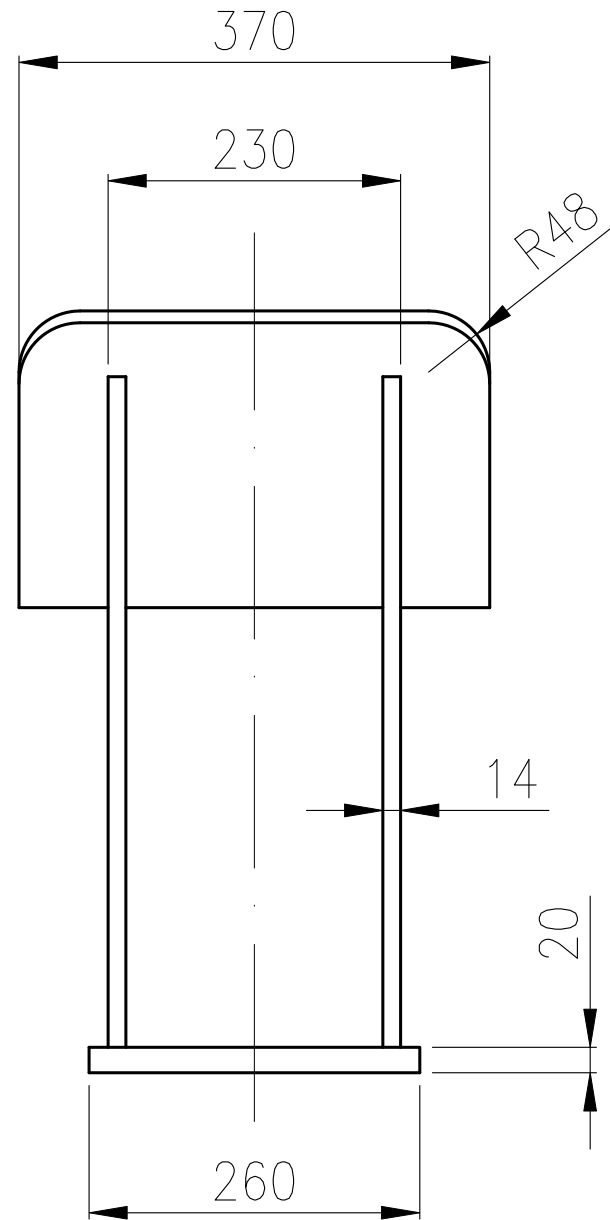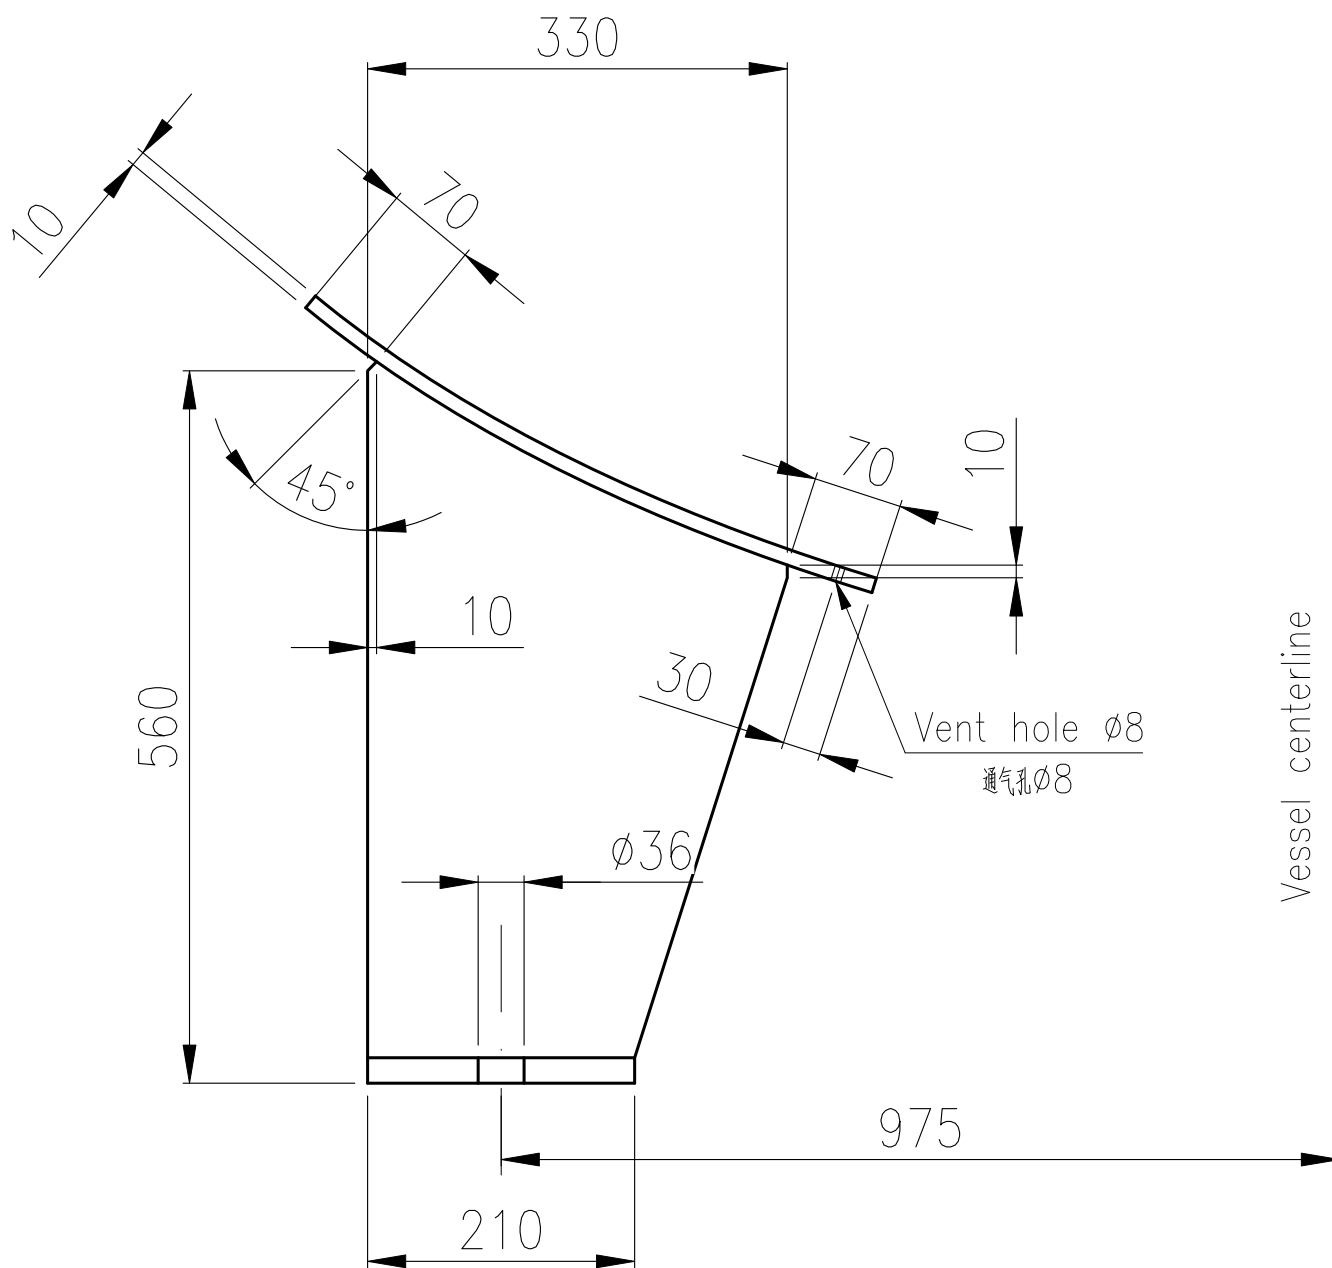

				Support 支座				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date						
Design by		Date		重量 Weight	67.2kg	比例 Scale	1:10		
Approved by		Date		Drawing NO. : TK24326-02 Rev. A					



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH





Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00918
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

others

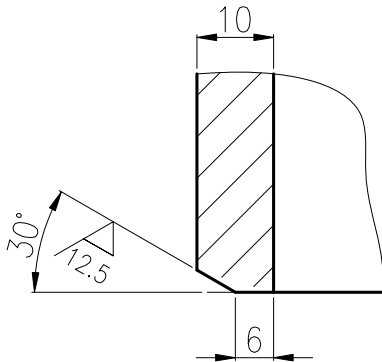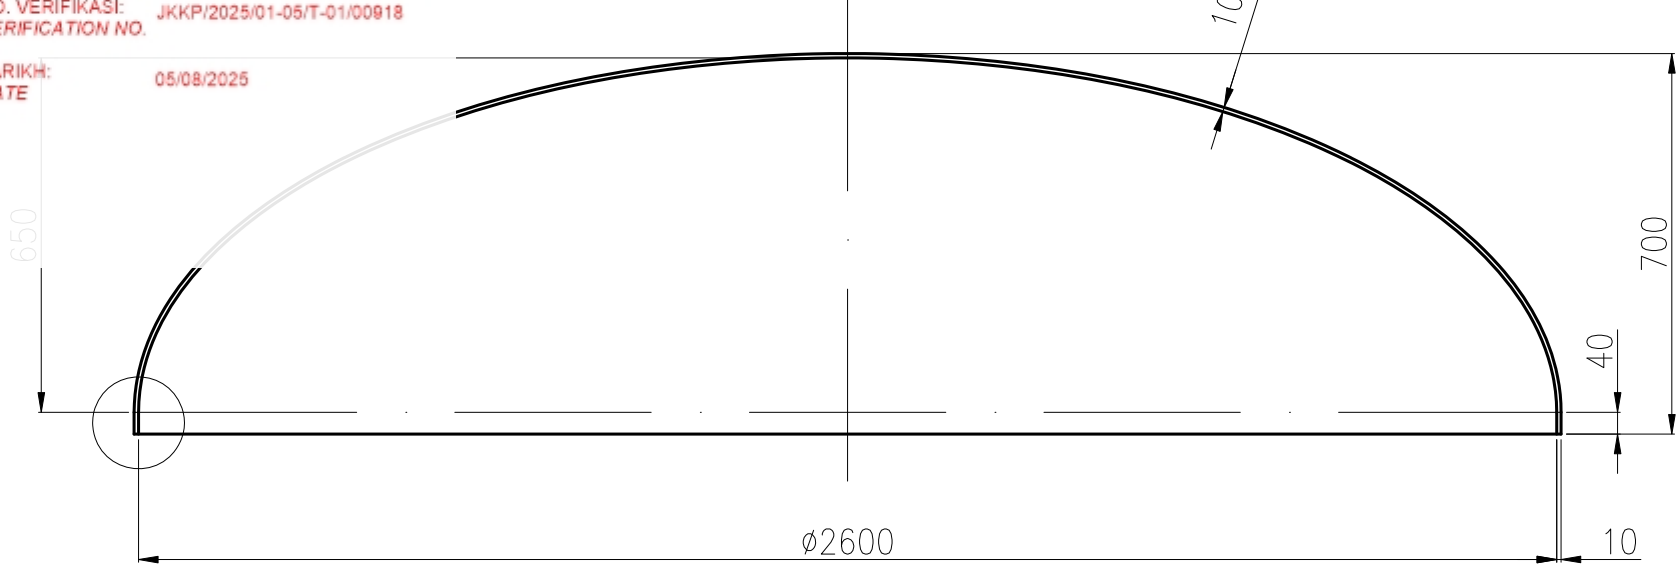

Detail I (详图 I)

NOTES:

- 1.Code 规范:ASME VIII-1,2023 ED, No stamp;
- 2.MAWP 最高允许工作压力:0.84 MPa at 100°C;
- 3.MDMT 最低金属设计温度:-29°C at 0.84 MPa;
- 4.Corrosion allowance 腐蚀裕量: 0 mm;
- 5.Material 材料:SA-240M 304(Solution) (固溶);
- 6.NDE:Full RT as per UW-51; 无损检测:100%RT;
- 7.Impact test:Exemption(UHA-51); 冲击试验:豁免(UHA-51);
- 8.Heat treatment after forming:Exemption(UHA-32). 成形后热处理:豁免(UHA-32);
- 9.The minimum thickness of ellipsoidal head after forming shall be 8.5 mm.

封头成型后最小厚度为8.5 mm.

- 10.As per UG-81,the inner surface of a ellipsoidal head shall not deviate outside of the specified shape by more than 1.25%D nor inside the specified shape by more than 5/8% of D.The skirts of heads shall be sufficiently true to round so that the difference between the maximum and minimum inside diameters shall not exceed 1% of the nominal diameter.

根据UG-81,椭圆形封头的内表面与规定形状(样板)的向外偏差不得大于1.25%D(32.5mm),且与规定形状的向内偏差不得大于5/8%D(16.25mm)。封头的直边应该有足够的圆度,使最大及最小内径之差不超过公称直径的1%。

- 11.Other size requirement refer to GB/T25198-2023.

其他尺寸要求参照GB/T25198-2023。

- 12.The head groove of each vessel shall be according to Detail I. 每台容器的封头坡口按照详图I。

				2:1 ellipsoidal head 2:1椭圆封头				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释Comment		签名 Signature						
Design by			Date		重量 Weight	586.6kg	比例 Scale	1:25	Customer:
Approved by			Date		Drawing NO. : TK24326-03 Rev. A				




JABATAN KESELAMATAN DAN KESEHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH





Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00918
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

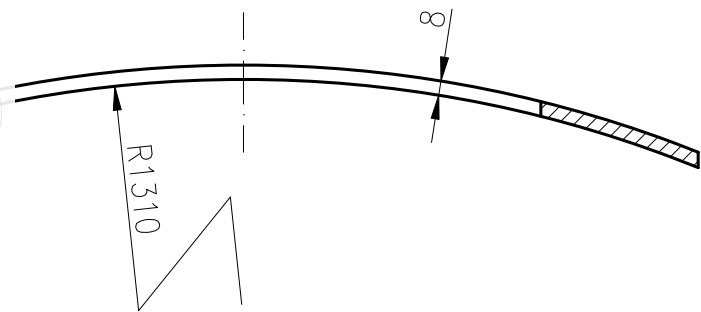

I

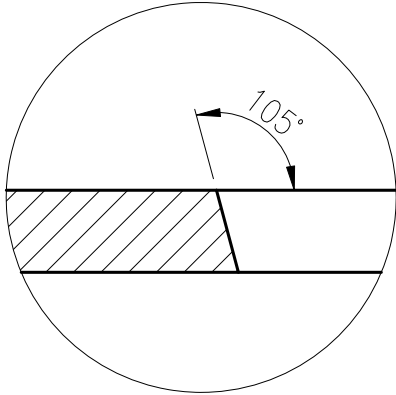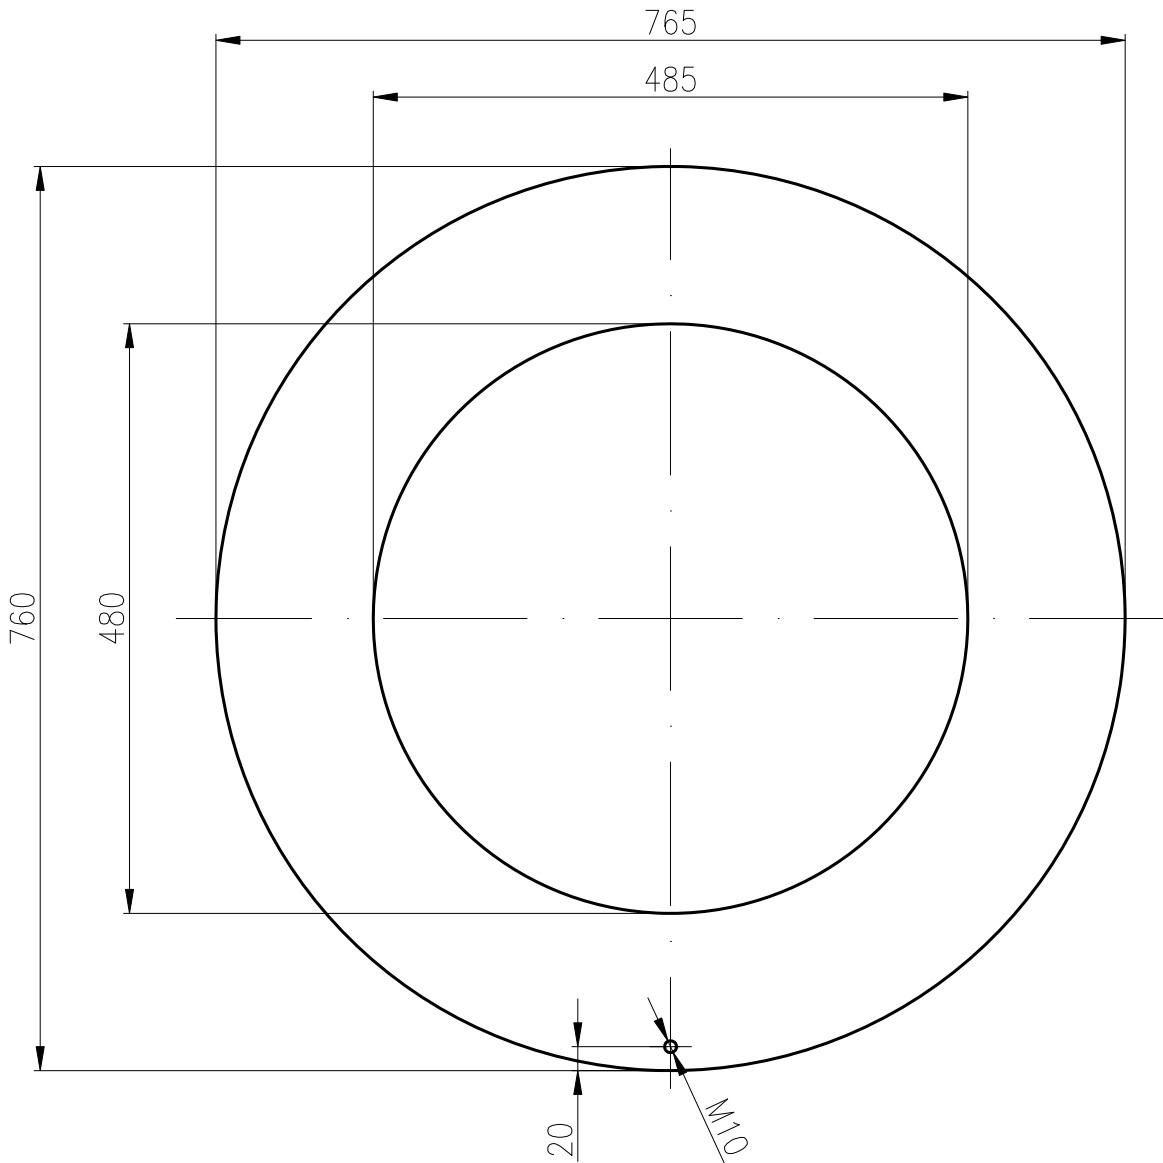

Developed pattern
展开图

Notes:

- Material材料:SA-240M 304.
- Splicing is not allowed unless the provisions given below are satisfied.
补强圈允许拼接，但是要满足下列规定：
 - Individual segments are joined by full penetration butt welds and shall be ground flush;
各个分块部分都由全焊透对接焊缝连接，并且焊缝磨平；
 - Each segment of the reinforcing element shall have a vent hole as required by UG-37(g).
每个分块都要按照UG-37(g)的要求具有一个信号孔。
 - Each butt weld is radiographed or is oriented at least 45 deg from the longitudinal axis of the cylinder.
拼焊焊缝作射线检测或焊缝的布置由圆筒的纵轴起至少为45°。

				Reinforcement pad 补强圈 DN450				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.			
版本 Rev.	注释 Comment		签名 Signature								
Design by			Date		重量 Weight	16.9kg	比例 Scale	1:1	Customer:		
Approved by			Date		Drawing NO. : TK24326-04 Rev. A						



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00918
VERIFICATION NO.
TARIKH: 05/08/2025
DATE



Zhejiang Tank Pressure Vessel Co., Ltd.
No. 6, Chunyuan West Road, Quzhou City, Zhejiang Province,
People's Republic of China

CODE: ASME SECT. VIII DIV. 1 2023 EDITION

105

3

EQUIPMENT NAME

Air receiver

VOLUME (V) (m³)

25

PRODUCT NO.

TK24326-XXX

WEIGHT (Kg)

4117

TEST DATE

XXXX/XX/XX

YEAR BUILT

XXXX

DESIGN PRESSURE (PS) (MPa)

0.84

MIN/MAX ALLOWABLE TEMPERATURE (TS) (°C)

-29/100

HYDRO. TEST PRESSURE (PT) (MPa)

1.1

8

104

120

8

60

NOTES:

1. Material材料::S30408 (GB/T24511-2017);
2. One piece for each vessel. 每台1件.
3. The required markings on a nameplate shall be in characters not less than $\frac{5}{32}$ in. (4mm) high, and characters shall be either indented or raised at least 0.004 in. (0.10mm) and shall be legible and readable. 铭牌上所需的各种标志, 可采用高度不小于 $\frac{5}{32}$ in. (4mm) 的字符来标志, 标志字符应凹进或凸起至0.004in. (0.10mm), 并且明显易读。

				Nameplate 铭牌				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释 Comment		签名 Signature						
Design by			Date		重量 Weight	0.5Kg	比例 Scale	1:1	Customer:
Approved by			Date		Drawing NO. : TK24326-05 Rev. A				




JABATAN KESELAMATAN DAN KESEHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH





Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00918
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

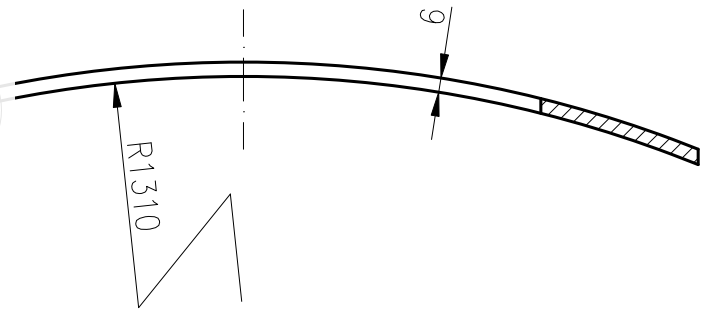

I

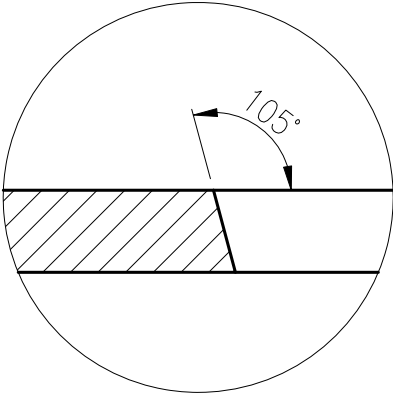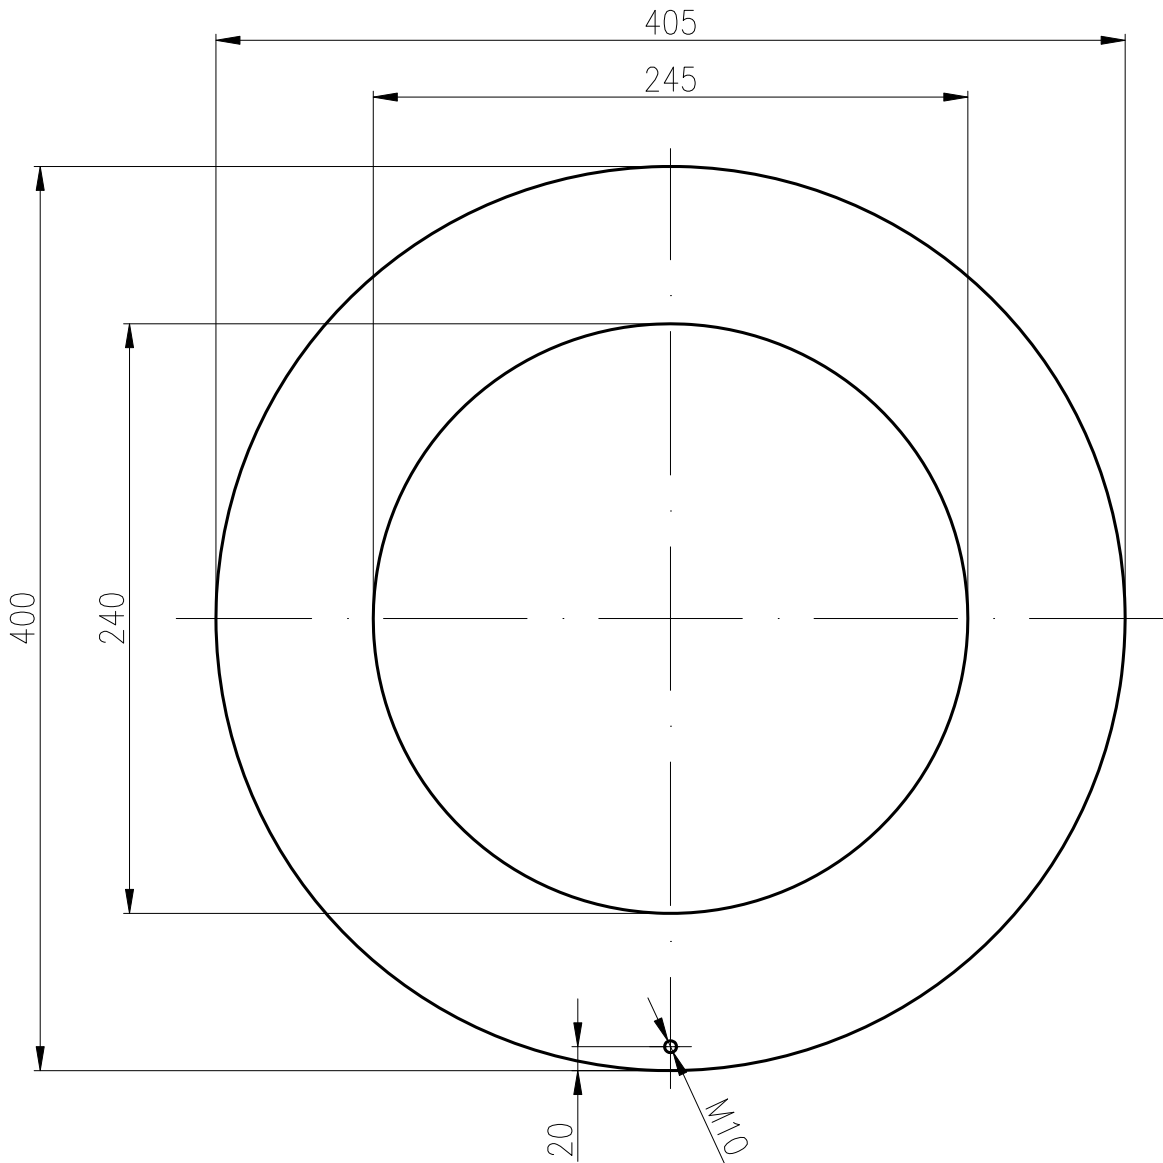

Developed pattern
展开图

Notes:

- Material材料:SA-240M 304.
- Splicing is not allowed unless the provisions given below are satisfied.
补强圈允许拼接，但是要满足下列规定：
 - Individual segments are joined by full penetration butt welds and shall be ground flush;
各个分块部分都由全焊透对接焊缝连接，并且焊缝磨平；
 - Each segment of the reinforcing element shall have a vent hole as required by UG-37(g).
每个分块都要按照UG-37(g)的要求具有一个信号孔。
 - Each butt weld is radiographed or is oriented at least 45 deg from the longitudinal axis of the cylinder.
拼焊焊缝作射线检测或焊缝的布置由圆筒的纵轴起至少为45°。

				Reinforcement pad 补强圈 DN200				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.			
版本 Rev.	注释Comment		签名 Signature	日期Date							
Design by			Date		重量 Weight	4.1kg	比例 Scale	1:1	Customer:		
Approved by			Date		Drawing NO. : TK24326-06 Rev. A						



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00918
VERIFICATION NO.
TARIKH: 05/08/2025
DATE



Verifikasi Dokumen
Document Verification

NOTES:

1. Backing material: SA-240M 304. Lug material: SA-240M 304.

2. 垫板材料: SA-240M 304。吊耳材料: SA-240M 304。



3. Backing plate shall fit the outer wall of the vessel.

垫板应与容器外壁贴合。

4. After assembly and welding of the lug, all parts shall be flat without

distortion. After assembly and welding of the lug, all parts shall be flat without

翘曲。吊耳材料: SA-240M 304。

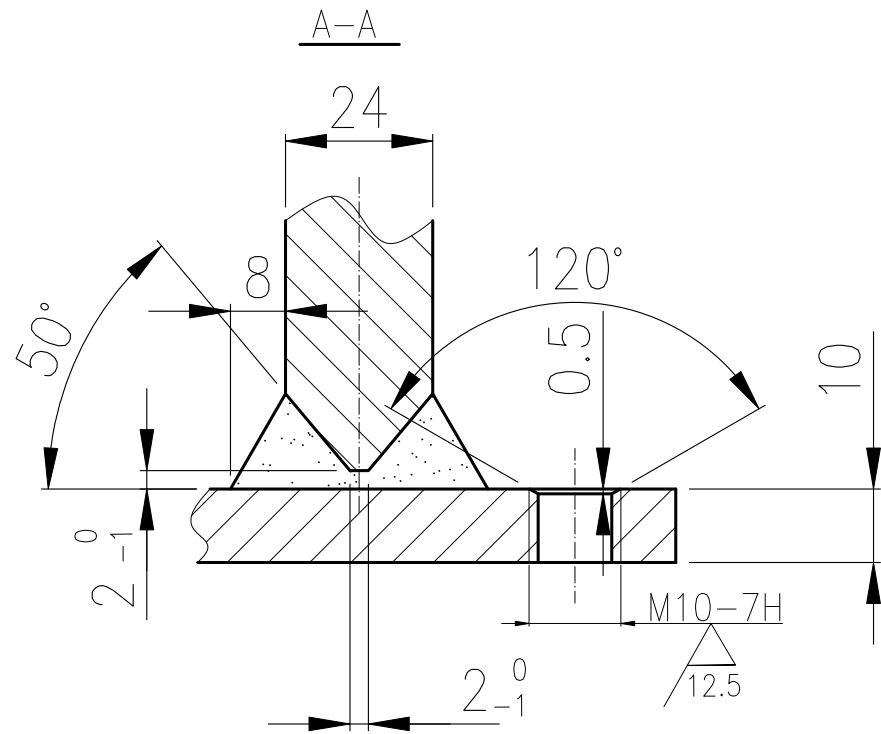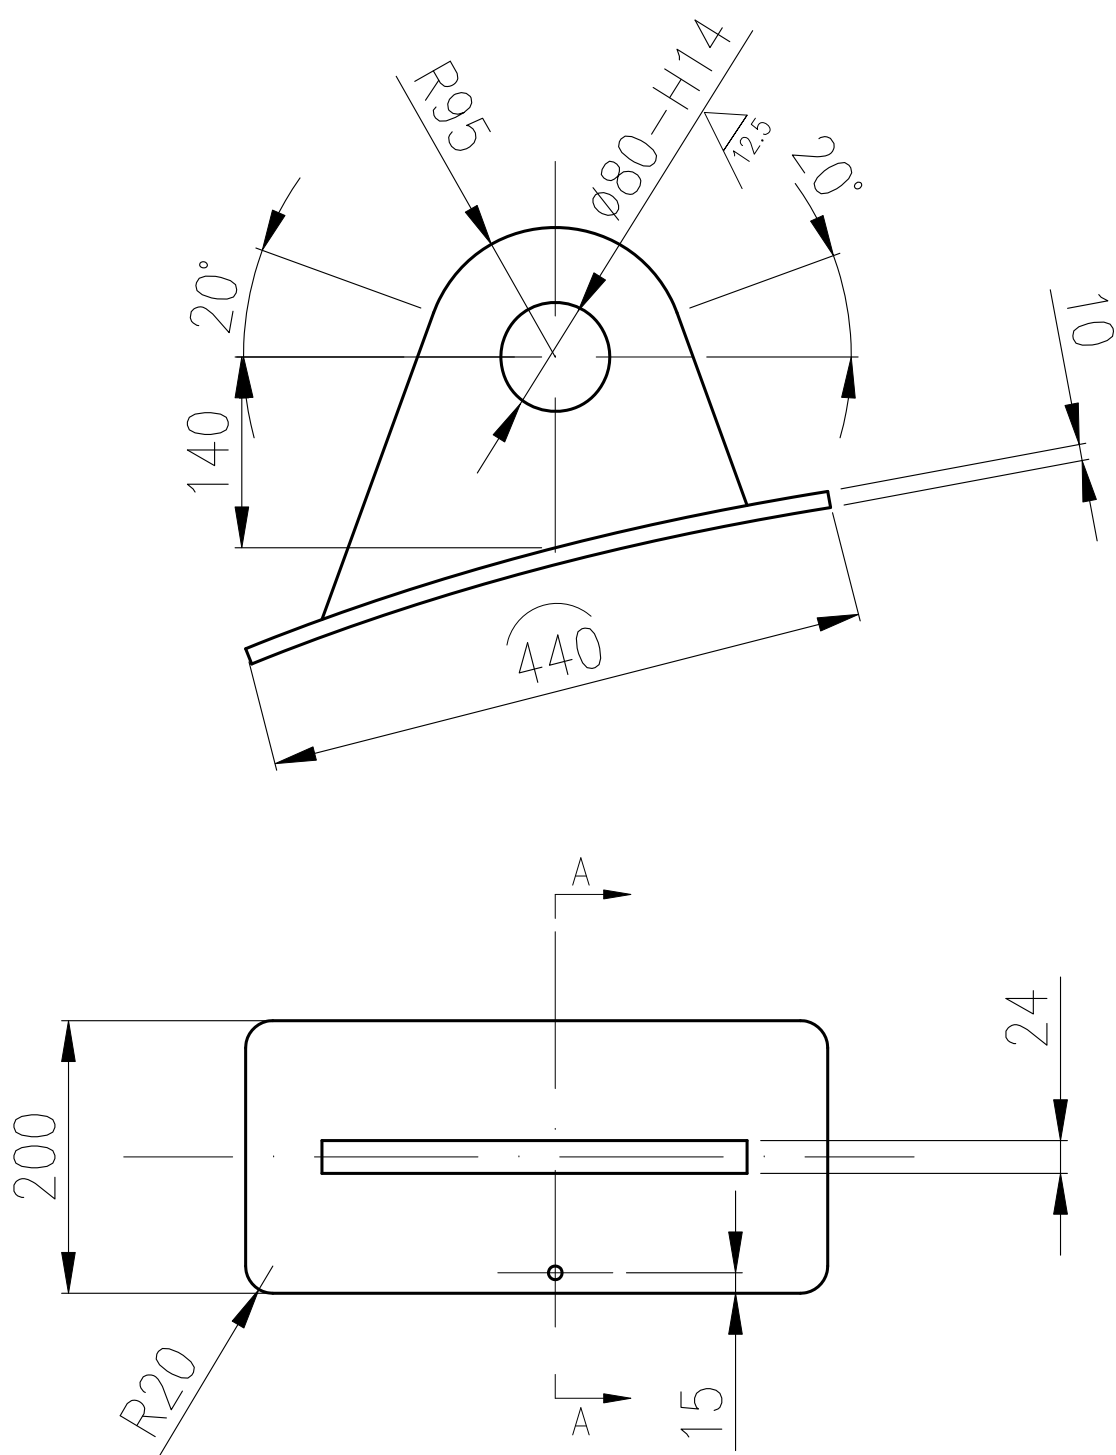

				Lifting lug 吊耳				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date						
Design by			Date		重量 Weight	8.4kg	比例 Scale	1:10	Customer:
					Drawing NO.: TK24326-07 Rev. A				
Approved by			Date						




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00018

TARIKH:
DATE 05/08/2025

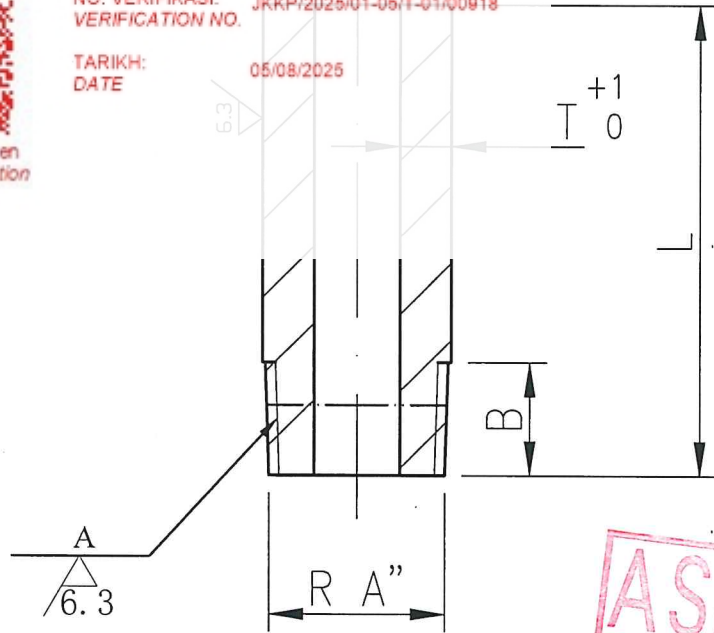

ASME

NOTES:

1. Material: See assembly dwg or purchase note.

材料: 见装配图明细表或采购订单。

2. Material marking should be in accordance with following requirements
(a) Manufacturer's Name or Trademark; (b) Drawing number; (c) Size; (d) Material specification and designation; (e) Heat number;

材料标记需满足以下要求:

(a) 制造厂的名称或商标; (b) 图号; (c) 规格; (d) 材料标准号和牌号; (e) 炉号;
3. Unless noted, otherwise processing surface tolerance shall be as per GB/T1804-2000 Grade m;

除注明外, 未注公差按GB/T1804-2000的m级;

4. End edges shall be chamfered or rounded.
端部边缘应倒角或圆角。

5. Undeclared chamfer is 1X45° ;
未注倒角为1X45° 。

others: 6.3/

16	3"	33.3	9.5	89	80	1.02	
15	2-1/2"	30.2	8	76		0.74	
14	2"	25.7	9.15	60.3		0.58	
13	1-1/2"	21.4	8.15	48.3		0.40	
12	1-1/4"	21.4	6.1	42.2		0.24	
11	1"	19.1	6.7	33.4		0.37	
10	3/4"	16.3	6.35	26.7		0.27	
09	1/2"	15	5.65	21.3		0.21	
08	3"	33.3	9.5	89	50	0.93	
07	2-1/2"	30.2	8	76		0.67	
06	2"	25.7	9.15	60.3		0.58	
05	1-1/2"	21.4	8.15	48.3		0.40	
04	1-1/4"	21.4	6.1	42.2		0.27	
03	1"	19.1	6.7	33.4		0.23	
02	3/4"	16.3	6.35	26.7		0.17	
01	1/2"	15	5.65	21.3		0.13	
XX	A	B (mm)	T (mm)	D (mm)	L (mm)	重量weight (kg)	备注Remark




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00018
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

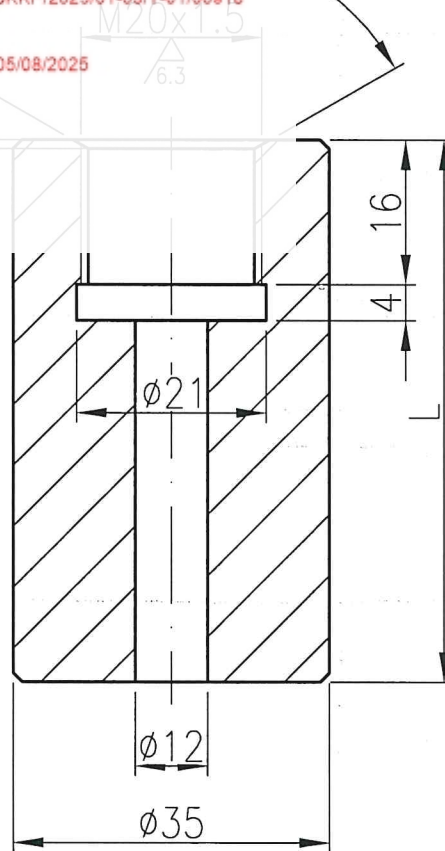

NOTES:

1. Material: See assembly dwg or purchase note.

材料: 见装配图明细表或采购订单。

2. Material marking should be in accordance with following requirements

(a) Manufacturer's Name or Trademark; (b) Drawing number; (c) Size; (d) Material specification and designation; (e) Heat number;

材料标记需满足以下要求:

(a) 制造厂的名称或商标; (b) 图号; (c) 规格; (d) 材料标准号和牌号; (e) 炉号;

3. Unless noted, otherwise processing surface tolerance shall be as per GB/T1804-2000 Grade m;

除注明外, 未注公差按GB/T1804-2000的m级;

4. End edges shall be chamfered or rounded.

端部边缘应倒角或圆角。

5. Undeclared chamfer is 1X45° ;

未注倒角为1X45° 。



others: 12.5/

02	80	0.6	
01	50	0.33	
XX	L (mm)	Weight重量(kg)	备注Remark

				Pressure gauge joint 压力表接头 (M20X1.5)				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd..	
Rev.	Comment		Signature	Date					
Design by	李明		Date	2022.8.23	重量 Weight	/	比例 Scale	/	
Approved by	吕朋		Date	2022.8.23	Drawing NO.: TKTY03-XX Rev. B				Customer:

