
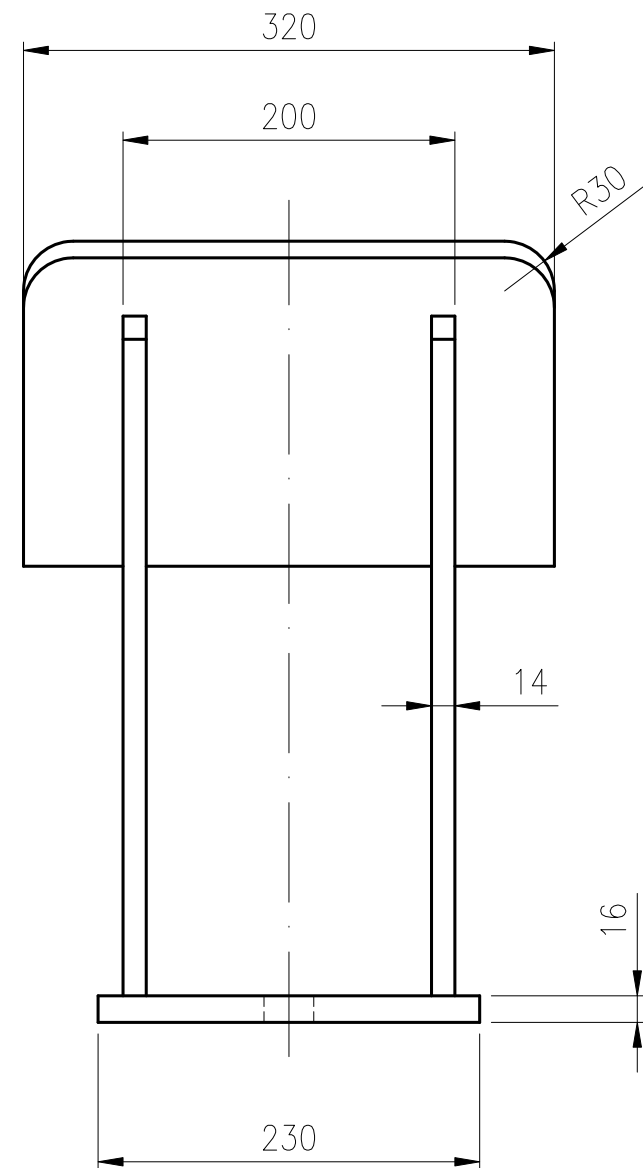


NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923
VERIFICATION NO.
TARIKH: 08/08/2025
DATE

NOTES:

1. Backing material: SA-516M Gr. 485. Rib and base plate material: Q235-B (GB/T3274-2017).
 2. The height of fillet welds is the same as the thinner plate.
 3. The height of the support plate shall fit the outer wall of the vessel.
 4. In the assembly and welding of the support, all parts shall be flat without warping.
- 支座组焊完毕后，各部件应平整，不得翘曲。

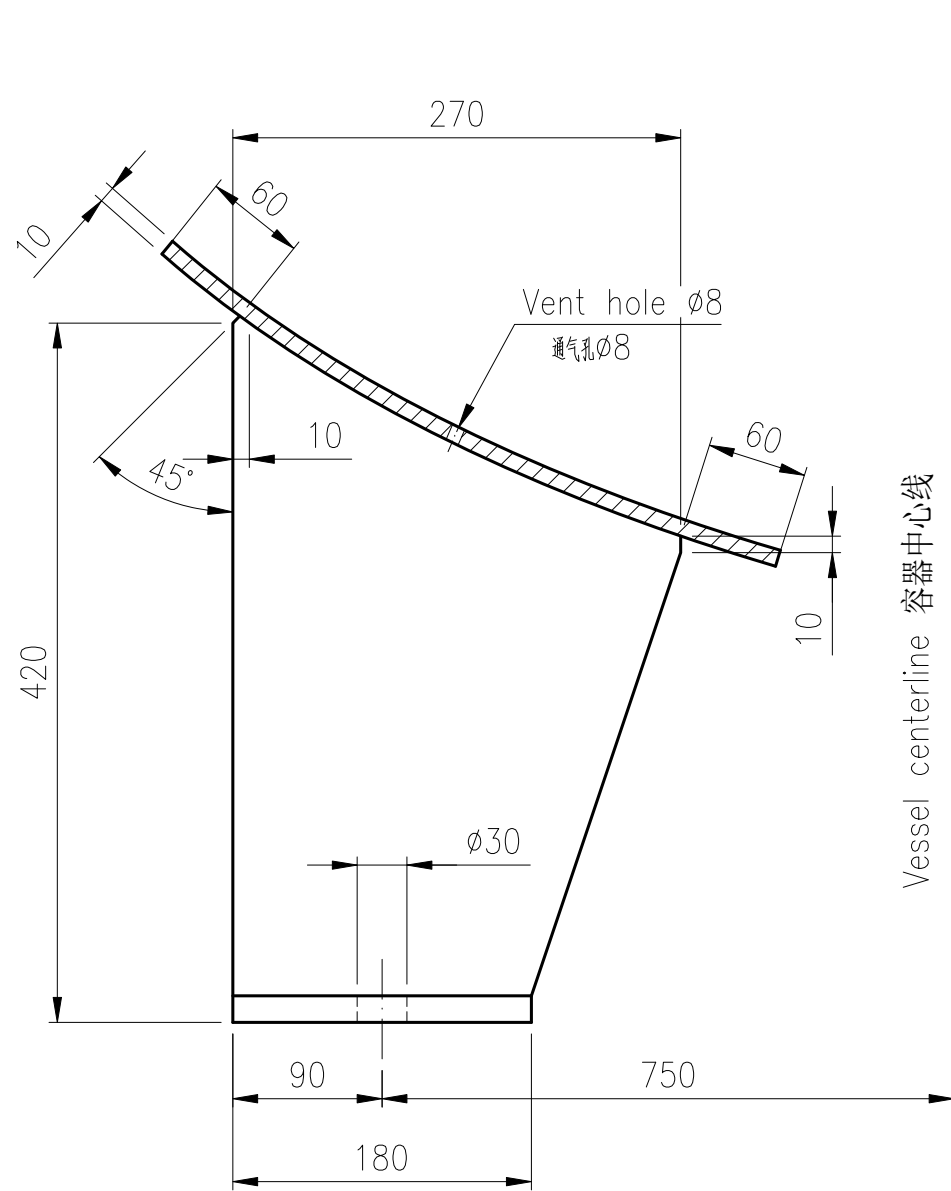

				Support 支座				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date						
Design by			Date		重量 Weight	38kg	比例 Scale	1:10	Customer:
Approved by			Date		Drawing NO.: TK24327-01 Rev. A				






JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923
VERIFICATION NO.
TARIKH: 06/08/2025
DATE

others

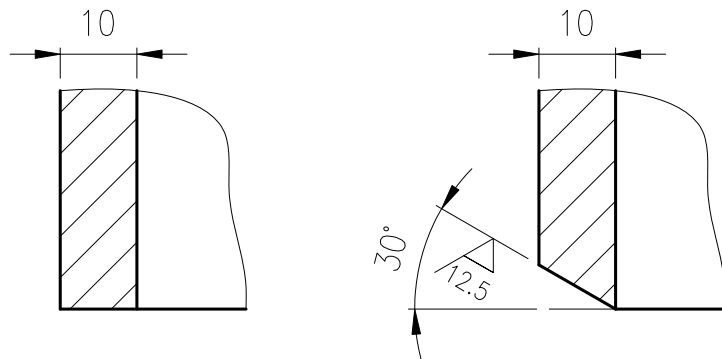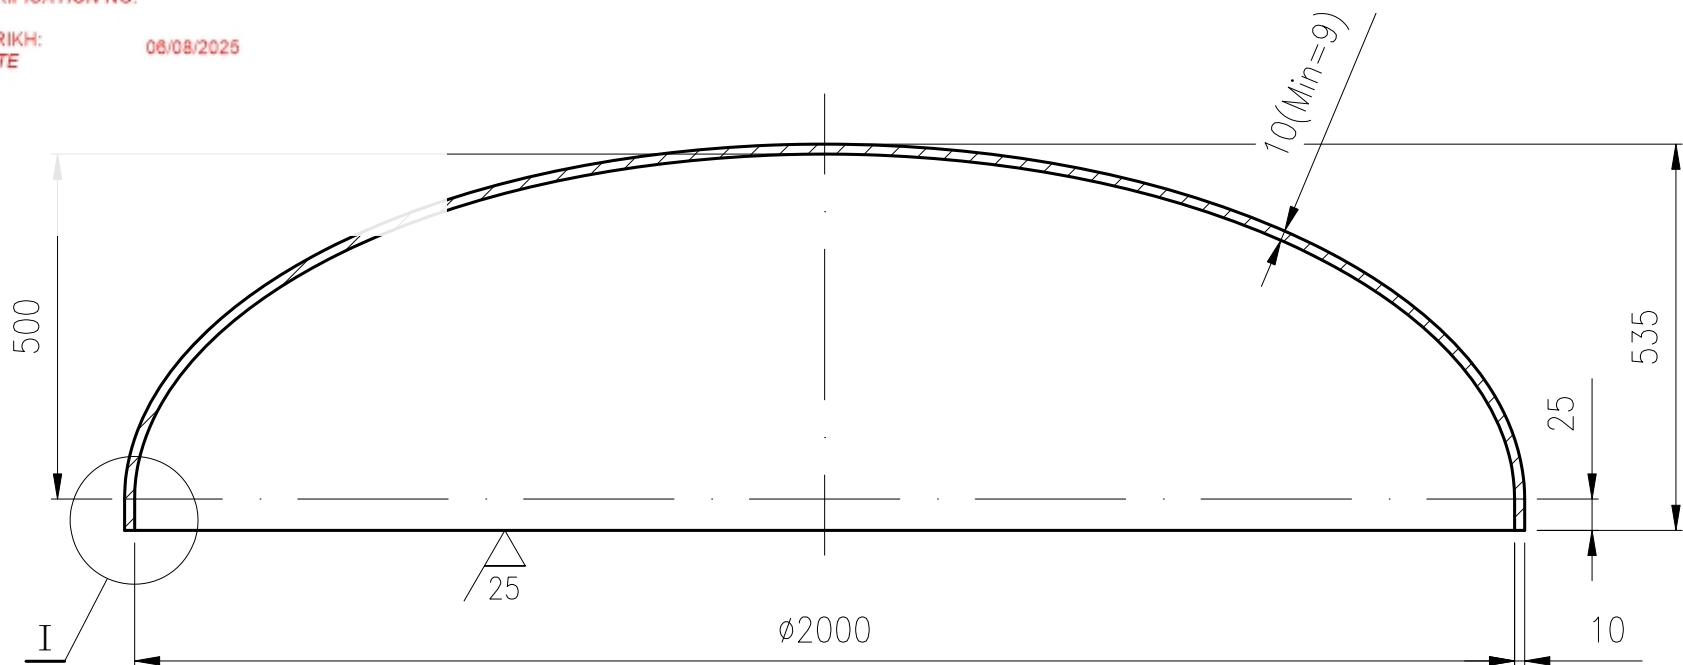

NOTES:

- Code 规范:ASME VIII-1, 2023 ED, No stamp;
- MAWP 最高允许工作压力:0.84 MPa at 100℃;
- MDMT 最低金属设计温度:-18℃ at 0.84 MPa;
- Corrosion allowance 腐蚀裕量: 1.0 mm;
- Material 材料:SA-516M Gr.485;
- NDE: Spot RT as per UW-52; 无损检测:局部RT;
- Impact test:Exemption(UCS-66); 冲击试验:豁免(UCS-66);
- Heat treatment after forming:Exemption(UCS-56). 成形后热处理:豁免(UCS-56);
- The minimum thickness of ellipsoidal head after forming shall be 9.0 mm.
封头成型后最小厚度为9.0 mm.
- As per UG-81, the inner surface of a ellipsoidal head shall not deviate outside of the specified shape by more than 1.25%D nor inside the specified shape by more than $\frac{5}{8}\%$ of D. The skirts of heads shall be sufficiently true to round so that the difference between the maximum and minimum inside diameters shall not exceed 1% of the nominal diameter.
根据UG-81, 椭圆形封头的内表面与规定形状(样板)的向外偏差不得大于1.25%D(25mm), 且与规定形状的向内偏差不得大于 $\frac{5}{8}\%$ D(12.5mm)。封头的直边应该有足够的圆度, 使最大及最小内径之差不超过公称直径的1%。
- Other size requirement refer to GB/T25198-2023.
其他尺寸要求参照GB/T25198-2023。
- The head groove of each vessel shall be one flat groove and one outer slope according to Detail I.
每台容器的封头坡口按照详图I, 平坡口和外坡口各一件。

				2:1 ellipsoidal head 2:1椭圆封头			浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释 Comment	签名 Signature	日期 Date					
Design by		Date		重量 Weight	346kg	比例 Scale	1:25	
Approved by		Date		Drawing NO. : TK24327-02 Rev. A			Customer:	



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923

VERIFICATION NO.

08/08/2025

TARIKH: DATE



Verifikasi Dokumen
Document Verification

NOTES:

Backing material:SA-516M Gr.485.Lug material:SA/GB713 Q345R.



垫板材料:SA-516M Gr.485。吊耳材料: SA/GB713 Q345R。

The backing plate shall fit the outer wall of the vessel.

垫板应与容器外壁贴合。

After assembly and welding of the lug, all parts shall be flat without

翘曲。After assembly and welding of the lug, all parts shall be flat without

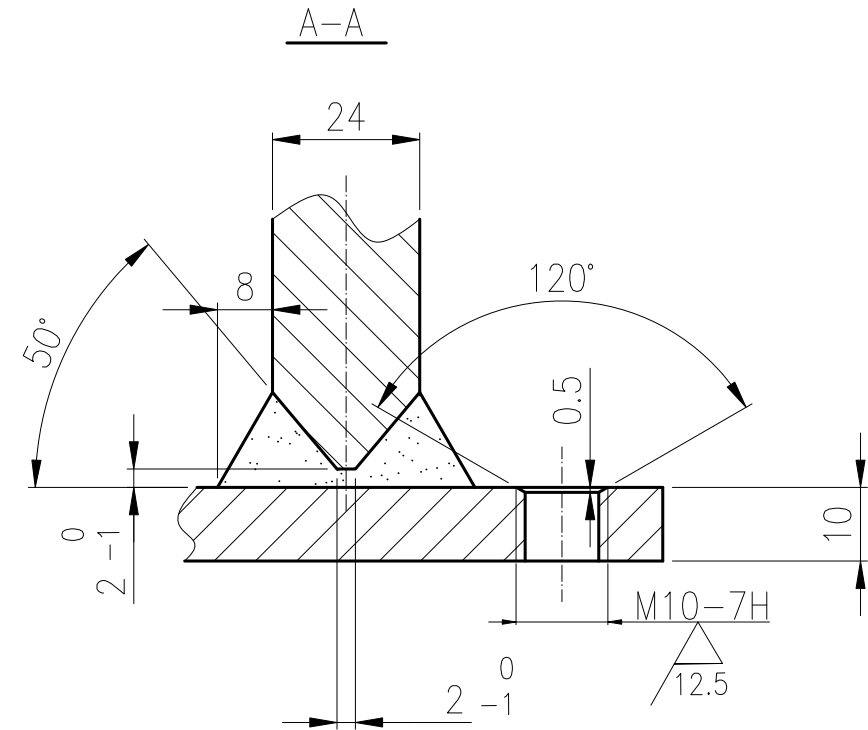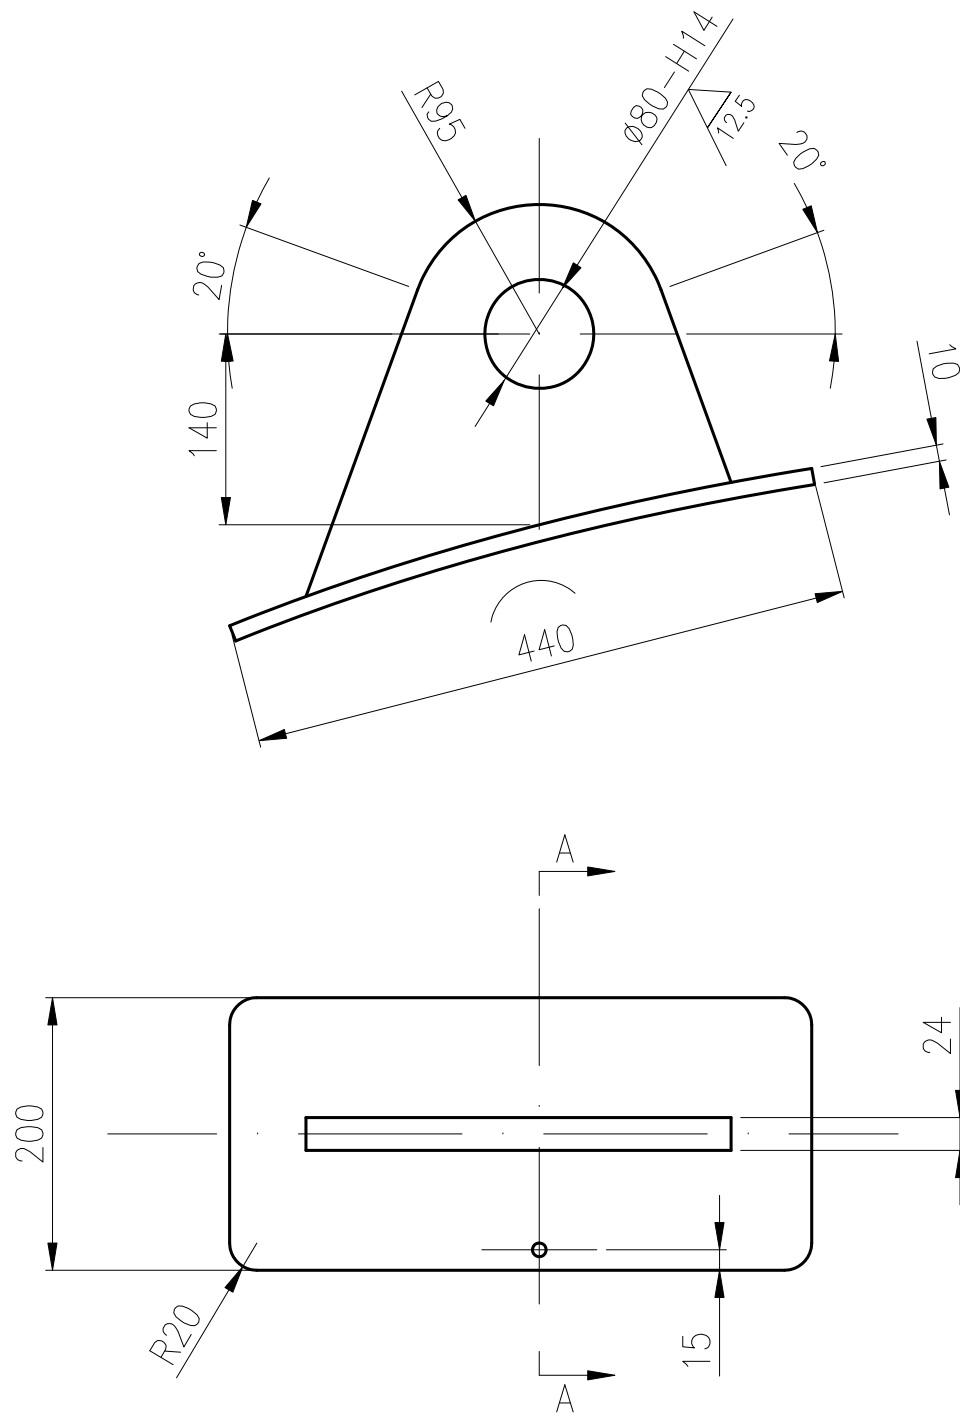

				Lifting lug 吊耳				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date						
Design by		Date		重量 Weight	7.5kg	比例 Scale	1:10	Customer:	
Approved by		Date		Drawing NO.: TK24327-03 Rev. A					



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923
VERIFICATION NO.
TARIKH: 06/08/2025
DATE



Zhejiang Tank Pressure Vessel Co., Ltd.
No. 6, Chunyuan West Road, Quzhou City, Zhejiang Province,
People's Republic of China

CODE: ASME SECT. VIII DIV. 1 2023 EDITION

EQUIPMENT NAME	Air receiver	VOLUME (V) (m³)	15.0
PRODUCT NO.	TK24327-XXX	WEIGHT (Kg)	3085
TEST DATE	XXXX/XX/XX	YEAR BUILT	XXXX
DESIGN PRESSURE (PS) (MPa)	0.84		
MIN/MAX ALLOWABLE TEMPERATURE (TS) (°C)	-18/100		
HYDRO. TEST PRESSURE (PT) (MPa)	1.1		

NOTES:

1. Material材料::S30408 (GB24511-2009);
2. One piece for each vessel. 每台1件.
3. The required markings on a nameplate shall be in characters not less than 5/32 in. (4mm) high, and characters shall be either indented or raised at least 0.004 in. (0.10mm) and shall be legible and readable. 铭牌上所需的各种标志, 可采用高度不小于 5/32 in. (4mm) 的字符来标志, 标志字符应凹进或凸起至0.004in. (0.10mm), 并且明显易读。

				Nameplate 铭牌				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释 Comment	签名 Signature	日期 Date						
Design by		Date		重量 Weight	1.0	比例 Scale	1:1	Customer:	
Approved by		Date		Drawing NO. : TK24327-04 Rev. A					





JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923
VERIFICATION NO.
TARIKH: 06/08/2025
DATE

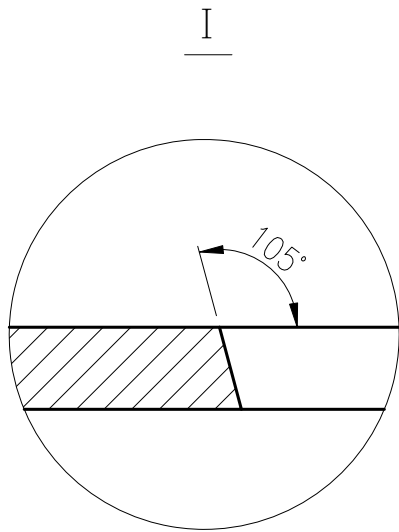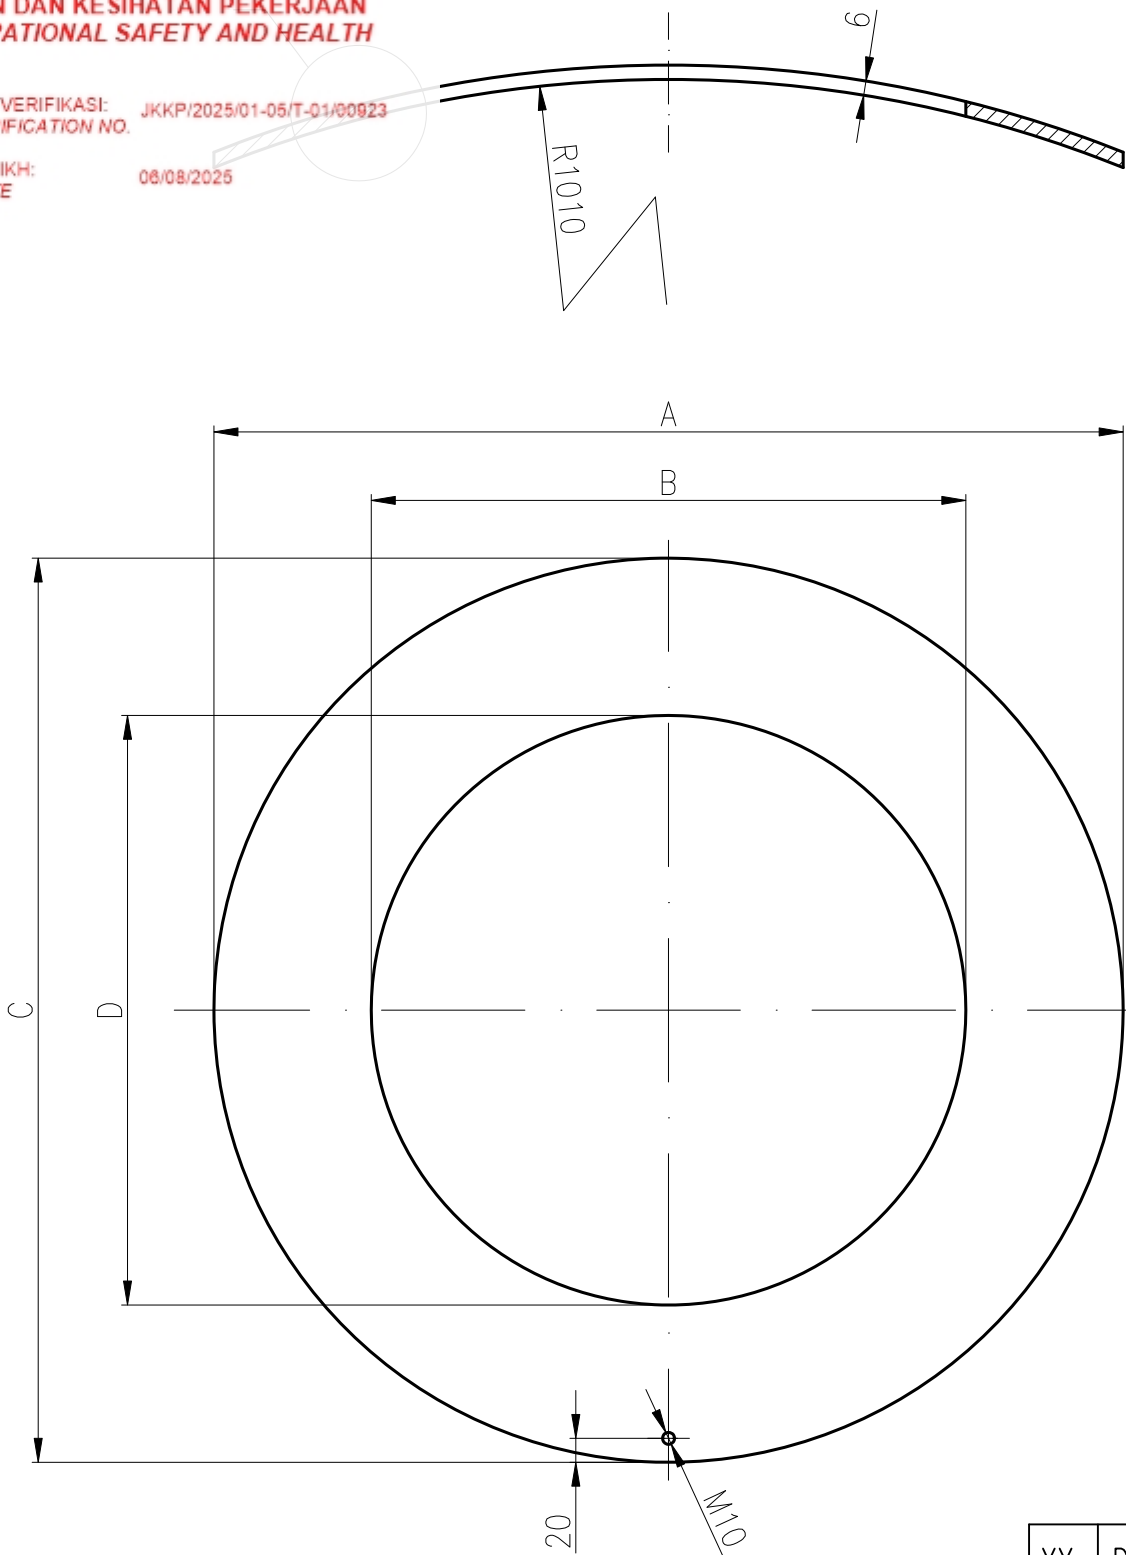

Developed pattern
展开图

XX	DN吋	A	B	C	D	W
01	DN150	300	188	300	188	2.35
02	DN450	764	481	760	477	12.7

Notes:

1. Material材料:SA-516M Gr. 485.
2. Splicing is not allowed unless the provisions given below are satisfied.
补强圈允许拼接，但是要满足下列规定：
 - (1)Individual segments are joined by full penetration butt welds and shall be ground flush;
各个分块部分都由全焊透对接焊缝连接，并且焊缝磨平；
 - (2) Each segment of the reinforcing element shall have a vent hole as required by UG-37(g).
每个分块都要按照UG-37(g)的要求具有一个信号孔。
 - (3)Each butt weld is radiographed or is oriented at least 45 deg from the longitudinal axis of the cylinder.
拼焊焊缝作射线检测或焊缝的布置由圆筒的纵轴起至少为45° 。



				Reinforcement pad 补强圈				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
版本 Rev.	注释Comment		签名 Signature						
Design by			Date		重量 Weight	W kg	比例 Scale	1:1	Customer:
Approved by			Date		Drawing NO. : TK24327-05-XX Rev. A				



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923
VERIFICATION NO.
TARIKH: 08/08/2025
DATE




Verifikasi Dokumen
Document Verification

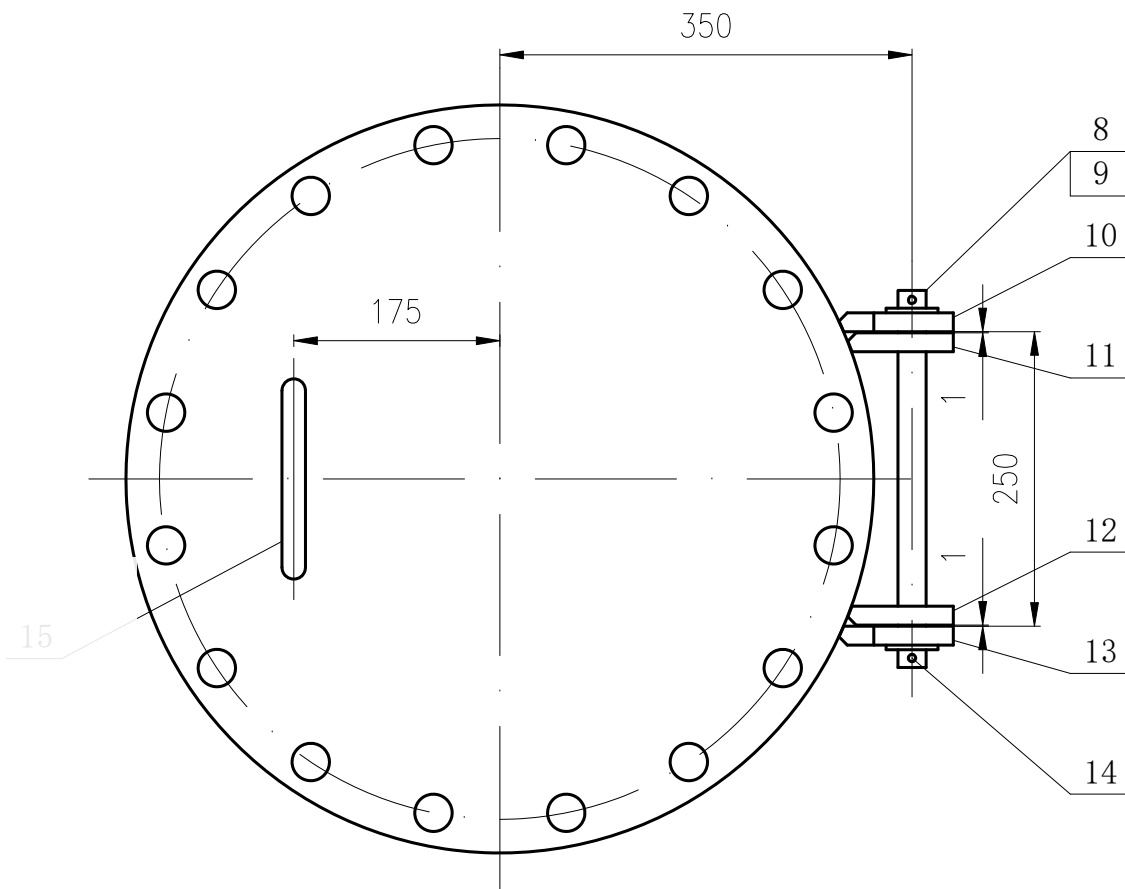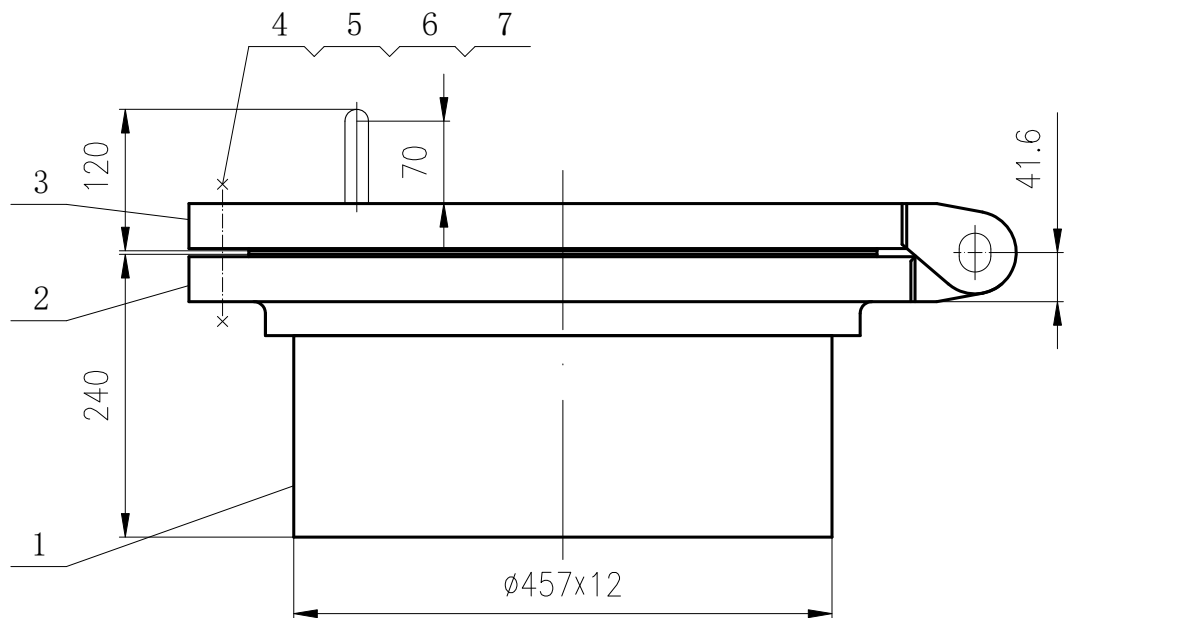

1. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
2. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
3. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
4. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
5. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
6. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
7. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
8. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
9. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
10. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
11. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
12. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
13. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
14. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.
15. Types and dimension for welding joint shall meet the requirements of ASME VIII-1; the size of fillet welds per thickness of thinner plate welded.

Welding detail for flange
to pipe
法兰与接管焊接视图

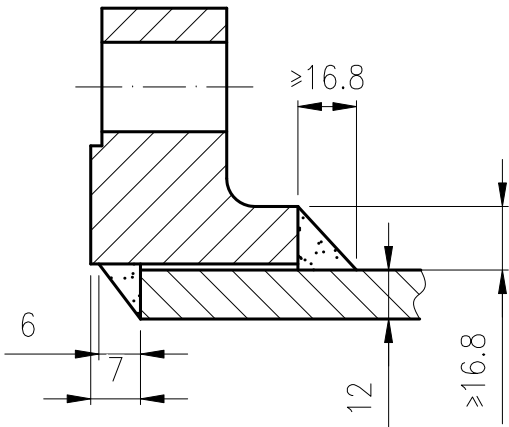

15	TK24324-03-06	Handle 把手 Ø20	1	SA-105M		0.7	
14	GB/T91-2000	Pin 销 6.3×30	2	Q215	/	/	
13	TK24324-03-05	Cover lug 盖轴耳 II	1	SA/GB713 Q345R		0.7	
12	TK24324-03-04	Flange lug 法兰轴耳 II	1	SA/GB713 Q345R		0.6	
11	TK24324-03-03	Flange lug 法兰轴耳 I	1	SA/GB713 Q345R		0.6	
10	TK24324-03-02	Cover lug 盖轴耳 I	1	SA/GB713 Q345R		0.7	
9	GB/T95-2002	Plain Washer 平垫圈 24	2	100HV	/	/	
8	TK24324-03-01	Shaft pin 轴销	1	20 (GB/T699)		1.3	
7	ASME B18.22.1	Plain Washer 平垫圈 NPS 1-1/8	16	100HV	0.05	0.8	Latest edition
6	ASME B18.2.2	Nut 螺母 1-1/8-8UN-2B	16	SA-194M-2H	0.09	1.44	Latest edition
5	ASME B18.2.1	Bolt 螺栓 1-1/8-8UN-2A, L=135	16	SA-193M-B7	0.18	2.88	Latest edition
4		Gasket 垫片 Ø548×Ø458, T=3	1	Elastomers with cotton fabric insertion 含有棉纤维的橡胶		/	
3	ASME B16.5-2020	Blind 法兰盖 BL 450-150 RF	1	SA/GB713 Q345R		98.5	
2	ASME B16.5-2020	Flange 法兰 SO 450-150 RF	1	SA-105M		49.5	
1		Pipe 接管 Ø457×12, L=233	1	SA-516M Gr.485		30.7	
序号 No.	标准号 Standard	名称 Name	数量 QTY.	材料 Material	单件 Single 重量 Weight	总计 total Kg	备注 Remark
Rev.	Comment	Signature	Date				
Design by		Date		重量 Weight	188.4kg	比例 Scale	1:10
Approved by		Date		Drawing NO. : TK24324-03 Rev. A		Customer:	




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00923

TARIKH:
DATE 06/08/2025

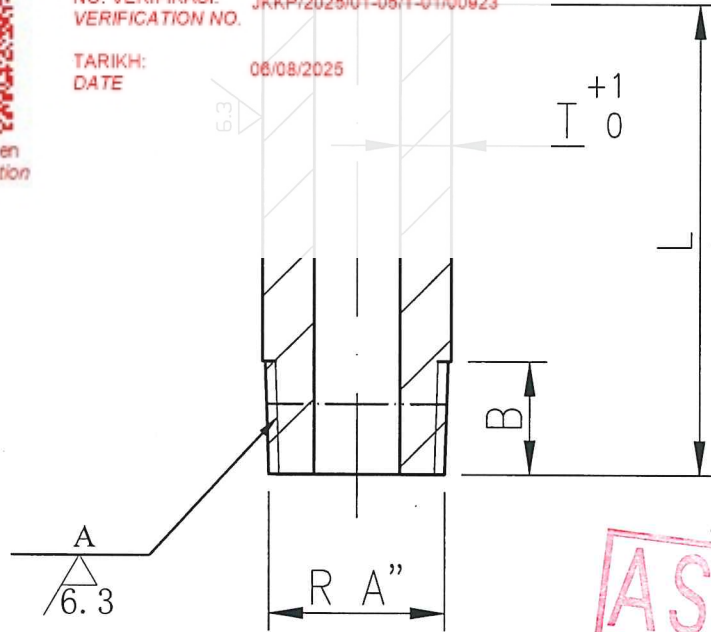

ASME

NOTES:

1. Material: See assembly dwg or purchase note.

材料: 见装配图明细表或采购订单。

2. Material marking should be in accordance with following requirements

(a) Manufacturer's Name or Trademark; (b) Drawing number; (c) Size; (d) Material specification and designation; (e) Heat number;

材料标记需满足以下要求:

(a) 制造厂的名称或商标; (b) 图号; (c) 规格; (d) 材料标准号和牌号; (e) 炉号;
3. Unless noted, otherwise processing surface tolerance shall be as per GB/T1804-2000 Grade m;

除注明外, 未注公差按GB/T1804-2000的m级;

4. End edges shall be chamfered or rounded.
端部边缘应倒角或圆角。

5. Undeclared chamfer is 1X45° ;
未注倒角为1X45° 。

others: 6.3/

16	3"	33.3	9.5	89	80	1.02	
15	2-1/2"	30.2	8	76		0.74	
14	2"	25.7	9.15	60.3		0.58	
13	1-1/2"	21.4	8.15	48.3		0.40	
12	1-1/4"	21.4	6.1	42.2		0.24	
11	1"	19.1	6.7	33.4		0.37	
10	3/4"	16.3	6.35	26.7		0.27	
09	1/2"	15	5.65	21.3		0.21	
08	3"	33.3	9.5	89	50	0.93	
07	2-1/2"	30.2	8	76		0.67	
06	2"	25.7	9.15	60.3		0.58	
05	1-1/2"	21.4	8.15	48.3		0.40	
04	1-1/4"	21.4	6.1	42.2		0.27	
03	1"	19.1	6.7	33.4		0.23	
02	3/4"	16.3	6.35	26.7		0.17	
01	1/2"	15	5.65	21.3		0.13	
XX	A	B (mm)	T (mm)	D (mm)	L (mm)	重量weight (kg)	备注Remark

				Screwed joint (R) 插入式Rp外螺纹接头			浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.	
Rev.	Comment	Signature	Date					
Design by	田家欢	Date	2023.11.7	重量 Weight	/	比例 Scale	/	
Approved by	田家欢	Date	2023.11.7	Drawing NO.: TKTY02-XX Rev. C			Customer:	




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00923
VERIFICATION NO.
TARIKH: 06/08/2025
DATE

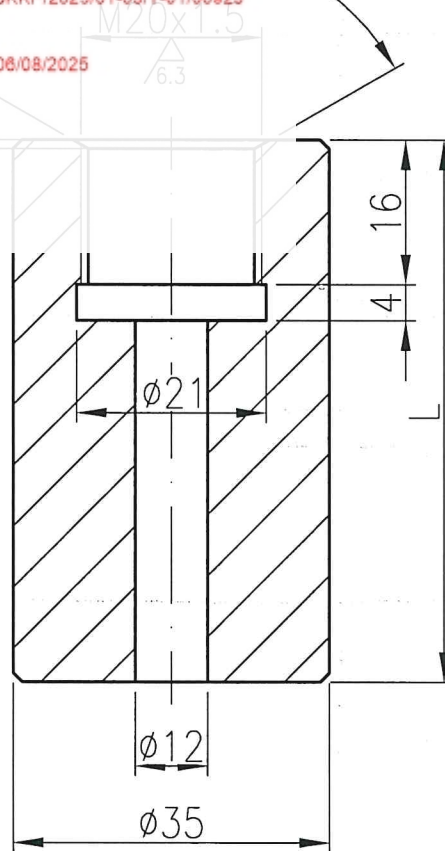

NOTES:

1. Material: See assembly dwg or purchase note.

材料: 见装配图明细表或采购订单。

2. Material marking should be in accordance with following requirements

(a) Manufacturer's Name or Trademark; (b) Drawing number; (c) Size; (d) Material specification and designation; (e) Heat number;

材料标记需满足以下要求:

(a) 制造厂的名称或商标; (b) 图号; (c) 规格; (d) 材料标准号和牌号; (e) 炉号;

3. Unless noted, otherwise processing surface tolerance shall be as per GB/T1804-2000 Grade m;

除注明外, 未注公差按GB/T1804-2000的m级;

4. End edges shall be chamfered or rounded.

端部边缘应倒角或圆角。

5. Undeclared chamfer is 1X45° ;

未注倒角为1X45° 。



others: 12.5/

02	80	0.6	
01	50	0.33	
XX	L (mm)	Weight重量(kg)	备注Remark

				Pressure gauge joint 压力表接头 (M20X1.5)	浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd..			
Rev.	Comment	Signature	Date					
Design by	李明	Date	2022.8.23	重量 Weight	/	比例 Scale	/	Customer:
Approved by	吕明	Date	2022.8.23	Drawing NO. : TKTY03-XX Rev. B				



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/T-01/00923

TARIKH:
DATE 08/08/2025

ASME

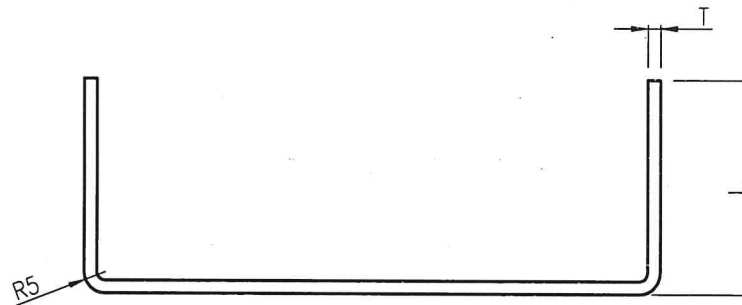

NOTES:

1. Material: as per drawing.
材料: 见图纸。

12	3	150	SA-240M 304	1.0
11		120		0.83
10		70		0.6
09		25		0.45
08	4	150	SA/GB713 Q345R	1.28
07		120		1.1
06		70		0.8
05		25		0.6
04	2	150	Q235-B	0.64
03		120		0.55
02		70		0.4
01		25		0.3
XX	T (mm)	L (mm)	Material材料	Weight重量 (kg)

				Nameplate supprot (Vertical) 铭牌支架(立式)				浙江泰克压力容器有限公司 Zhejiang Tank Pressure Vessel Co., Ltd.			
Rev.	Comment		Signature		Date						
Design by	田家明		Date	2023.11.17		重量 Weight	/kg	比例 Scale	1:2		
Approved by	田家明		Date	2023.11.17		Drawing NO.: TKTY06-XX Rev. C				Customer:	