




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




NO. VERIFIKASI:
VERIFICATION NO. JKKP/2025/01-05/IT-01/00940
TARIKH:
DATE 11/08/2025


Verifikasi Dokumen
Document Verification

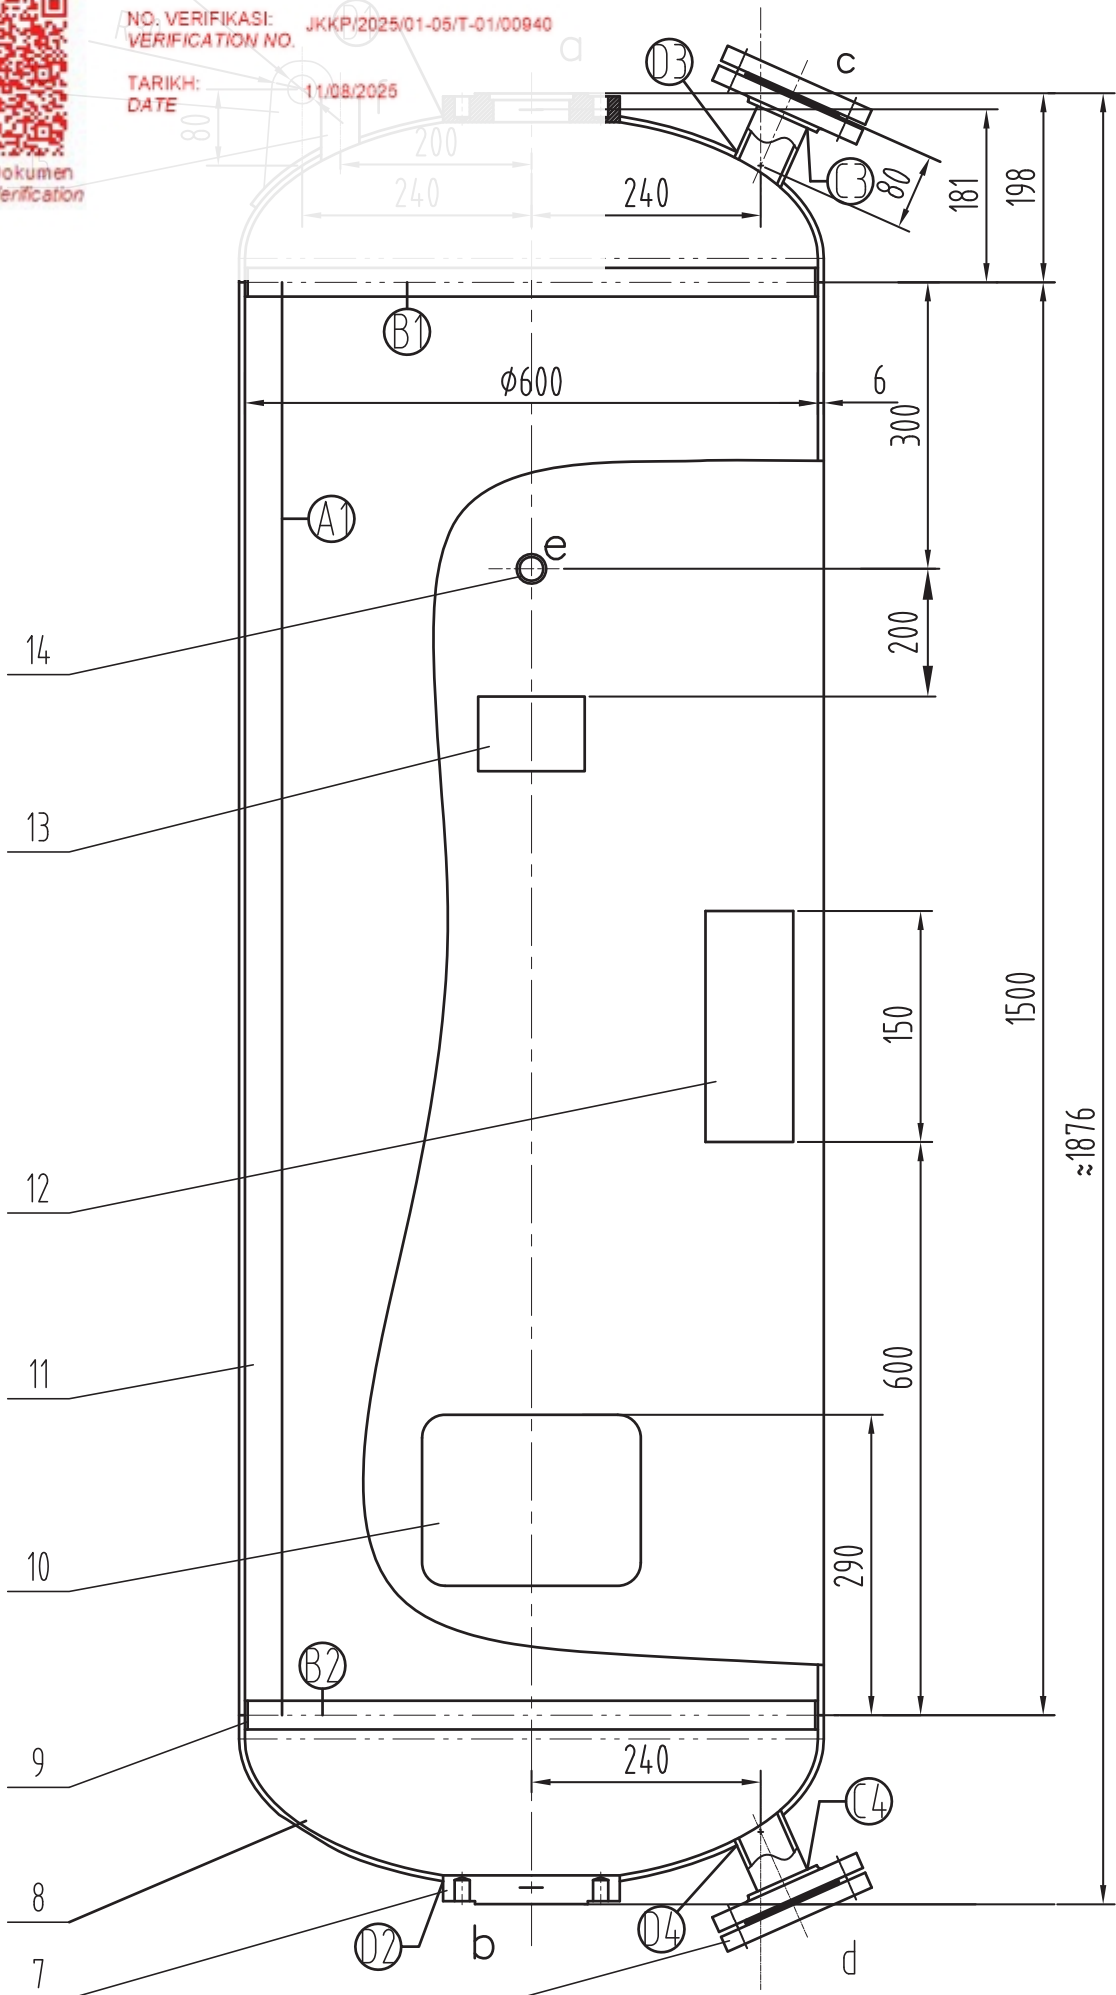


A1 焊接详图
Welding detail of A1
NO SCALE

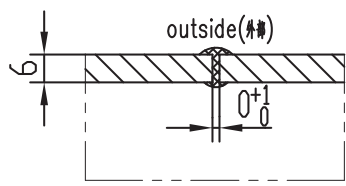


D1,D2,D3,D4 焊接详图
Welding detail of D1,D2,D3,D4
NO SCALE

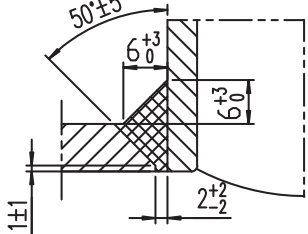


C3,C4 焊接详图
Welding detail of C3,C4
NO SCALE

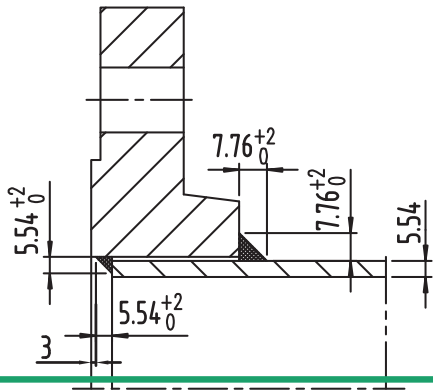


左吸附器方位图
Left adsorption cartridges diagram

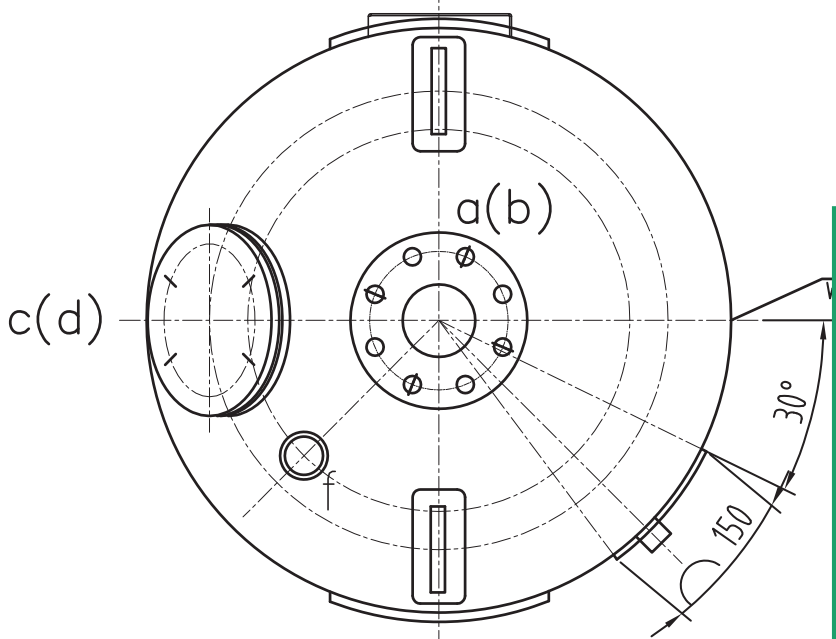

右吸附器方位图
Right adsorption cartridges diagram

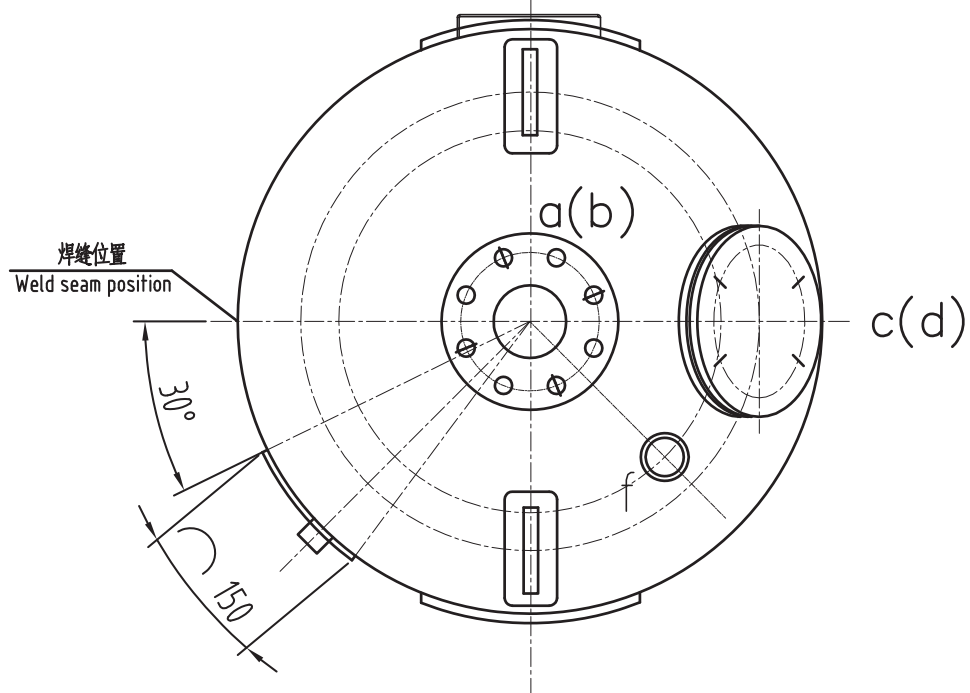

B1,B2 焊接详图
Welding detail of B1,B2
NO SCALE

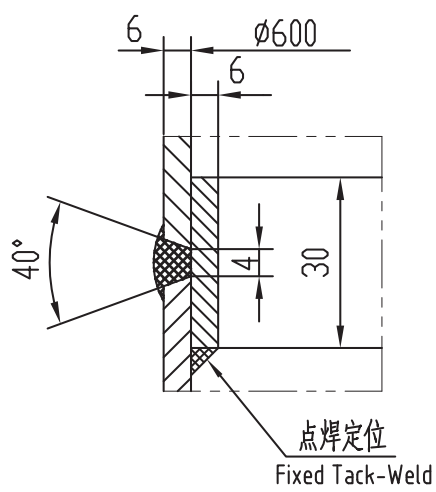

APPROVED

This document has been examined and given the status as shown in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12

Date: 28 October 2024 Initials: WL

Office: Shanghai Design Appraisal Cent

LRQA Verification Limited

LRQA007 11.2021

设计数据表 DESIGN SPECIFICATION			
规格 CODE	ASME Code Section VIII Division 1, 2023 Edition		
规格钢印 CERTIFICATION MARK WITH DESIGNATOR	U	工作介质 SERVICE FLUID	空气 Air
设计压力 DESIGN PRESS	1.1	介质的危害程度 LETHAL SERVICE	NON-LETHAL(环境无)
最大允许工作压力 MAX ALLOWANCE WORKING PRESSURE	1.1 AT 200 °C	容积 TOTAL VOLUME	0.5
操作压力 OPERATING PRESSURE	1.0	焊后热处理 POSTWELD HEAT TREATMEN	NO 不需要 per UCS-56(a) and UW-2
设计温度 DESIGN TEMPERATURE	200	冲击试验要求 IMPACT TESTING	NO 不需要 per UCS-20(f) and UCS-66(a), fig UCS-66 general note(f)
工作温度 OPERATING TEMPERATURE	180	水压试验金属温度 HYDROSTATIC TEST TEMP	5~48
最小设计金属温度 MIN DESIGN METAL TEMP	0 °C AT 1.1 MPa	水压试验压力 HYDRO TEST PRESS	1.5
腐蚀裕量 CORROSION ALLOWANCE	1.0	设备净重 NET MASS	240
焊接接头系数(壳体/封头) JOINT EFFICIENCY (SHELL/HEAD)	0.85(0.8)/0.85	设备最大质量(充水) MASS OF FULL WATER	740
内部附件载荷: The attachment of internals;		NO	由附属设备重量产生附加静载荷 Superimposed static reactions from weight of attached equipment;
由压力或温度变化引起的循环和动载荷: Cyclic and dynamic reactions due to pressure or thermal;		NO	容器支撑附加载荷: The attachment of vessel support;
由机械负载产生的循环和动载荷: Cyclic and dynamic reactions due to mechanical loadings;		NO	由安装在容器上的设备产生循环和动载荷: Cyclic and dynamic reactions from equipment mounted on the vessel;
由流体冲击引起的撞击载荷: Impact reactions such as those due to fluid shock;		NO	风载荷、雪载荷、地震载荷: Wind reactions.Snow reactions- Seismic reactions;
由爆破引起的异常压力增加: Abnormal pressure,such as those cased by deflagration;		NO	温度梯度引起的载荷、热膨胀差引起的应力: Temperature gradients- Differential thermal expansion;
			试验压力和实验中产生的静压头: Test pressure and coincident static head acting during the test;

无损探伤要求 NDE Requirements

需要作的检查 Required Examination	焊缝代号 Welded Joint Number	A 类接头 CAT.A Joints	B 类接头 CAT.B Joints	接管与法兰连接焊缝 Joints Of NozzleTo Flange	接管与壳体连接焊缝 Joints Of NozzleTo Shell	其他附属连接 Attach. Joints
射线检查 Radiographic Examination		SPOT	SPOT	NA	NA	NA
超声波检查 Ultrasonic Examination		NA	NA	NA	NA	NA
磁粉检查 Magnetic Examination		NA	NA	NA	NA	NA
渗透检查 Liquid Penetrant Examination		NA	NA	NA	NA	NA

技术要求:

- 除非另有说明,未注明的连接公差按HG/T20584-2020中的规定,机加工零件的未注公差按GB/T1804-2014的M级执行。
- 除图中注明外,所有焊接焊缝的厚度均等于连接件中最薄者的厚度。
- 管口方位见本图。
- 除图中注明外,图纸中所有尺寸的单位均为mm。
- 设备除锈后,外表面涂两层红醇酸底漆,再涂两层银灰色面漆。
- 插入壳体的接管内边缘应倒角或圆角。

TECHNICAL SPECIFICATION:

- UNLESS OTHERWISE SPECIFIED,TEH UNSPECIFIED TOLERANCE FOR ASSEMBLING SHALL COMPLY WITH HG/T20584-2020 ,TEH UNSPECIFIED TOLERANCE FOR FABRICATION SHALL COMPLY WITH CLASS M OF GB/T 1804-2014.
- EXCEPTED INDICATION ON DRAWING,THE FILLET WELDS MUST HAVE SIZES EQUAL TO THE THINNER THICKNESS OF THE ILATES.
- NOZZLE ORIENTATION SEE THIS DRAWING.
- ALL DIMENSIONS ARE MM EXCEPT AS OTHERWISE NOTED.
- AFTER CLEANING, TWO LAYERS OF RED LACQUER AND TWO LAYERS OF SILVER GRAY LACQUER ON THE OUTSIDE SURFACE.
- EXPOSED INSIDE EDGES SHALL BE CHAMFERED OR ROUNDED.

管口表 LIST OF NOZZLE

编号 MARK NO.	规格 SPECIFICATION	名称 NAME	标准 STANDARD	密封面 SEALING TYPE	接管规格 Took on the neckspecifications	伸出长度 EXTEND LENGTH	备注 REMARK
a	DN100	进气口 inlet	ASME B16.5-2020 SO100-150#RF	RF	/	/	
b	DN100	出气口 Outlet	ASME B16.5-2020 SO100-150#RF	RF	/	/	
c	DN50	检查口 Inspection Opening	ASME B16.5-2020 SO50-150#RF	RF	OD.60.3x5.54	80	
d	DN50	检查口 Inspection Opening	ASME B16.5-2020 SO50-150#RF	RF	OD.60.3x5.54	80	
e	DN25	安全阀口 Safety Valve	ASME B16.11-2021 NPT1"	Thread	OD.44x7	80	
f	DN6	压力表口 Pressure Gauge	ASME B16.11-2021 NPT1/8"	Thread	OD.16x4.8	40	

16	ZL-A-24020.1	吊耳 Lifting lugs	2	SA/GB713 Q345R	0.92	1.84	
15	ZL-A-24020.2	束结 Hanging lugs NPT1/8"-3000#	2	SA-105M		0.1	f
14	ZL-A-24020.3	束结 Half-Coupling NPT1"-3000#	1	SA-105M		0.28	e
13	ZL-A-24020.4	铭牌 Name plate & Bracket	1	Component		2.8	
12	ZL-A-24020.5	垫板 Base plate 150x6x150	1	SA/GB713 Q345R		1.06	
11	ZL-A-24020.6	筒体 Shell ID.600x6	1	SA/GB713 Q345R		134.5	L=1500
10	ZL-A-24020.7	垫板 Base plate 110x6x140	1	SA/GB713 Q345R		0.72	
9	ZL-A-24020.8	垫板 Base plate 30x6x1866	1	SA/GB713 Q345R		0.64	
8	ZL-A-24020.9	2:椭圆封头 2:Ellipsoidal Head ID.600x6(min5.4)	2	SA/GB713 Q345R	20.4	40.8	
7	ZL-A-24020.10	凸缘 Flange DN100	2	SA-105M	8.5	17	a,b
6	ASME B16.21-2021	垫片 Shim S=3mm	1	PTFE		/	
5	ZL-A-24020.11	螺母 Nut 5/8-11UNC-2B	4	SA-194M Gr.2H	0.034	0.136	
4	ZL-A-24020.12	螺栓 Hex Bolts 5/8-11UNC-2A; L=65	4	SA-193M Gr.B7	0.11	0.44	
3	ZL-A-24020.13	接管 Nozzle OD.60.3x5.54	2	SA-106M Gr.B	0.6	1.2	c,d
2	ASME B16.5-2020	法兰盖 Blind flange DN50-150#RF	2	SA-105M	1.82	3.64	
1	ASME B16.5-2020	法兰 Flange SO50-150#RF	2	SA-105M	2.2	4.4	
序号 NO.	代号 Dwg.No./Standard	名称及规格 Name And Specifications	数量 Q'ty	材料 Material	单件重量 Unit Weight	总重量 Total Weight	备注 Note
3							
2							
1							
0							
版次 REV.	说明 DESCRIPTION	设计 PREPARED	日期 DATA	审核 REVIEWED	日期 DATA	批准 APPROVED	日期 DATA
台州市众力化工设备制造有限公司 Taizhou Zhongli Chemical Equipment Manufacturing Co., Ltd.				项目 PROJ.			
图纸名称 DWGING NAME	吸附筒 ADSORPTION CARTRIDGES		产品编号 Product.NO.	第 1 页 共 8 页 1 OF 8	比例 SCALE	1:8	图幅 SIZE A1
			图号 DRAWING NO.	ZL-A-24020.0	版次 REV.	0	




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00940
VERIFICATION NO.
TARIKH: 11/08/2025
DATE

WHOLE 12.5
全部

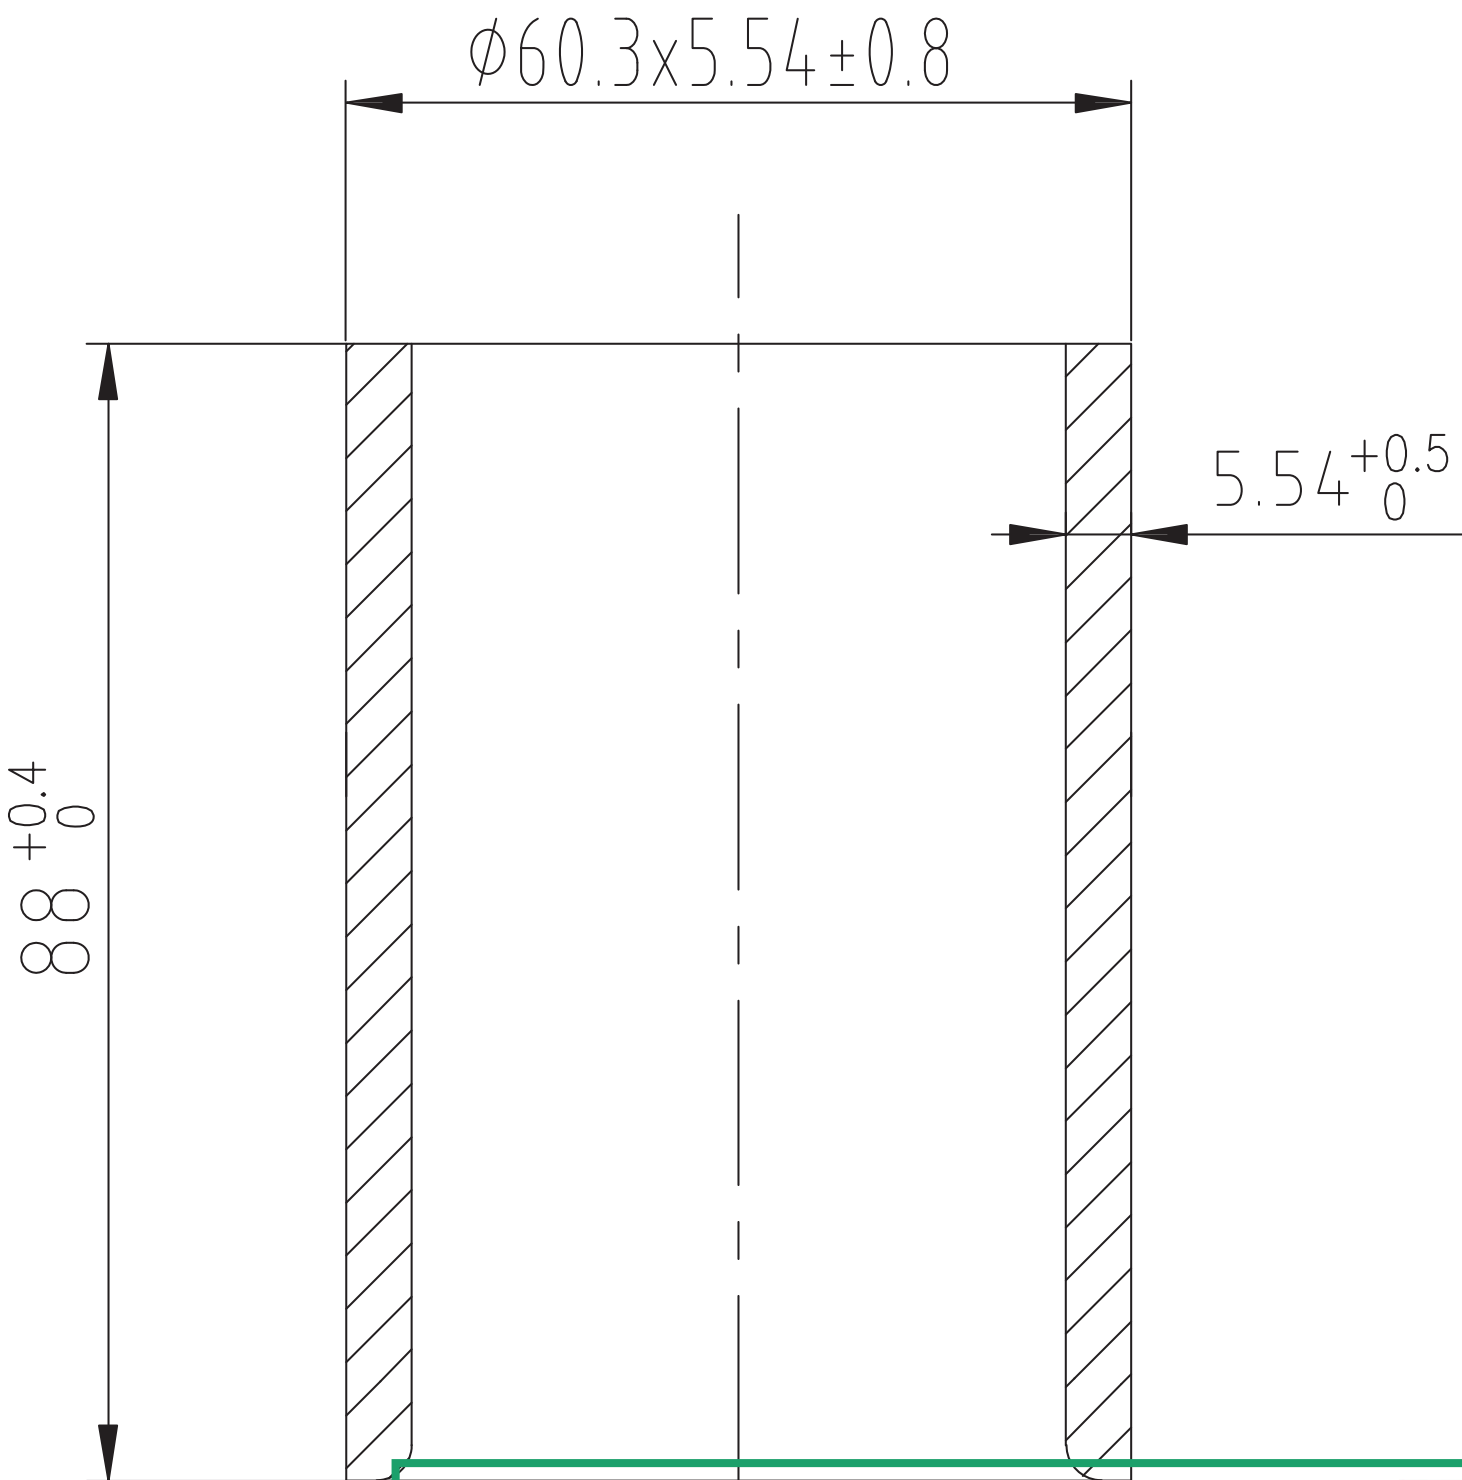

APPROVED

LRQA

This document has been examined and given the status as shown in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12

Date: 28 October 2024 Initials: WL

Office: Shanghai Design Appraisal Cent

LRQA Verification Limited

A member of the LRQA Group Limited

LRQA007 11.2021

NOTES:

1.接管的材料要完全符合 SA-106M Gr.B 的要求。

MATERIAL OF THE NOZZLE SHALL COMPLY WITH THE REQUIREMENTS DEFINED IN SA-106M Gr.B .

2.接管内边缘应倒角或倒圆。

INSIDE EDGES SHALL BE CHAMFERED OR ROUNDED.

3	接管 Nozzle OD.60.3x5.54	SA-106M Gr.B	0.6	/	ZL-A-24020.1	ZL-A-24020.0
件号 P.N.	名称 NAME	材料 MATERIAL	重量(kg) WGT.	比例 SCALE	所在图号 DWG.NO.	装配图号 ASSEM.DW
3						
2						
1						
0						
版次 REV.	说明 DESCRIPTION	设计 PREPARED	日期 DATA	审核 REVIEWED	日期 DATA	批准 APPROVED
台州市众力化工设备制造有限公司 Taizhou Zhongli Chemical Equipment Manufacturing Co., Ltd.			项目 PROJ.			
图纸名称 DWGING NAME	零部件图一 Part 1	产品编号 Product.NO	第2页 共8页 2 OF 8	比例 SCALE	1:1	图幅 SIZE
		图号 DRAWING NO.	ZL-A-24020.1	版次 REV.	0	A4



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




Verifikasi Dokumen
Document Verification

NO. VERIFIKASI:
VERIFICATION NO.

JKKP/2025/01-05/T-01/00940

TARIKH:
DATE

11/08/2025

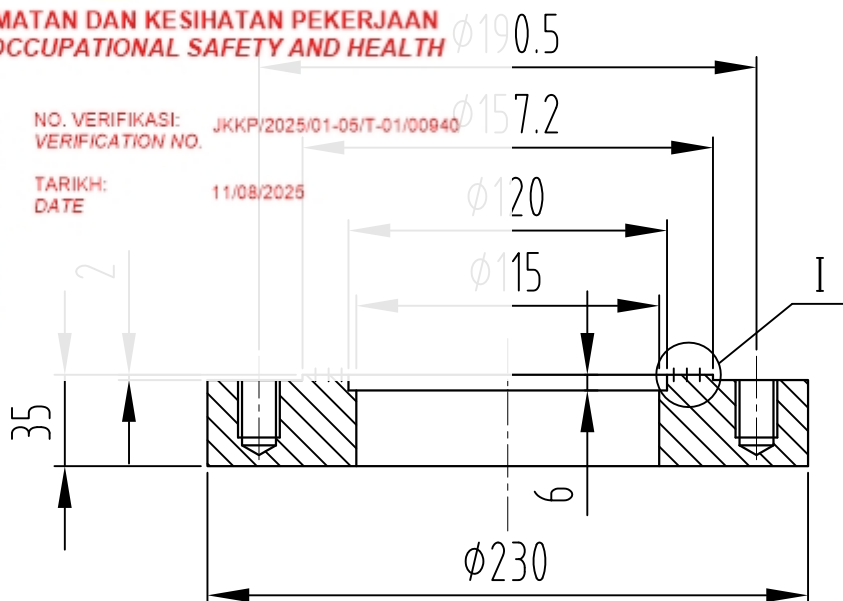

8-M16, h=22

APPROVED

LRQA

This document has been examined and given the status as shown in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12


Date: 28 December 2024 Initials: WL

Office: Shanghai Design Appraisal Center

LRQA Verification Limited



A member of the LRQA Group Limited

LRQA007 11.2021



7	凸缘 Flange	DN100	SA-105M	8.5	/	ZL-A-24020.2	ZL-A-24020.0
件号 P.N.	名称 NAME	材料 MATERIAL	重量 (Kg) WGT.	比例 SCALE	所在图号 DWG. NO.	装配图号 ASSEM. DW	
3							
2							
1							
0							
版次 REV.	说明 DESCRIPTION	设计 PREPARED	日期 DATA	审核 REVIEWED	日期 DATA	批准 APPROVED	日期 DAT
台州市众力化工设备制造有限公司 Taizhou Zhongli Chemical Equipment Manufacturing Co., Ltd.			项目 PROJ.				
图纸名称 DWGING NAME	零部件图二 Part 2	产品编号 ProductNO.	第3 页共8 页 3 OF 8	比例 SCALE	1:2	图幅 SIZE	A4
		图号 DRAWING NO.	ZL-A-24020.2			版次 REV.	0

冲压成型后的最小厚度 5.4

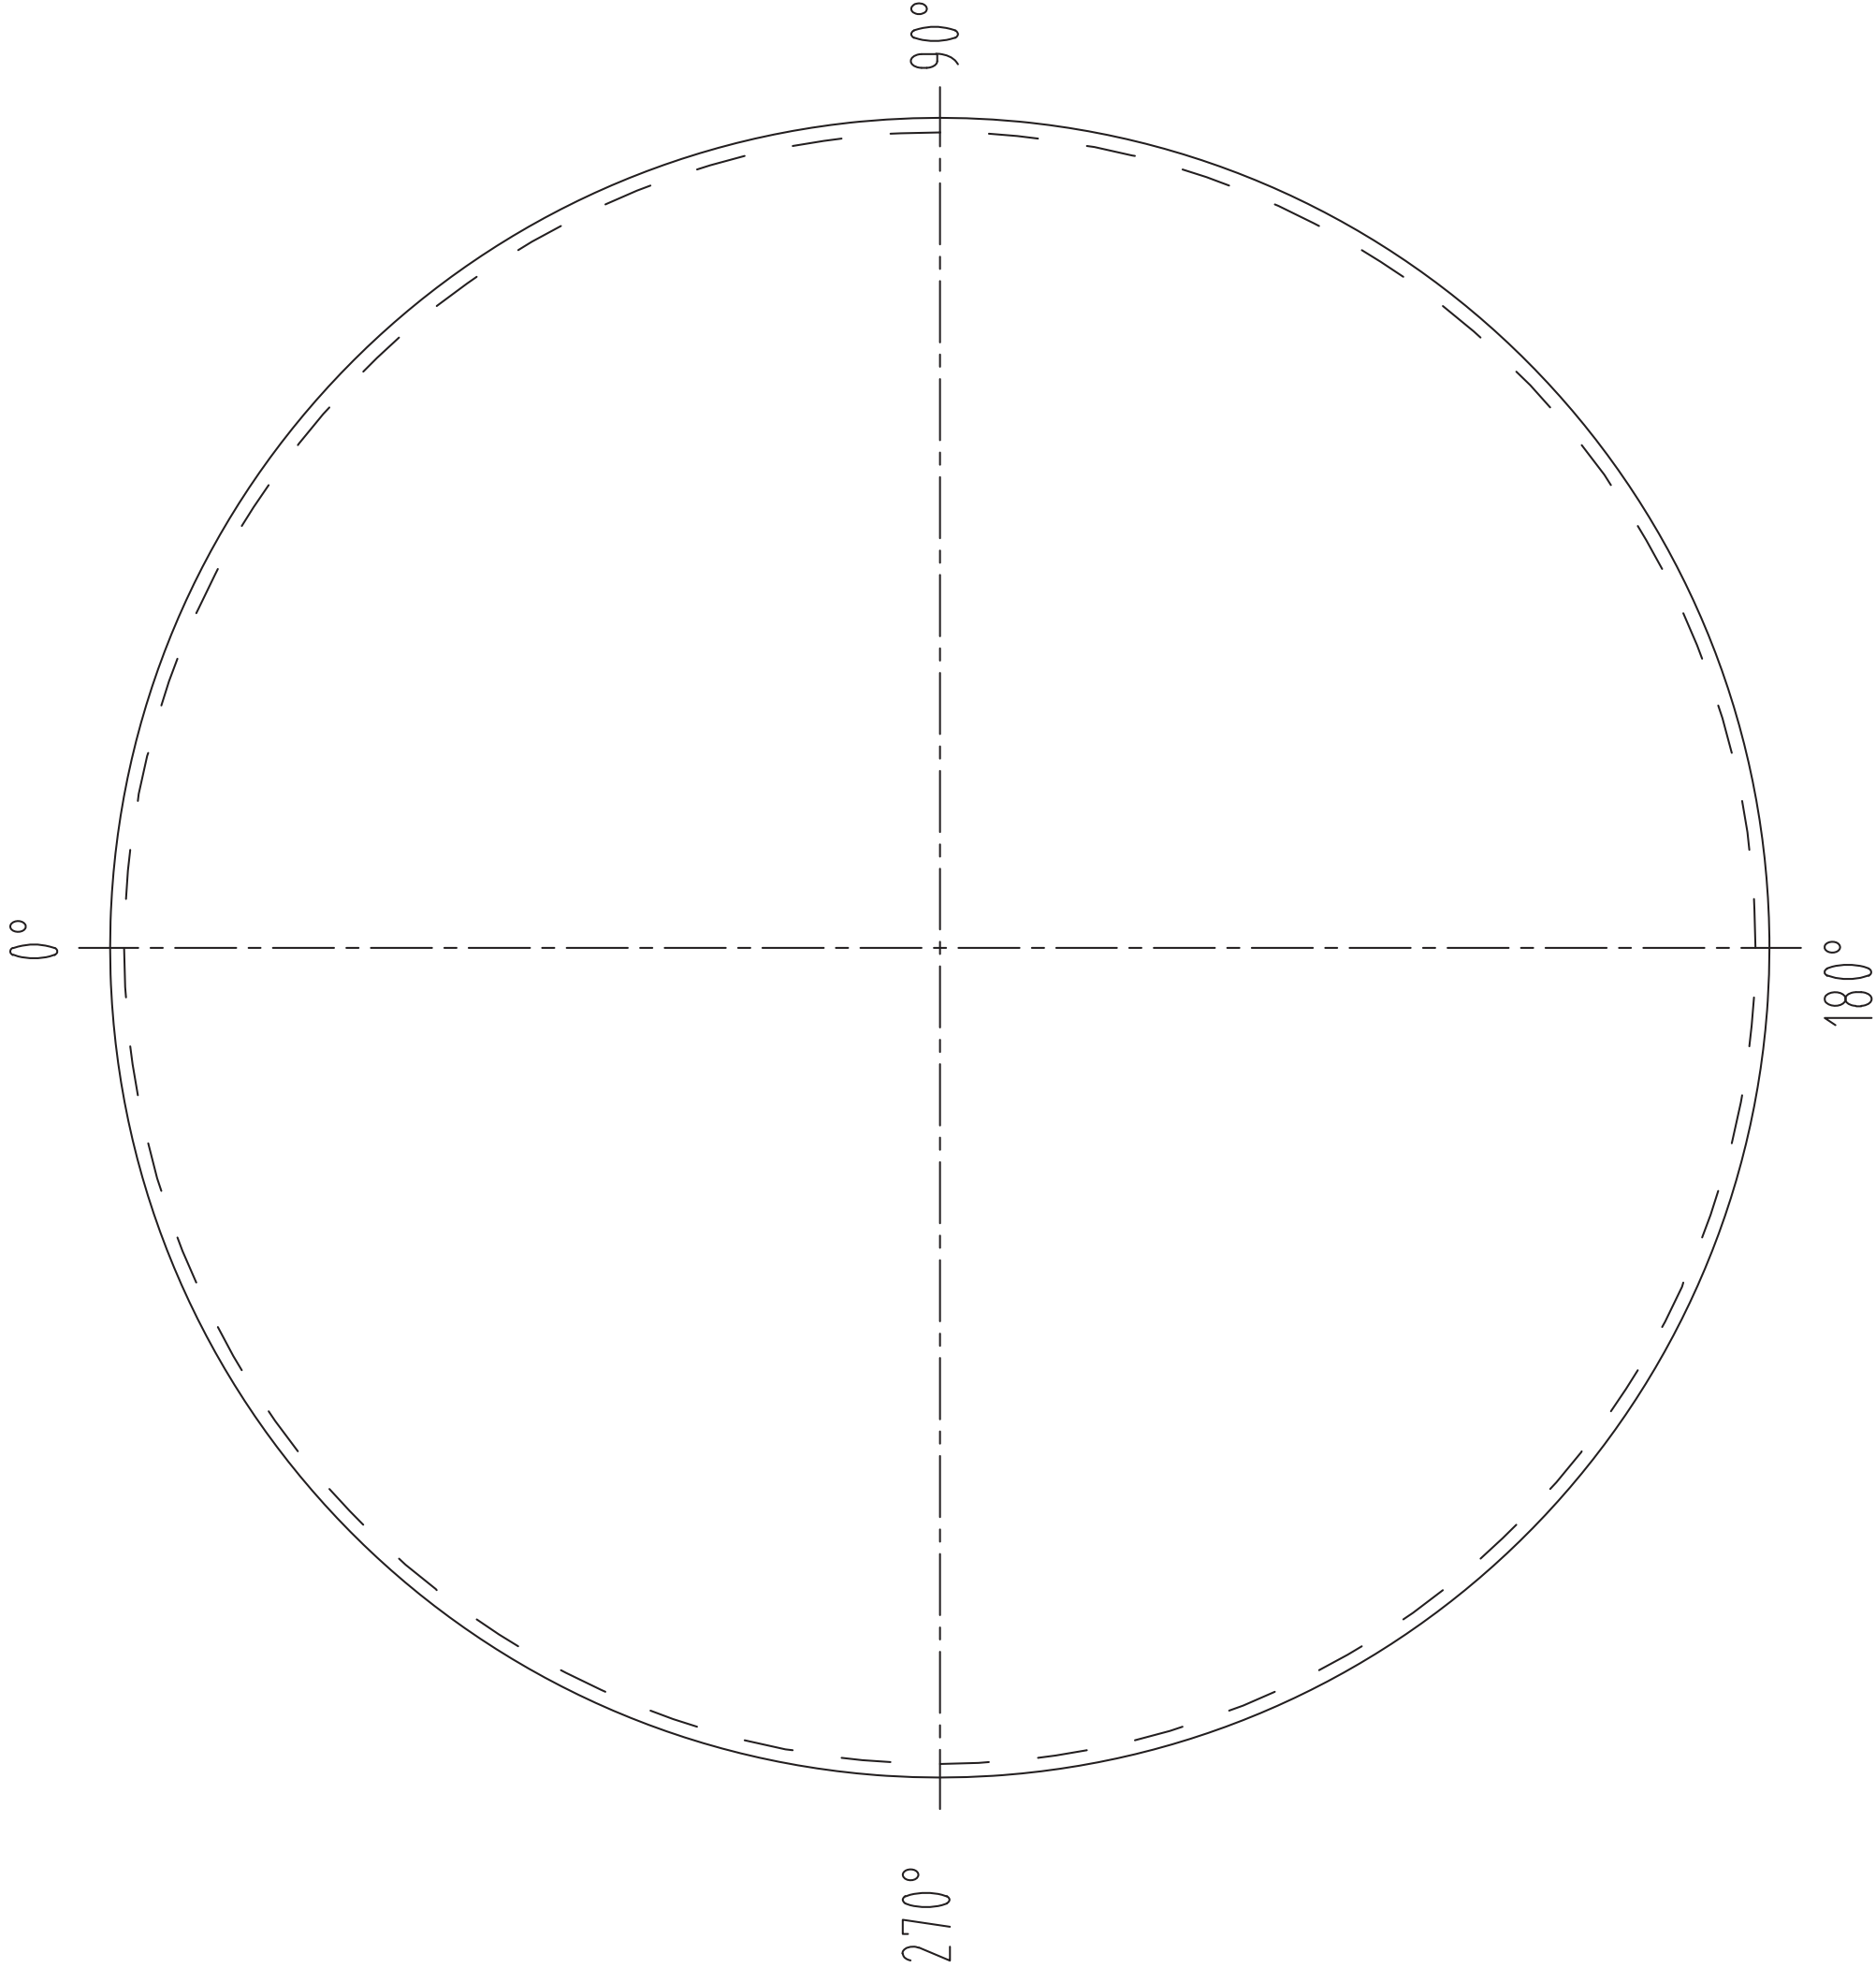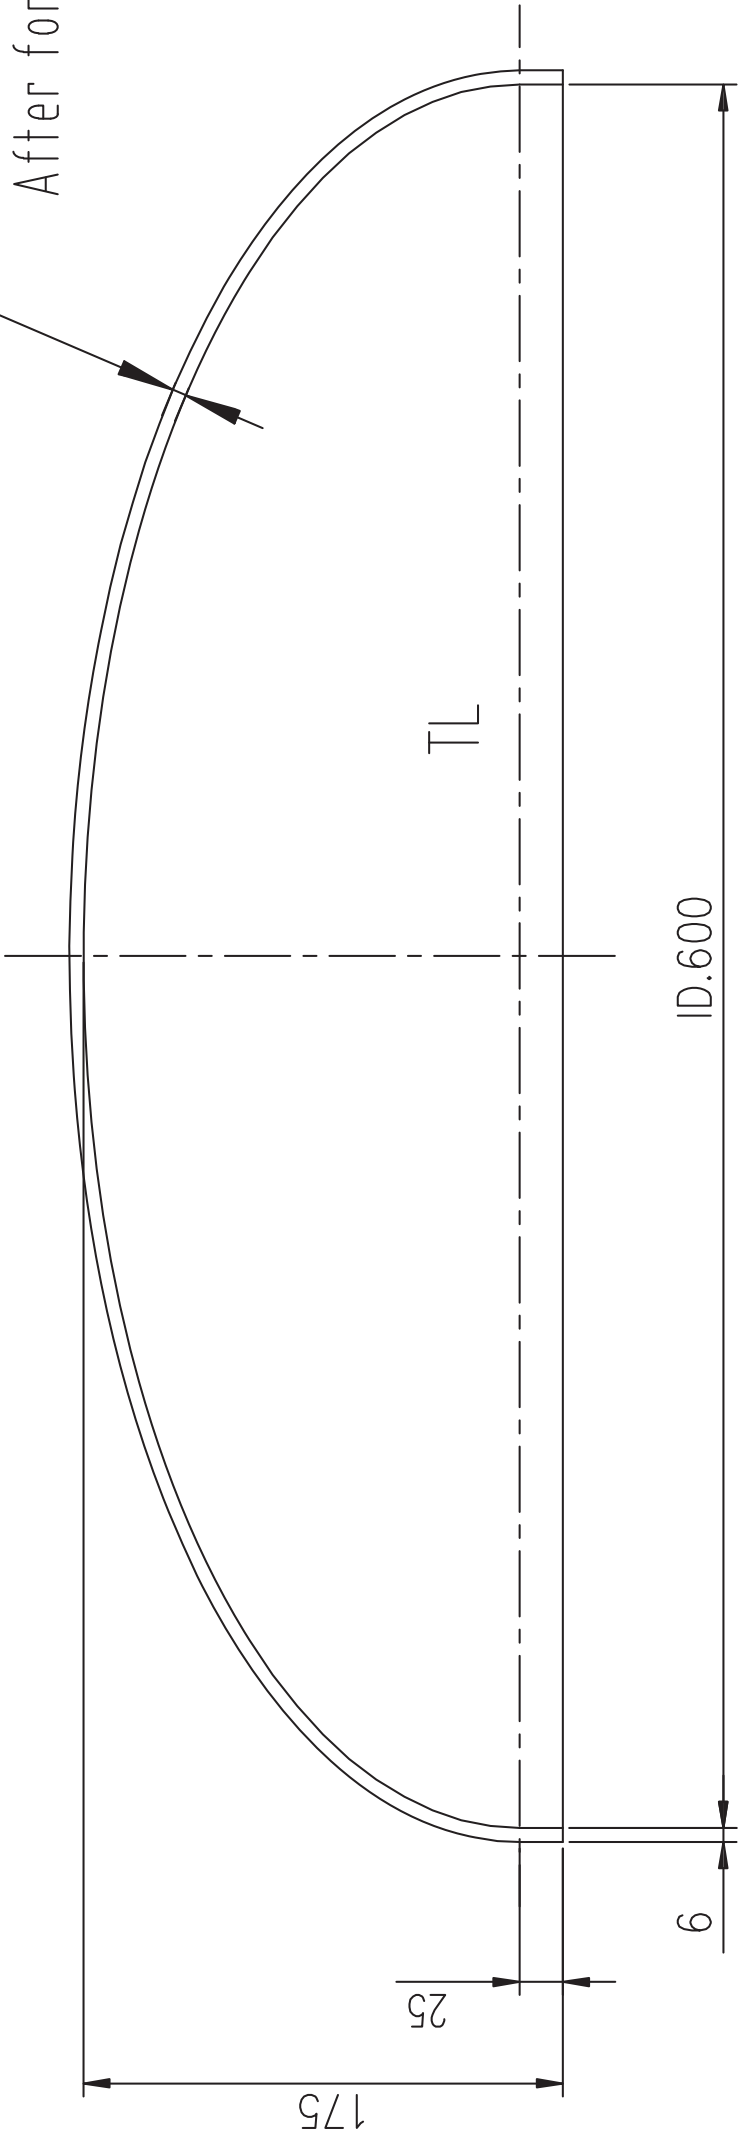

技术要求:

- 封头制做时与样板间的偏差按UG-81规定，向外凸不得大于7.5 mm,向内凹不得大于3.75 mm。
- 封头的直边按UG-80的规定，应有足够的圆度,使最大及最小内径之差不得超过 6 mm。
- 封头应冷成型，不需要热处理。
- 图纸中表示长度的单位均为mm。

TECHNICAL SPECIFICATION

- According to UG-81, the inner surface of the head shall not deviate outside of the specifid shape by more than 7.5 mm nor inside the specified shape by morethan 3.75 mm
- According to UG-80 the skirts of heads shall be sufficiently true to round so that the difference between the maximum and minimum inside diameters shall not exceed 6 mm.
- The head shall be cold formed ,not need heat treatment
- The unit of length in drawing is mm.

APPROVED

LRQA

This document has been examined and given the status as shown in the Design Appraisal Document (DAD) number below:
DAD Number: SDAC/2490271-12
Date: 28 October 2024 Initials: WL
Office: Shanghai Design Appraisal Centi
LRQA Verification Limited
A member of the LRQA Group Limited



8	2:椭圆封头 2:ELLIPSOIDAL HEAD	SA/GB713 Q345R	20.4	/	ZL-A-24020.3	ZL-A-24020.0
件号 P.N.	名 称 NAME	材 料 MATERIAL	重量 (Kg) WGT.	比例 SCALE	所在图号 DWG. NO.	装配图号 ASSEM. DW
3						
2						
1						
0						
版次 REV.	说 明 DESCRIPTION	设 计 PREPARED	日 期 DATA	审 核 REVIEWED	日 期 DATA	批 准 APPROVED
台州市众力化工设备制造有限公司 Taizhou Zhongji Chemical Equipment Manufacturing Co., Ltd.		项 目 PROJ.				
图样名称 DWGING NAME	零部件图三 Part 3	产品编号 Product NO.	第4页共8页 4 OF 8		比 例 SCALE	图 幅 SIZE
		图 号 DRAWING NO.	ZL-A-24020.3		版次 REV.	A3
				ZL-A-24020.3		0




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00940
VERIFICATION NO.
TARIKH: 11/08/2025
DATE

WHOLE 12.5
全部

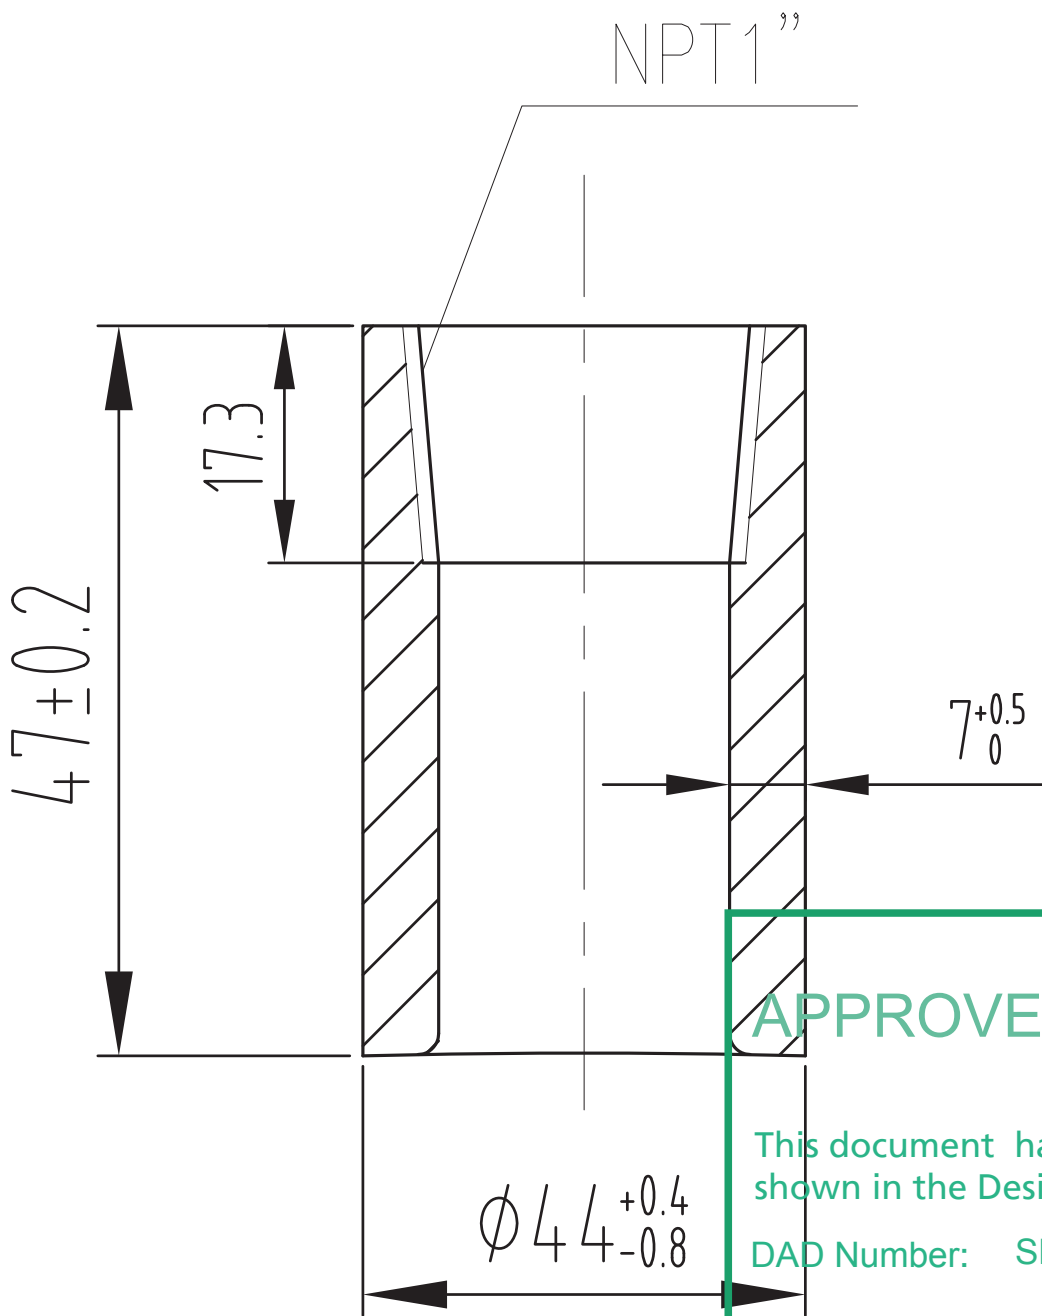

APPROVED

This document has been examined and given the status as shown in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12

Date: 28 October 2024 Initials: WL

Office: Shanghai Design Appraisal Cent

LRQA Verification Limited

A member of the LRQA Group Limited

NOTES:

1. 除非另有说明，未注明的装配公差按HG/T20584-2020中的规定，机加工零件的未注公差按GB/T1804-2014的M级执行。
UNLESS OTHERWISE SPECIFIED,TEH UNSPECIFIED TOLERANCE FOR ASSEMBLING SHALL COMPLY WITH HG/T20584-2020 ,TEH UNSPECIFIED TOLERANCE FOR FABRICATION SHALL COMPLY WITH CLASS M OF GB/T 1804-2014.
- 2.接管的材料要完全符合SA-105M 的要求。
MATERIAL OF THE NOZZLE SHALL COMPLY WITH THE REQUIREMENTS DEFINED IN SA-105M.
- 3.接管内边缘应倒角或倒圆。
INSIDE EDGES SHALL BE CHAMFERED OR ROUNDED.
- 4.螺纹按ASME B16.11-2021标准NPT1”-3000#加工。
THREAD SHALL BE PROCESSED PER ASME B16.11-2021 STANDARD NPT1”-3000#.


14	束结 Half-Coupling	NPT1"-3000#	SA-105M	0.28	/	ZL-A-24020.4	ZL-A-24020.0		
件 号 P.N.	名 称 NAME		材 料 MATERIAL	重量(kg) WGT.	比 例 SCALE	所在图号 DWG.NO.	装配图号 ASSEM.DW		
3									
2									
1									
0									
版 次 REV.	说 明 DESCRIPTION		设 计 PREPARED	日 期 DATA	审 核 REVIEWED	日 期 DATA	批 准 APPROVED	日 期 DATA	
台州市众力化工设备制造有限公司 Taizhou Zhongli Chemical Equipment Manufacturing Co., Ltd.			项 目 PROJ.						
图纸名称 DWGING NAME	零部件图四 Part 4		产品编号 Product.NO	第5页 共8页 5 OF 8		比 例 SCALE	1:1	图 幅 SIZE	A4
				图 号 DRAWING NO.					



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00940
VERIFICATION NO.
TARIKH: 11/08/2025
DATE

WHOLE 12.5
全部

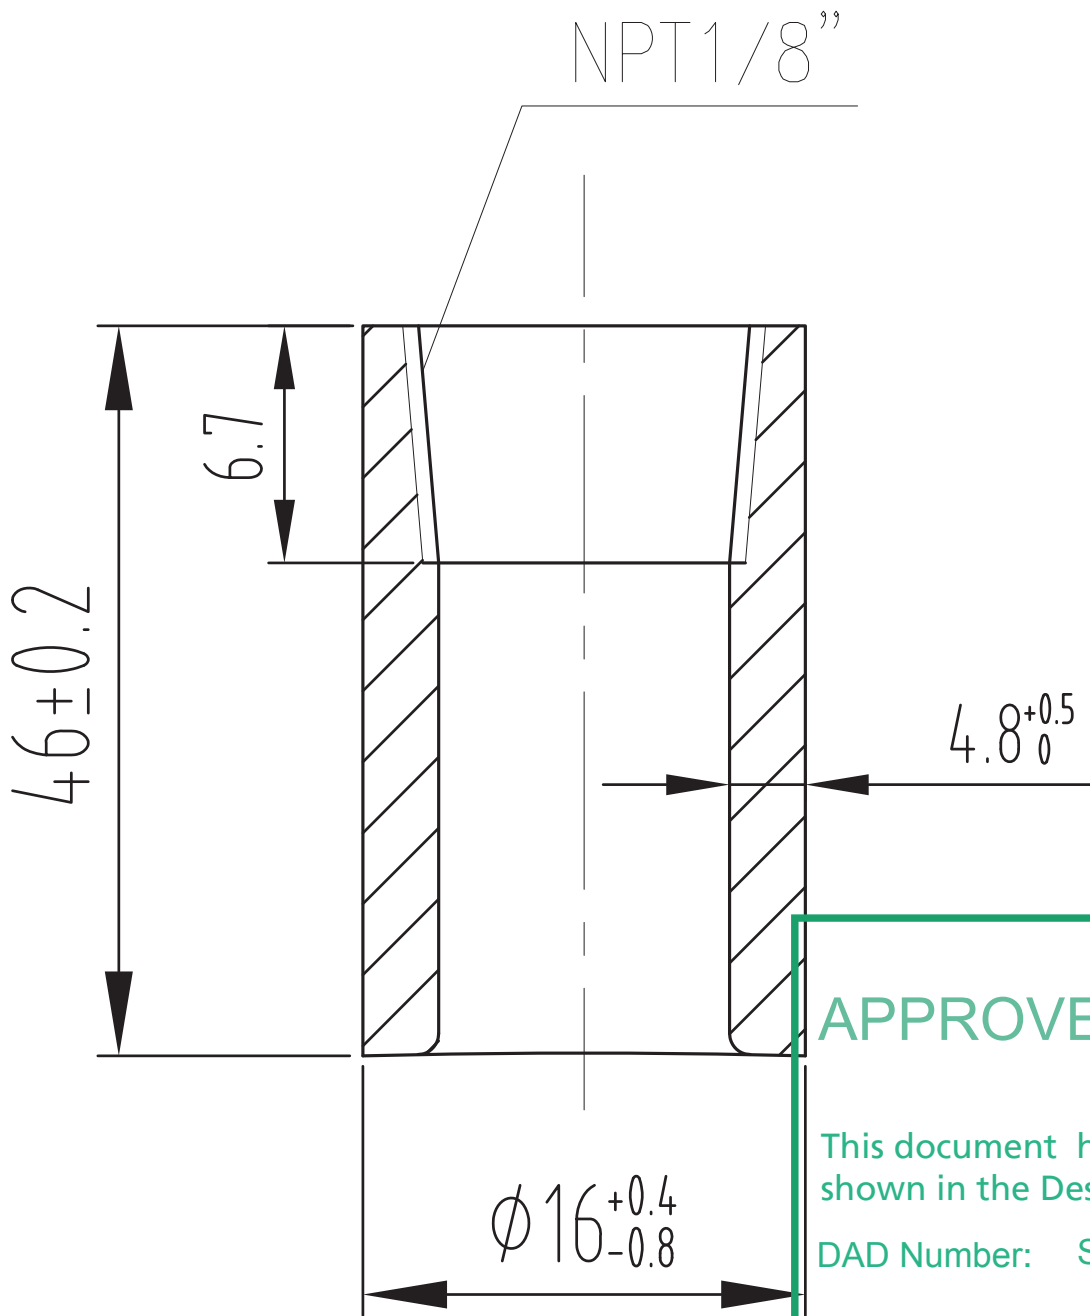

APPROVED

LRQA

This document has been examined and given the status as shown in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12

Date: 28 October 2024 Initials: WL

Office: Shanghai Design Appraisal Cent

LRQA Verification Limited

A member of the LRQA Group Limited

NOTES:


1. 除非另有说明，未注明的装配公差按HG/T20584-2020中的规定，机加工零件的未注公差按GB/T1804-2014的M级执行。
UNLESS OTHERWISE SPECIFIED,TEH UNSPECIFIED TOLERANCE FOR ASSEMBLING SHALL COMPLY WITH HG/T20584-2020 ,TEH UNSPECIFIED TOLERANCE FOR FABRICATION SHALL COMPLY WITH CLASS M OF GB/T 1804-2014.
- 2.接管的材料要完全符合SA-105M 的要求。
MATERIAL OF THE NOZZLE SHALL COMPLY WITH THE REQUIREMENTS DEFINED IN SA-105M.
- 3.接管内边缘应倒角或倒圆。
INSIDE EDGES SHALL BE CHAMFERED OR ROUNDED.
- 4.螺纹按ASME B16.11-2021标准NPT1/8”-3000#加工。
THREAD SHALL BE PROCESSED PER ASME B16.11-2021 STANDARD NPT1/2”-3000#.

15	接管 Nozzle	NPT1/8"-3000#	SA-105M	0.1	/	ZL-A-24020.5	ZL-A-24020.0		
件 号 P.N.	名 称 NAME		材 料 MATERIAL	重量(kg) WGT.	比 例 SCALE	所在图号 DWG.NO.	装配图号 ASSEM.DW		
3									
2									
1									
0									
版 次 REV.	说 明 DESCRIPTION		设 计 PREPARED	日 期 DATA	审 核 REVIEWED	日 期 DATA	批 准 APPROVED	日 期 DATA	
台州市众力化工设备制造有限公司 Taizhou Zhongli Chemical Equipment Manufacturing Co., Ltd.			项 目 PROJ.						
图纸名称 DWGING NAME	零 部 件 图 五 Part 5		产 品 编 号 Product.NO		第6页 共8页 6 OF 8	比 例 SCALE	1:1	图 幅 SIZE	A4
			图 号 DRAWING NO.	ZL-A-24020.5			版 次 REV.	0	



Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00940
VERIFICATION NO.
TARIKH: 11/08/2025
DATE

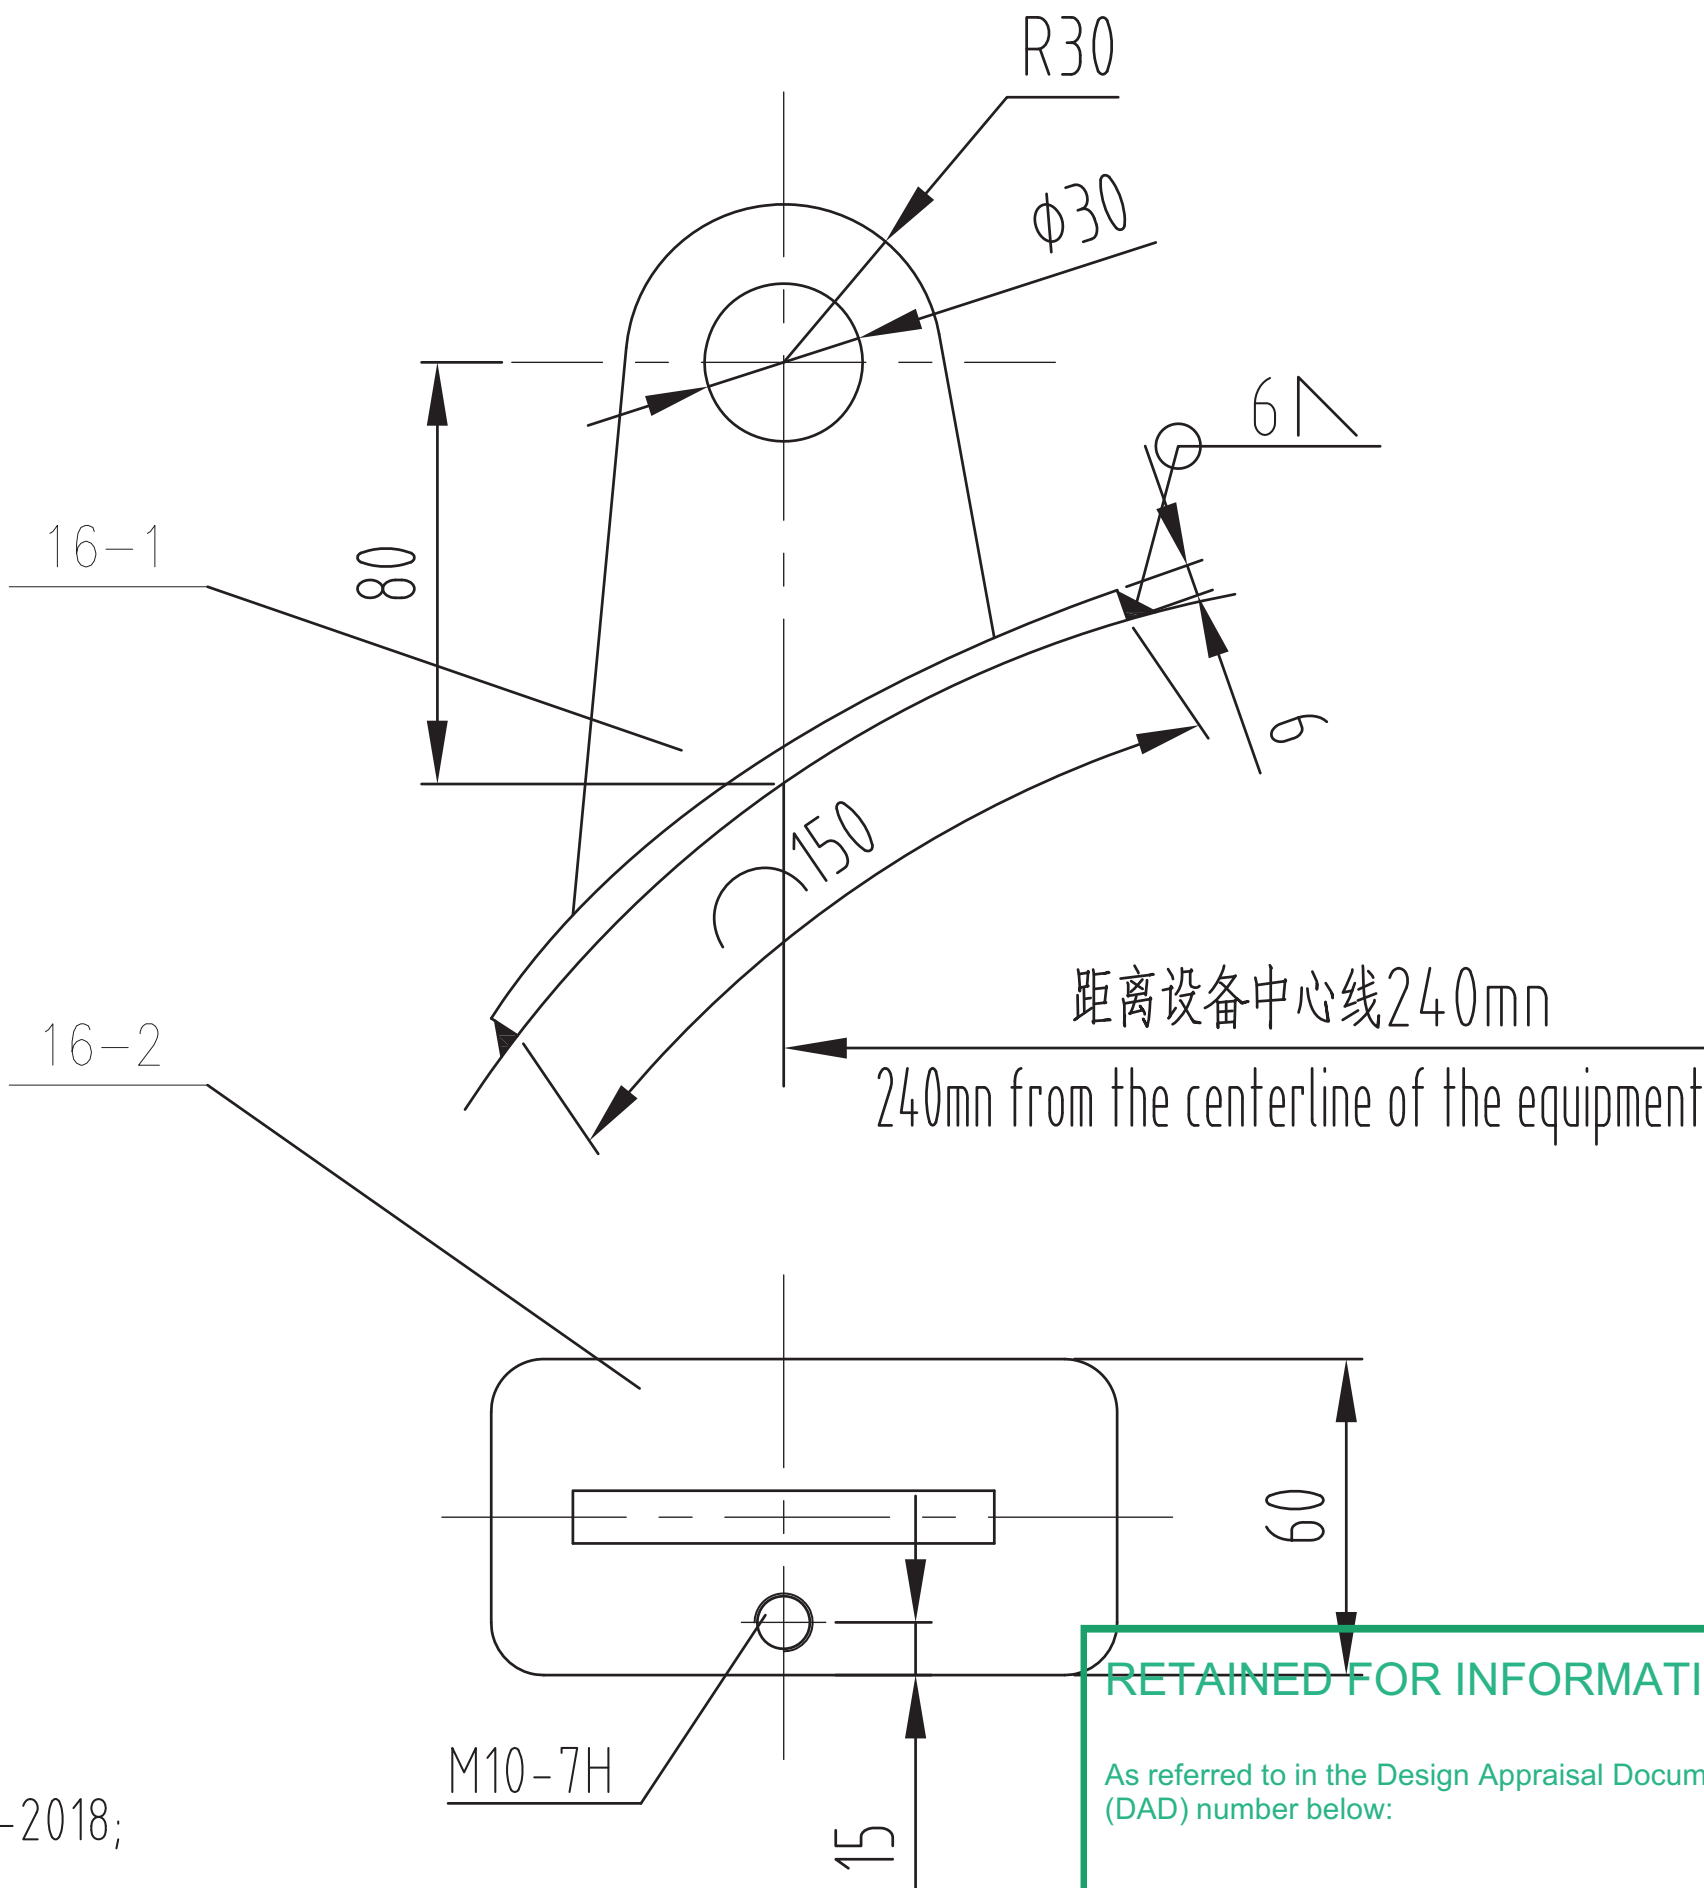

技术要求:

- 1 制造要求按HG/T 21574-2018;
- 2 图纸中表示长度的单位均为mm.

TECHNICAL SPECIFICATION:

- 1 Manufacturing requirements shall be in accordance with HG/T 21574-2018.
- 2 The unit of length in drawing is mm .

RETAINED FOR INFORMATION

As referred to in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12

Date: 28 October 2024

Office: Shanghai Design Appraisal Centre

LRQA Verification Limited

A member of the LRQA Group Limited

Initials: WL

LRQA

LRQA002 11.2021

16-2	THIS DWG	垫板 PAD	60x150x6	1	SA/GB713 Q345R		0.42			
16-1	THIS DWG	吊耳 LIFTING LUG	S=10	1	SA/GB713 Q345R		0.5			
件 号 P.N.	图号或标准号 DWG NO. OR STD.	名 称 NAME	数量 QTY.	材 料 MATERIAL	单 SIN.	总 TOT.	备 注 REMARKS			
					重量 WT(Kg)					
16	吊耳 LIFTING LUGS		SA/GB713 Q345R	0.92	/	ZL-A-24020.6		ZL-A-24020.0		
件 号 P.N.	名 称 NAME		材 料 MATERIAL	重量 (Kg) WGT.	比例 SCALE	所在图号 DWG. NO.		装配图号 ASSEM. DW		
3										
2										
1										
0										
版 次 REV.	说 明 DESCRIPTION			设 计 PREPARED	日 期 DATA	审 核 REVIEWED	日 期 DATA	批 准 APPROVED	日 美 DAT	
台州市众力化工设备制造有限公司 Taizhou Zhongli Chemical Equipment Manufacturing Co., Ltd.				项 目 PROJ.						
图纸名称 DWGING NAME	零 部 件 图 六 Part 6			产 品 编 号 ProductNO.	第7页 共8 页 7 OF 8		比 例 SCALE	1:2	图 幅 SIZE	A4
				图 号 DRAWING NO.	ZL-A-24020.6				版 次 REV.	0




NO. VERIFIKASI: JKKP/2025/01-05/T-01/00940
VERIFICATION NO.

TARIKH: 11/08/2025
DATE

The detail of Name plate

NO SCALE

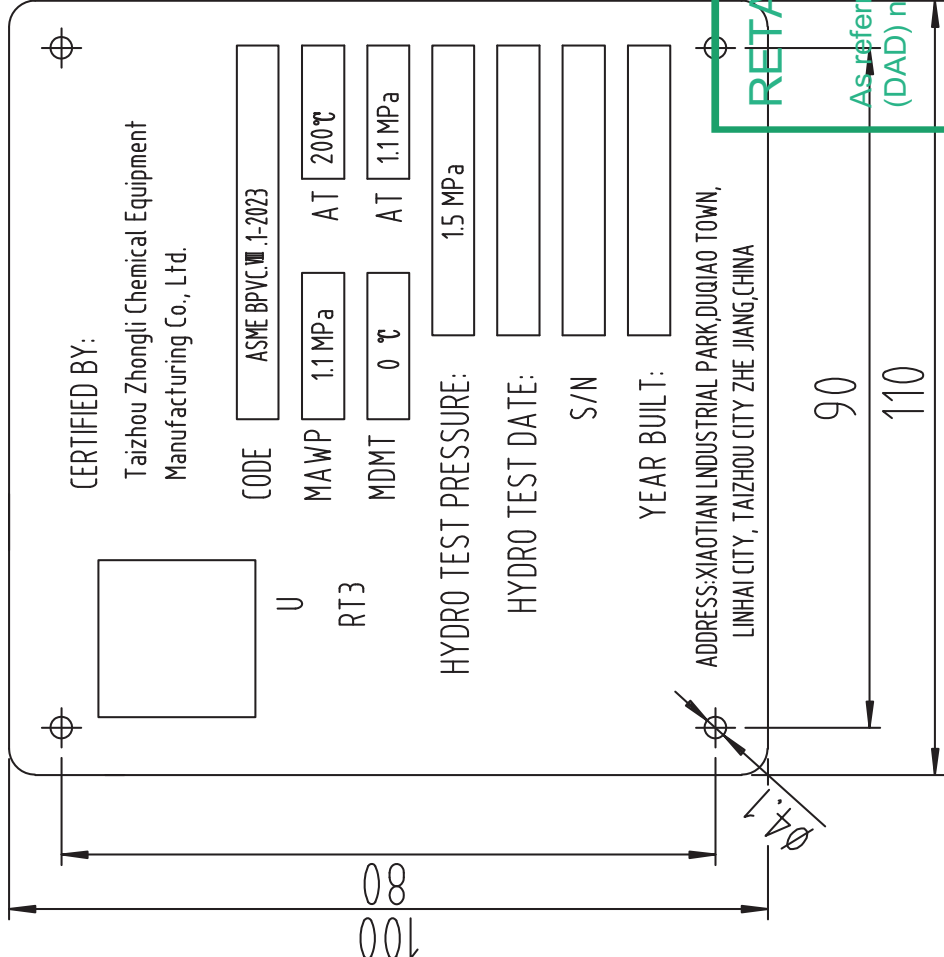

RETAINED FOR INFORMATION

As referred to in the Design Appraisal Document (DAD) number below:

DAD Number: SDAC/2490271-12

Date: 28 October 2024



Initials: WL

Office: Shanghai Design Appraisal Centre

LRQA Verification Limited

A member of the LRQA Group Limited

13-3	GB/T 12615.1-2004	铆钉 RIVET 4x14.5	LROA002 11 2021	4	Aluminium		A member of the LKGA Group Limited		
13-2		铭牌架 BRACKET		1	SA/GB713 Q345R	2.6			
13-1		铭牌 NAME PLATE		1	Aluminium	0.2	$\delta=1$		
件号 P.N.	图号或标准号 DWG NO. OR STD.	名 称 NAME		数量 QTY.	材 料 MATERIAL	单 SIN.	总 TOT.	备 注 REMARKS	
13	铭牌和托架 NAME PLATE & BRACKET	组合作 COMPONENT		2.8	1:2	ZL-A-24020.7		ZL-A-24020.0	
件号 P.N.	名 称 NAME	材 料 MATERIAL		重量 (Kg) WGT.	比例 SCALE	所在图号 DWG. NO		装配图号 ASSEM. DWG.	

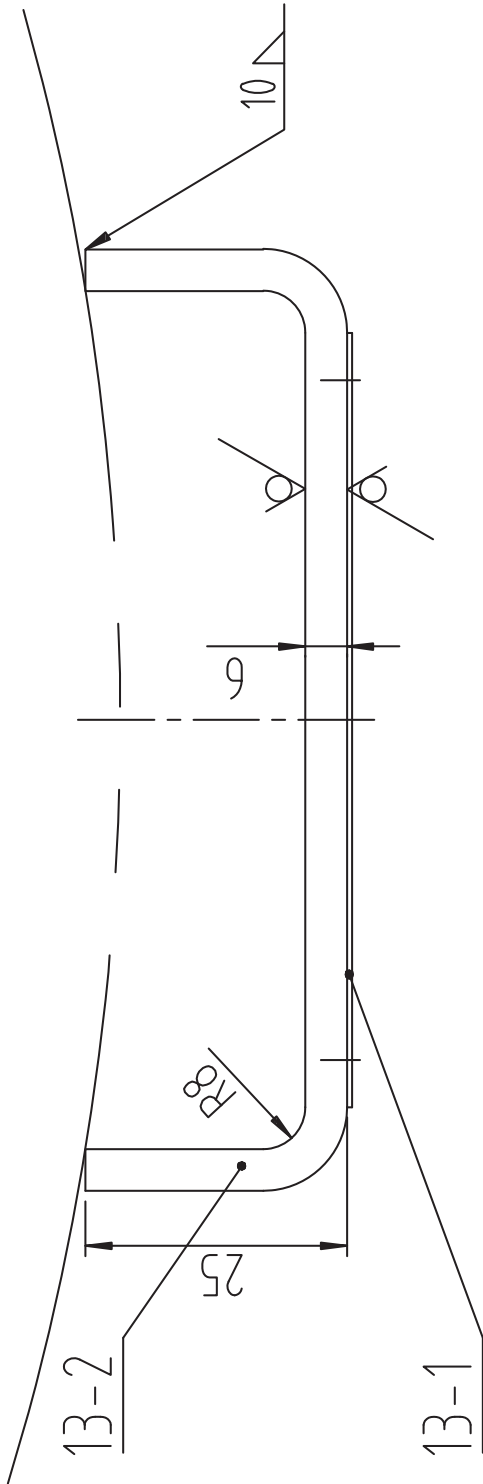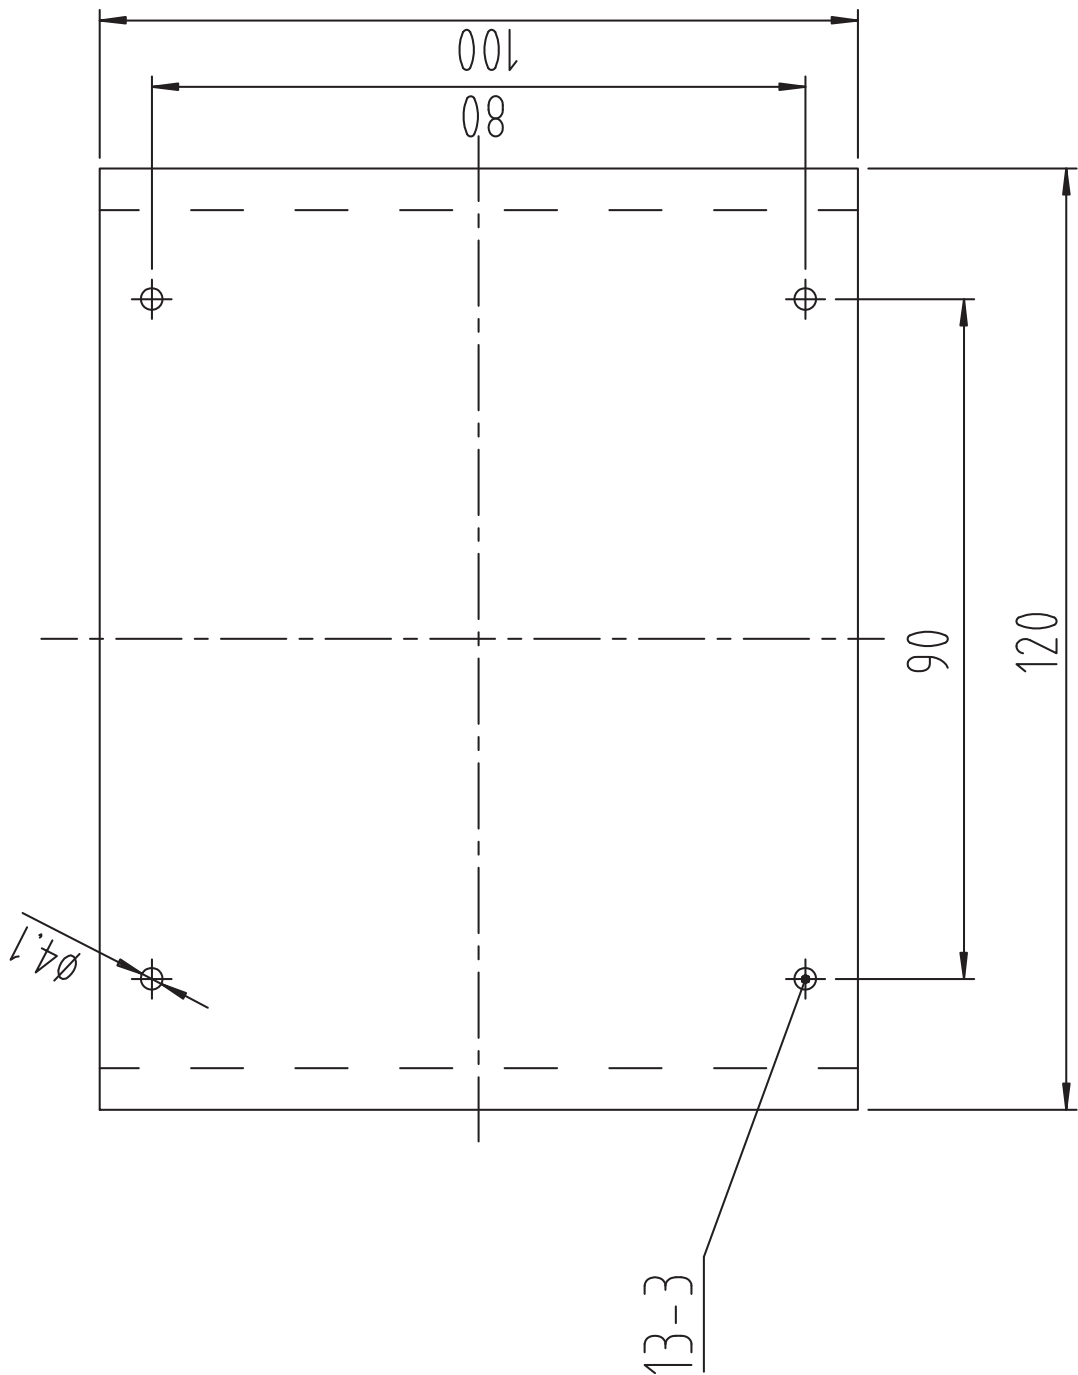

技术要求:

1. 铭牌的底面应磨砂, 不涂漆;
2. 铭牌四周和矩形区域应凸起并抛光;
3. ASME规范标志和制造厂系列号及制造年份由TZZL, 应打钢印;
4. 铭牌上字符大小至少4mm高, 字符应该凸出或者凹下至少0.1mm并且清晰便于识别;
5. 图纸中表示长度的单位均为mm。

TECHNICAL SPECIFICATION:

1. The base surface of nameplate shall be dulled and unpainted;
2. The border of nameplate and rectangular area shall be raised and polished;
3. ASME Certification Mark and Manufacturer's serial No. and Year Built shall be stamped by TZL ;
4. Size of characters shall be at least 4mm high for nameplate. Characters shall be either indented or raised for at least 0.1mm and shall be legible and readable;
5. The unit of length in drawing is mm .