


[illegible]



L. Fran
witnessed
2014. 6.18

[illegible]

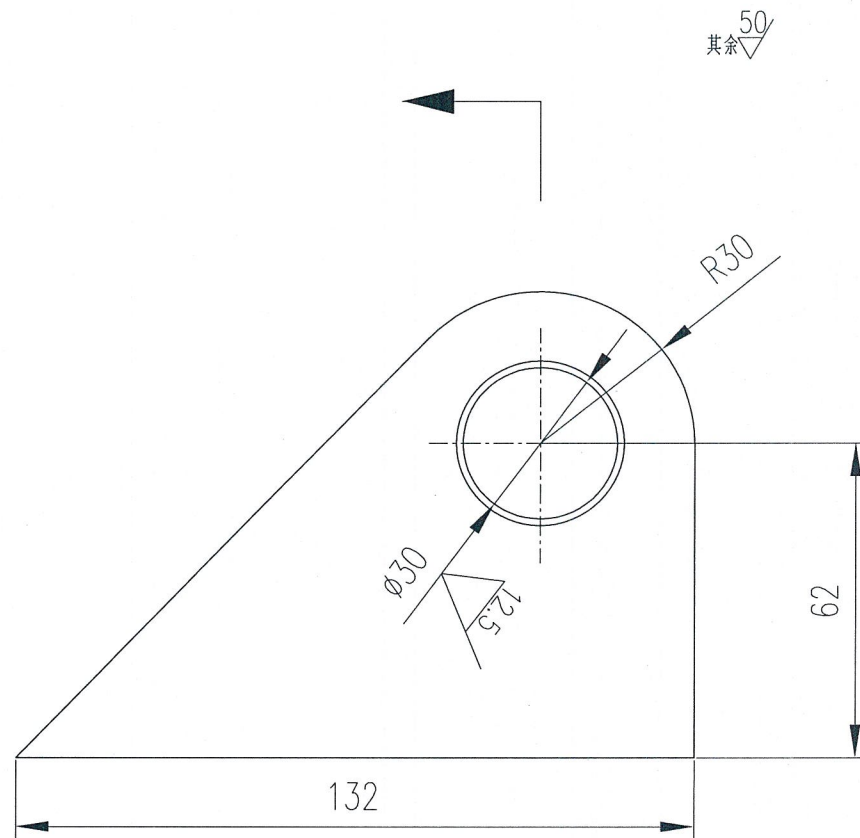


JABATAN KESELAMATAN DAN KESEHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-06/T-01/00617
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

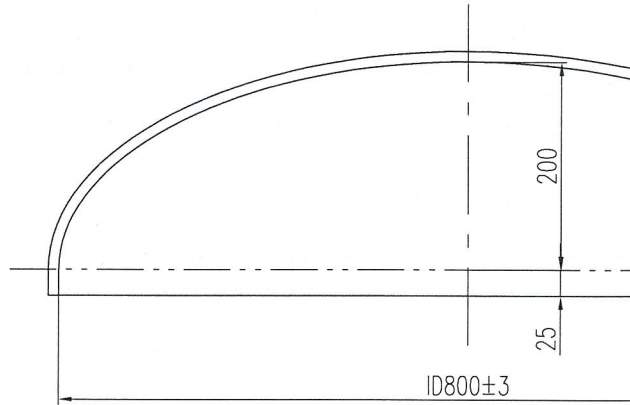

封头坡口形式
GROOVE OF HEAD

不按比例 NO SCALE



技术要求
GENERAL REQUIRES

- 封头成形后的最小厚度不得小于8.8mm.
THE MIN. THICKNESS AFTER FORMING IS NOT LESS THAN 10.8MM.
- 封头公差按照UG-81的规定
TOLERANCE PER UG-81.
- 封头成型后需要热处理
HEAT TREATMENT IS REQUIRED AFTER THE HEAD FORMING.

TÜVRheinland®



☐ Inspected ☒ reviewed ☐ witnessed

Xu Jia.
2024.6.18

						封头 2:1 ELLIPSOIDAL HEAD	图号: TXNX23-019-02 DWG.NO.
							共 张 第 张 PAGE: OF
标记 LABEL	处数 PLACE	分区 SUBAREA	更改文件号 NO. OF CORRECT DOCUMENT	签名 SIGNATURE	年月日 DATE		重量 WEIGHT
设计 DESIGN							数量 QTY
批准 APPROVE						SA-516M Gr.485	比例 SCALE
						REV 0	2
							1:7
							泰兴宁兴机械有限公司



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00917
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

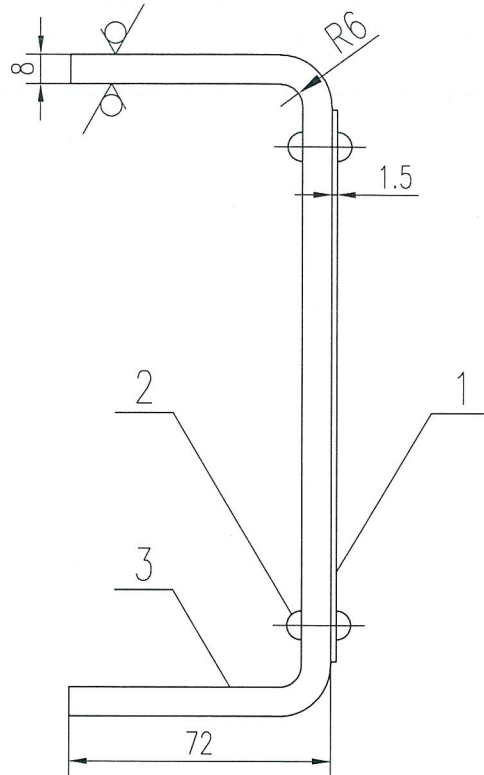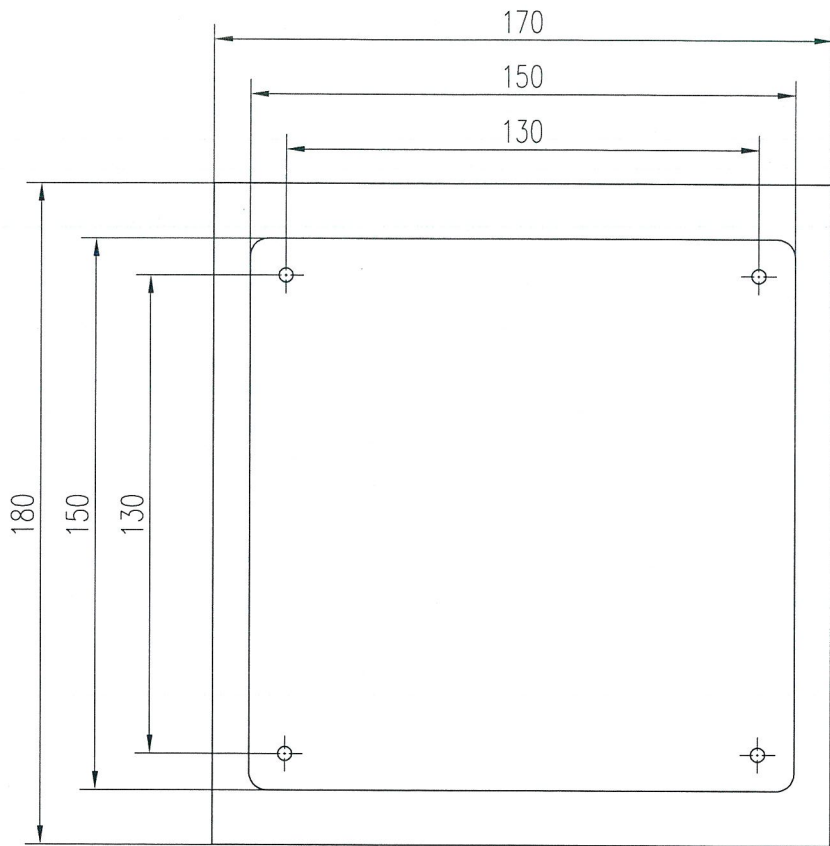

NOTES

说明

1.NAMEPLATE SHALL BE MADE OF STAINLESS STEEL WITH THICKNESS OF 1.5MM.

铭牌由1.5mm的不锈钢制造。

2.LINING, LETTERS, AND BLOCKS OF DATA SHALL BE EMBOSSED AND POLISHED, OTHER PARTS SHALL BE ENAMEL (0.1MM) DEPTH AND BLACK STOVE ENAMEL PAINTED.

铭牌上的线条,字母和数据框格凸起于板面,且抛光处理,其余部分浸蚀0.1mm深且涂以黑色瓷釉。

3.ALL THE REQUIRED MARKINGS ARE 5MM HIGH.

所有必须的标记为5mm高。

4.THE CERTIFICATION MARK SHALL BE STAMPED .

容器竣工后敲认证标记。



inspected reviewed witnessed

Lu Jian
2024.6.18


NANJING TURBINE&ELECTRIC MACHINERY GROUP TAIXING NINGXING MACHINERY CO.,LTD. No. 105, Tongjiang Road, Taixing city, Jiangsu province, China	
Vessel name or designation	AIR STORAGE TANK
Vessel serial number	
Design and manufacture code	ASME CODE SECTION VIII, DIV.1, 2023ED Factories and Machinery (Steam Boiler and Unfired Pressure Vessel) Regulations, 1970
Design pressure, MPa	1.0
Max. allowable working pressure (internal)	1.0 MPa @ 99 °C
Min. design metal temperature	-10 °C @ 1.0Mpa
Test pressure, MPa	1.85
Test date, MPa	
Year built	2024

3		BRACKET 铭牌架	1	SA-516M Gr.485		3.2	
2	GB867-86	RIVET 铆钉 4X16	4	304		0.1	
1		NAMEPLATE 铭牌 δ1.5	1	304		0.3	
NO. 件号	DWG NO. OR STD. NO. 图号或标准	PARTS. NAME 名称	QTY. 数量	MATERIAL 材料	SINGLE 单 质量MASS(kg)	TOTAL 总	REMARKS 备注
							图号: TXNX23-019-03 DWG.NO.
							共 张 第 张 PAGE: OF
							重量 WEIGHT
							数量 QTY
							比例 SCALE
							3.6 1 1:2
							SA-516M Gr.485
							REV 0
							泰兴宁兴机械有限公司


JABATAN KESELAMATAN DAN KESEHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00917
VERIFICATION NO.
TARIKH: 05/08/2025
DATE

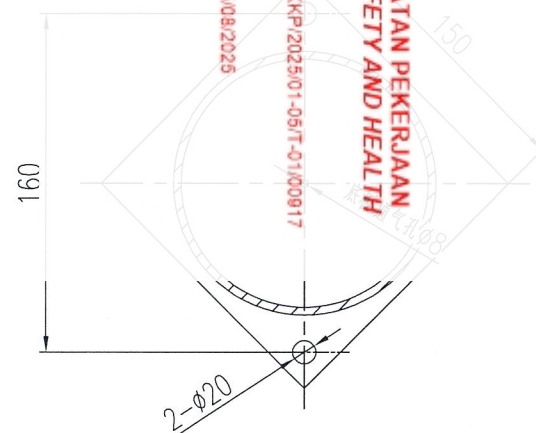☐ inspected ☒ reviewed ☐ witnessed

2024.6-18

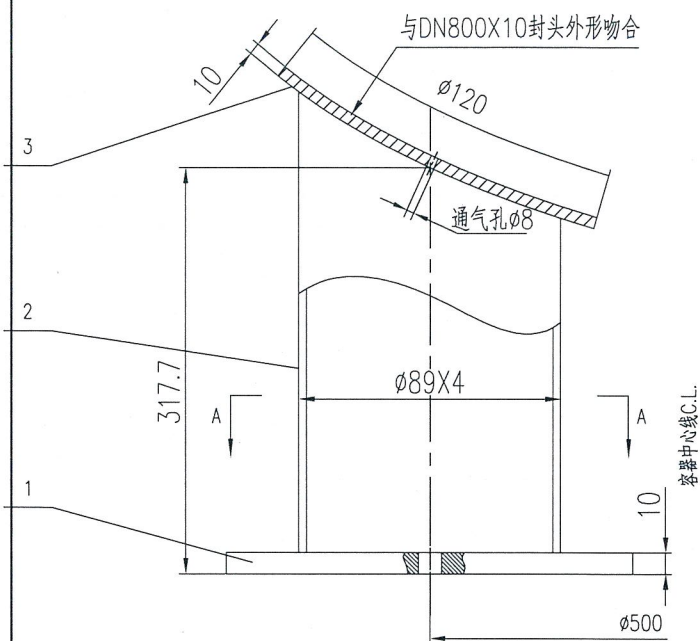

GENERAL REQUIRES

- ACCORDING TO NB/T47065.4-2018 REQUIREMENTS
TO MANUFACTURE AND INSPECT.

- THE SHARP EDGE SHOULD BE CHAMFERED

3		垫板 PAD PLATE	φ120X10	3	SA-516M Gr.485	0.9	2.7	
2		接管 PIPE	φ89x4 L=327	3	SA-106M B	2.7	8.1	
1		底板 BASE PLATE	150X150X10	3	SA-516M Gr.485	1.8	5.4	
件 号 NO.	图号或标准号 DWG NO. OR STD. NO.	名 称 PARTS. NAME		数量 QTY.	材 料 MATERIAL	单 SINGLE	总 TOTAL	备 注 REMARKS
						质量 MASS(kg)		
				支撑式支座 BRACKET SUPPORT		图 号: TXNX23-019-04 DWG.NO.		
						共 张 第 张 PAGE: OF		
						重 量 WEIGHT		
标 记 LABEL	处 数 PLACE	分 区 SUBAREA	更改文件号 NO.OF CORRECT DOCUMENT	签 名 SIGNATURE	年 月 日 DATE	5.4	1	1:6
设 计 DESIGNE		2024.6.14		/		泰兴宁兴机械有限公司		
批 准 APPROVE		2024.6.14						
						REV 0		