


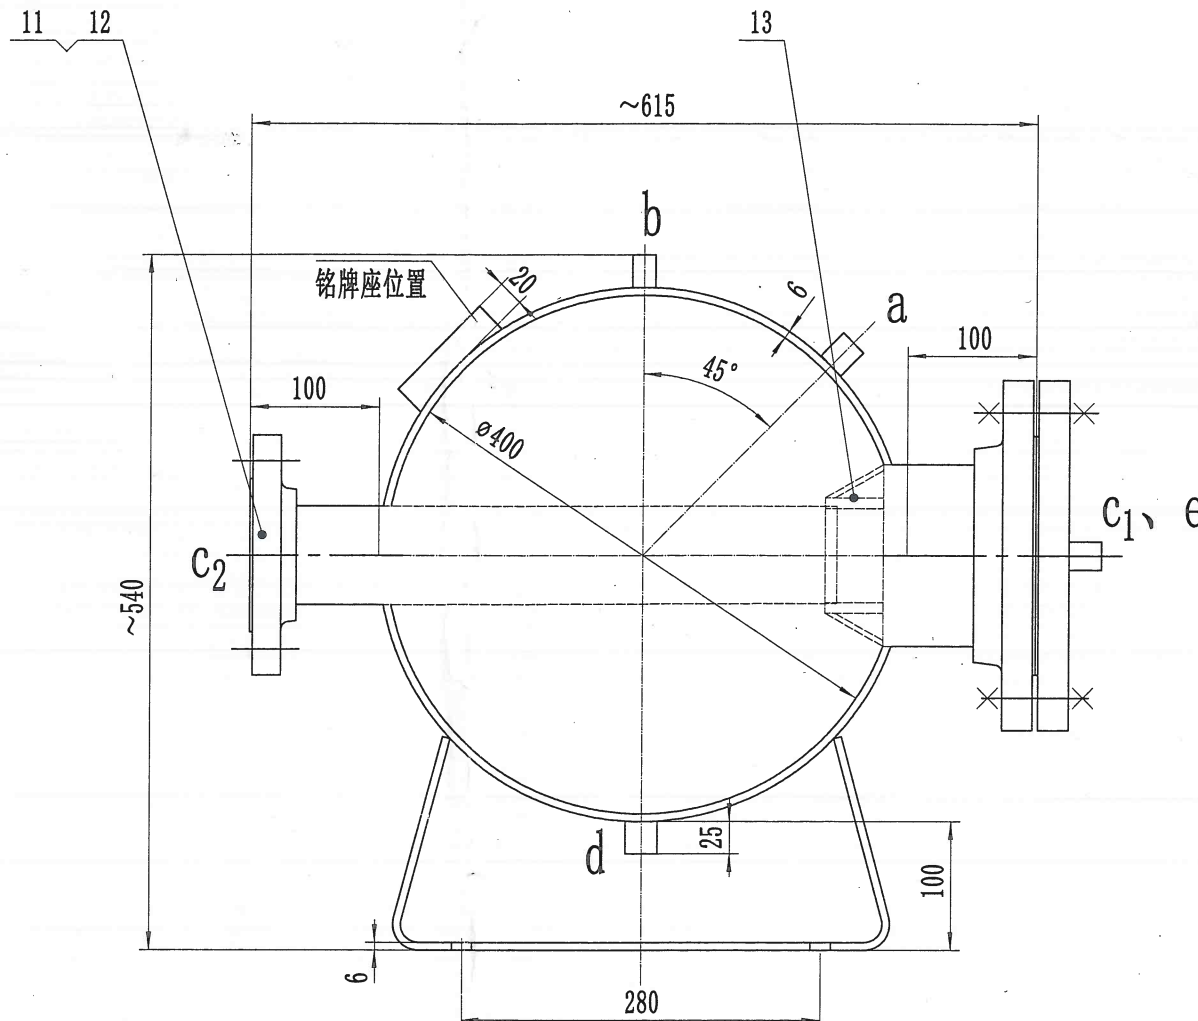


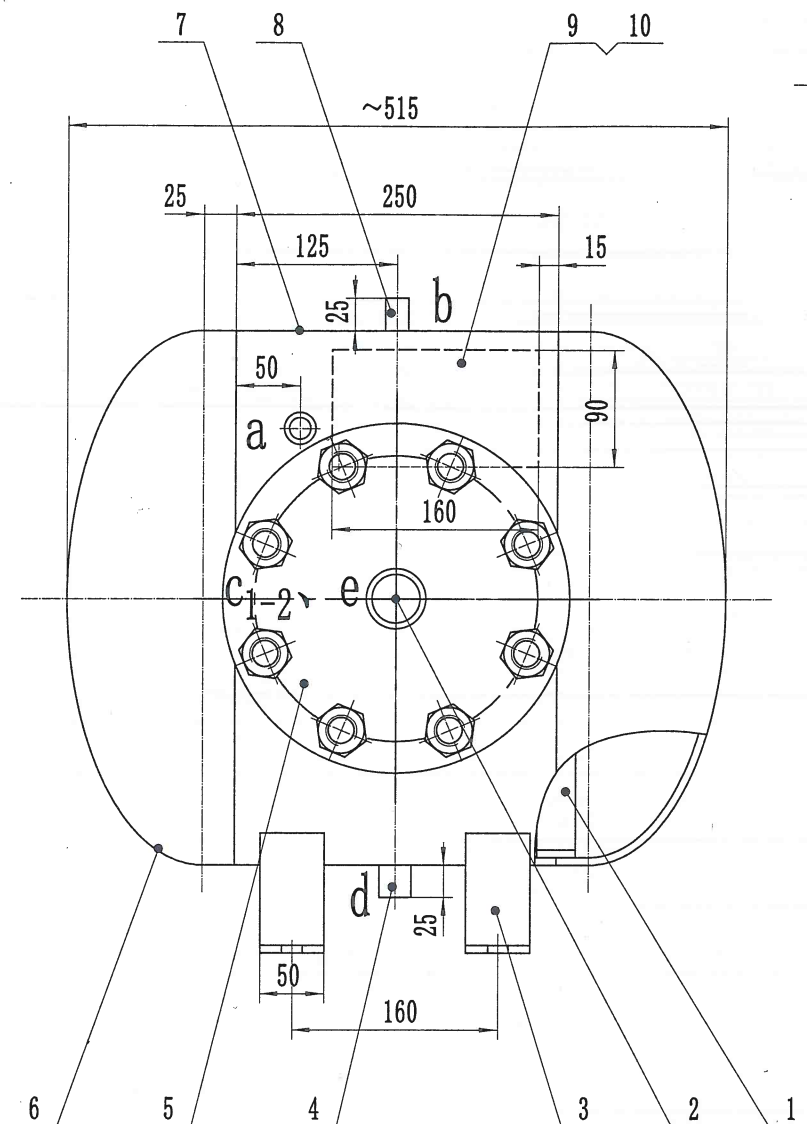


NAMR PLATE SUPPORT TO SHELL WELDING DETAIL
铭牌座与筒体的焊接详图

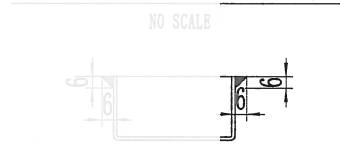


SHELL TO SHELL AND HEAD WELDING DETAIL
筒体与筒体和封头的焊接详图

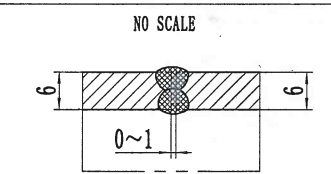


SHELL TO SHELL AND HEAD WELDING DETAIL
筒体与筒体和封头的焊接详图

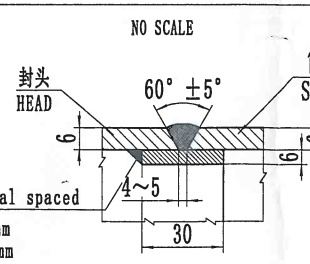


NOZZLE a, b, d TO SHELL AND HEAD WELDING DETAIL
接管 a, b, d 与壳体和封头的焊接详图

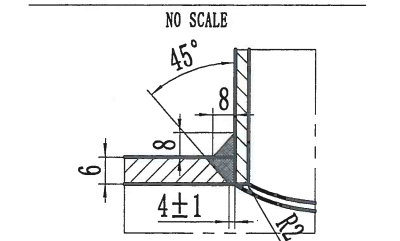


NOZZLE c1, c2 TO OUTSIDE SHELL WELDING DETAIL
接管 c1, c2 与外表体的焊接详图

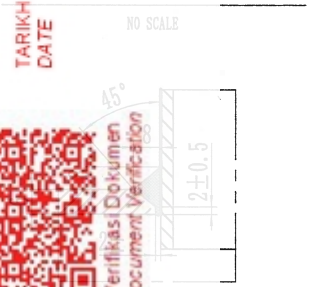


NOZZLE c1 TO FLANGE WELDING DETAIL
接管 c1 与法兰的焊接详图

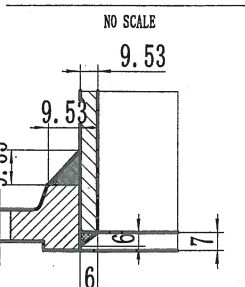

NOZZLE c2 TO FLANGE WELDING DETAIL
接管 c2 与法兰的焊接详图

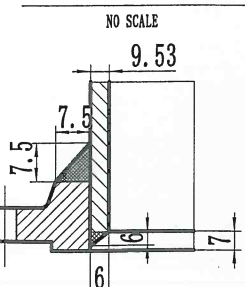

NOZZLE c2 TO NOZZLE WELDING DETAIL
接管 c2 与接管的焊接详图

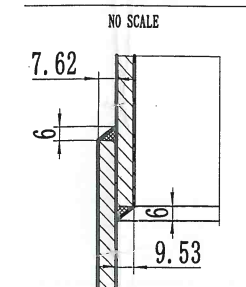

技术特性表 TECHNICAL FEATURES


设计压力DESIGN PRESS. MPa	0.84	设计温度DESIGN TEMP. °C	80
最大允许工作压力MAWP MPa	0.84	最低设计金属温度MDMT °C	-10
操作压力OPERATING PRESS. MPa	0.8	工作温度WORK TEMP. °C	80
水压试验压力HYDR. TEST PRESS. MPa	1.1	介质MEDIUM	压缩空气COMPRESSED AIR
气压试验压力PNEU. TEST PRESS. MPa		全容积TOTAL VOLUME L	50
腐蚀裕量CORR. ALLOW. mm	1.0	设备空重EMPTY Kg	~72
焊接接头系数JOINT EFFICIENCY	A: 0.85 B: 0.8	充水重FULL WATER Kg	~122
标准厚度INSUL. 材料MATERIAL 厚度THICKNESS		射线探伤RADIOGRAPHY	周焊SPOT FOR UP-11(b)
标识印记CERTIFICATION MARK STAMP	ASME U	渗透探伤PENETRANT	不要NO
介质特性MEDIUM NATURE	非致命NON-LETHAL	主要承压元件材料MATERIAL OF MAIN COMPRESSIVE PARTS	SA-516M Gr. 485
水压试验温度HYDROTEST TEMP. °C	5	冲击试验IMPACT TEST	免除EXEMPTED FOR UC-20(f) and UCS-66(c)
消除应力热处理STRESS RELIEF	不要NO	油漆PAINTING	及技术要求(本图) SPECIFICATION (THIS Dwg.)
表面清理等级CLEANING CLASS	及技术要求(本图) SPECIFICATION (THIS Dwg.)		
设计规范DESIGN CODE	ASME CODE SECTION VIII, DIV. 1, 2023 EDITION		

技术要求 TECHNICAL SPECIFICATION

- 所有承压部件的对接焊缝应采用全熔透焊缝, 并应采用焊缝识别卡 (JIC) 上指定的WPS施焊。
All butt welds of pressure parts shall be full penetration welded, using the applicable WPS specified in Joint Identification Card (JIC).
- 管口、支座和铭牌的方位按本图。
The orientation for the nozzle, support and name plate shall be as per this drawing.
- 除图中注明外, 角焊缝的焊脚高度按所连接件中较薄者的厚度; 图中注明的焊角尺寸为最小值。
The leg of fillet weld shall equal to the thickness of thinner parts except otherwise specified in drawing. The leg size on this drawing is the minimum value.
- 压力试验合格后, 内部清理干净外表面整体除锈, 除锈等级达到SA2.5级, 合格后涂防锈底漆、面漆各一道。
The internal surface of the tank should be cleaned after hydrostatic test. Coat Antirust Primer and finish paint one time after passing test. The grade of rust cleaning reached SA2.5.
- 除另外注明外, 本图所有尺寸均为毫米, 未注公差遵循GB/T19804-2005中C等级的要求。
Unless otherwise specified, all dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005.
- 法兰螺栓孔跨中心布置。
The flange bolt holes shall straddle equipment centre line and be equal spaced.

管口表 LIST OF NOZZLE

代号SYMBOL	数量QTY	法兰标准FLANGE STD.	公称尺寸SIZE	级别CLASS	密封面SEALING	类型TYPE	接管NOZZLE	用途SERVICE
a	1		Rp ₂		内螺纹 Internal thread	内螺纹 Internal thread	ø35×7	进气口 Inlet
b	1		NP ₁		内螺纹 Internal thread	内螺纹 Internal thread	ø38×8	安全阀口 Safety Valve
c1	1	ASME B16.5-2020	DN125	Class150	RF	SO	ø141.3×9.53	检修口 Access Opening
c2	1	ASME B16.5-2020	DN65	Class150	RF	SO	ø73×9.53	排污口 Blowing Outlet
d	1		R ₂		外螺纹 External thread	外螺纹 External thread	ø22×7	排污口 Drain
e	1		Rp ₂		内螺纹 Internal thread	内螺纹 Internal thread	ø35×7	检修口 Access Valve



13	ASME B36.10M	接管NOZZLE OD88.9×7.62	1	SA-106M Gr. B	0.75	L=45
12	ASME B36.10M	接管NOZZLE OD73×9.53	1	SA-106M Gr. B	6.7	L=450
11	ASME B16.5-2020	法兰FLANGE DN65 CL150 SO/RF	1	SA-105M	3.45	
10	HKAT-00	铭牌Nameplate	1	COMPONENT	0.05	
9	HKAT-01	铭牌座NAMEPLATE SUPPORT	1	SA-516M Gr. 485	0.2	
8	HKA0287-08	安全阀口Safety Valve	1	SA-105M	0.2	
7	HKA0287-07	筒体SHELL ID400 6=6	1	SA-516M Gr. 485	15.0	L=250
6	HKA0287-06	法兰FLANGE DN125 6=6	2	SA-516M Gr. 485	9.7	19.4
5	HKA0287-05	检修口Access Opening DN125	1	COMPONENT	20.1	
4	HKA0287-04	排污口Drain outlet R ₂	1	SA-105M	0.12	
3	HKA0287-03	支承式支座Bracket Support	2	SA-516M Gr. 485	1.4	2.8
2	HKA0287-02	丝扣Threaded coupling Rp ₂	2	SA-105M	0.2	0.4
1	HKA0287-01	衬圈Back Ring 30×6	1	SA-516M Gr. 485	1.7	
序号	图号或标准号	名称及规格	数量	材料	单件重量 (Kg)	备注
	空气炮 GAS TANK	ID400×515		HKA0287/REV.0		
设计Design	日期Date	2024.10.26	青岛海信工程技术有限公司			
批准Approved	日期Date	2024.10.26	QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.			

JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00915
VERIFICATION NO.

05/08/2025
TARIKH: DATE

Verifikasi Dokumen
Document Verification