



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

Verifikasi Dokumen
Document Verification

12.5

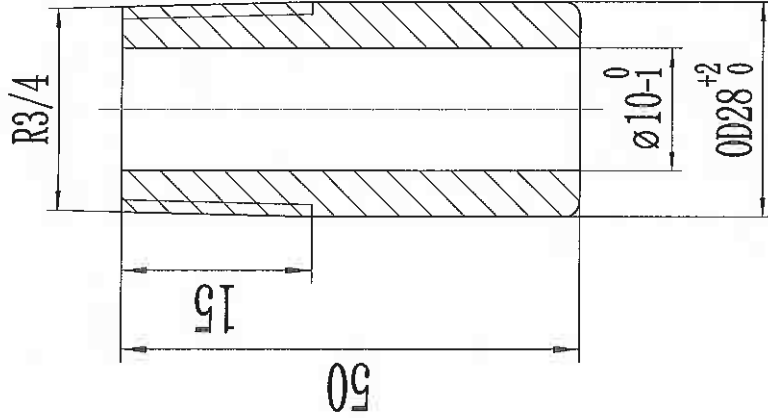

1、本图所有尺寸均为毫米

all dimensions are in millimeters

2、材质: SA-105M Material: SA-105M

信 (通) 用
件 量 记

旧版图总号

版 图 总 号

签 字

日 期

检查员 日期

排污口Drain outletR₄³

SA-105M

HKA0286-01/REV.1

设计Design

韩泰东

日期Date

2024/08

批准Approved

韩泰东

日期Date


2024/08

青岛海空信合工程有限公司

QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.

TARIKH:
DATE
05/08/2025

与封头外形吻合
IN ACCORDANCE WITH HEAD SHAPE

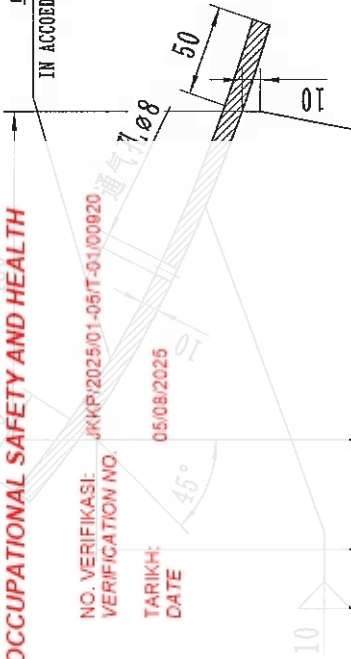

- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
All dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、所有角焊缝双面连续熔焊，其焊角高度按较薄板厚度。
All fillet weld joints are continuous at both sides with the height of the fillet weld shall equal to the thickness of thinner parts.

3	橡胶Subplate	δ=10	1	SA-516B Gr.485	4.35	备注Remark 材料Material 规格Specification
2	橡胶rib plate	δ=10	2	SA-516B Gr.485	3.77	
1	橡胶Baseplate	δ=10	1	SA-516B Gr.485	1.6	
字号S/N	名称及规格Name and Spec.					
支座 SUPPORT				COMPONENT		HKA0286-02/REV. 1
设计Design	日期Date	707/10/08		青岛海空合工程有限公司		
批准Approved	日期Date	707/10/08		QINGDAO HAIKONG XINGE ENGINEERING CO., LTD.		




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/Q0920
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

Verifikasi Dokumen
Document Verification

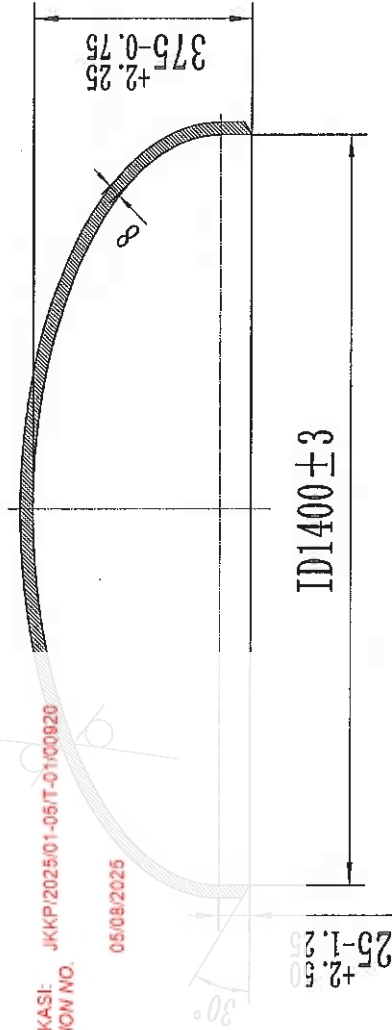

注NOTES:

1. 封头成形后的最小厚度不小于7.2mm;

The min. thickness of the formed head shall be no less than 7.2mm

2. 除另外注明外，本图所有尺寸均为毫米，形状公差应符合UG-81的规定;

Unless otherwise specified, all dimensions are in millimeters, the

Shape tolerances shall conform of UG-81;

3. 材质: SA-516M Gr. 485 Material: SA-516M Gr. 485

2:1椭圆封头ELLIPSOIDAL HEAD ID1400×8 (7.2)			SA-516M Gr485		HKA0286-03/REV. 1
设计Design	韩恭东	日期Date	2024.10.8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.	
批准Approved	韩恭东	日期Date	2024.10.8		



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




Verifikasi Dokumen
Document Verification

NO. VERIFIKASI: JKKP/2025/01-05/T-01/00020
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

其余 $\frac{25}{\nabla}$

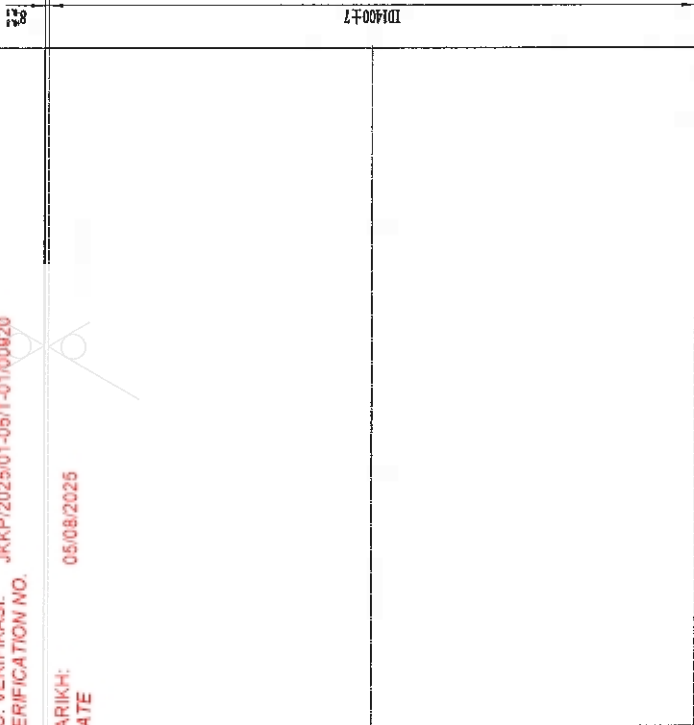

借 (鑑) 用
件 登 記
出 處 圖 號 号
庫 房 總 号
簽 字
日 期
查 驗 員 日 期

注NOTES:

- 所有受压部件的焊缝应采用全熔透焊缝, 并应采用焊缝识别卡 (JIC) 上指定的WPS施焊;
All welds of pressure parts shall be full penetration welded, using the applicable WPS specified in Joint Identification Card(JIC).
- 筒体最大内径与最小内径差小于等于14mm;
The deviation of maximum and minimum inner diameter is not exceed 25mm.
- 材质: SA-516M Gr. 485 Material: SA-516M Gr. 485

筒体SHELL ID1400		δ=8	SA-516M Gr. 485	HKA0286-04/REV. 1
设计Design	设计人Design	日期Date	7074/108	青岛海信工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.
批准Approved	批准人Approved	日期Date	7074/108	



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920


VERIFICATION NO.

05/08/2025


TARIKH:
DATE

Verifikasi Dokumen
Document Verification


件12, 13详图
12 and 13 details
NO SCALE





件11, 14详图
11 and 14 details
NO SCALE



件8详图
8 details
NO SCALE

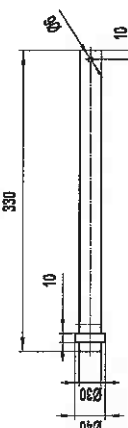

件7详图
7 details
NO SCALE

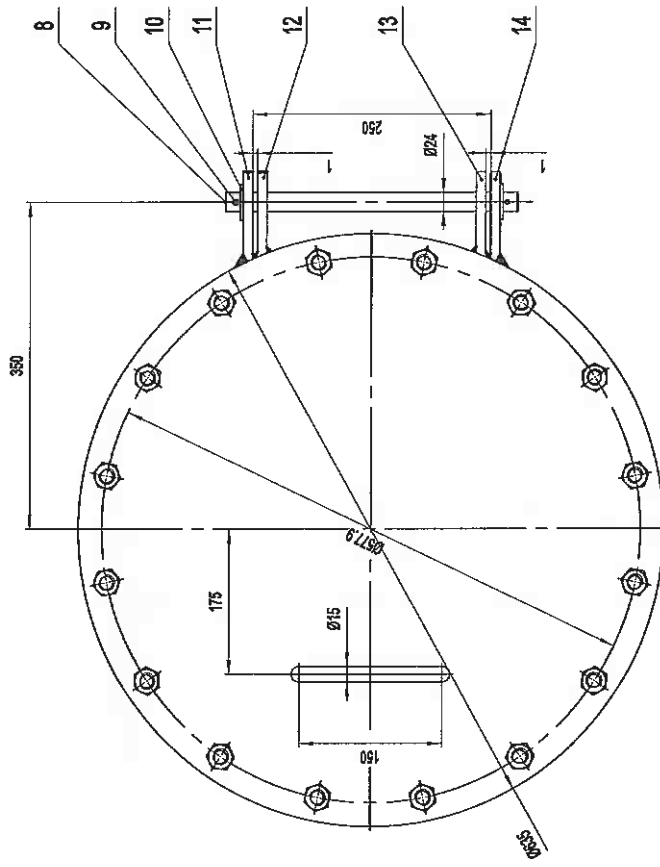

- 注NOTES:
- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
all dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
 - 2、所有角焊缝双面连续焊，其焊角高度按较薄板厚度。
All fillet weld joints are continuous at both sides with the height of the fillet weld shall equal to the thickness of thinner parts.

14	本图This drawing	盲轴耳Blind shaft ear	1	Q345R	3.2
13	本图This drawing	法兰轴耳Flange shaft ear	1	Q345R	2.8
12	本图This drawing	法兰轴耳Flange shaft ear	1	Q345R	2.8
11	本图This drawing	盲轴耳Blind shaft ear	1	Q345R	3.2
10		垫圈Washer	2	200HV	
9		销PIN	2	COMPONENT	0.1 0.2
8	本图This drawing	轴销Shaft pin	1	20	4.5B
7	本图This drawing	把手Handle	1	20	1.2
6	ASME B16.5-2008	法兰FLANGE	1	SA-105M	98.5
5	ASME B16.20-2007	盲法兰BLIND FLANGE	1	CRS-F.C	
4	ASME B16.5-2008	法兰FLANGE	1	SA-105M	49.5
3	ASME B18.2.2-2005	螺母NUT	32	SA-194M Gr.2H	0.322 10.3
2	ASME B18.3.1-2014	双头螺栓Stud stud	16	SA-193M Gr.2H	0.98 15.7
1	ASME B18.3.1-2014	双头螺栓Stud stud	16	SA-193M Gr.2H	0.98 15.7

序号NO. 材料名称及规格NAME AND SIZE 材料Material 备注Remarks

人孔MAN HOLE COMPONENT HK40286-05/REV. 1

设计Design	日期Date	2024/10/8
审核Approval	日期Date	2024/10/8

青岛海空信合工程有限公司
QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.





JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

Verifikasi Dokumen
Document Verification

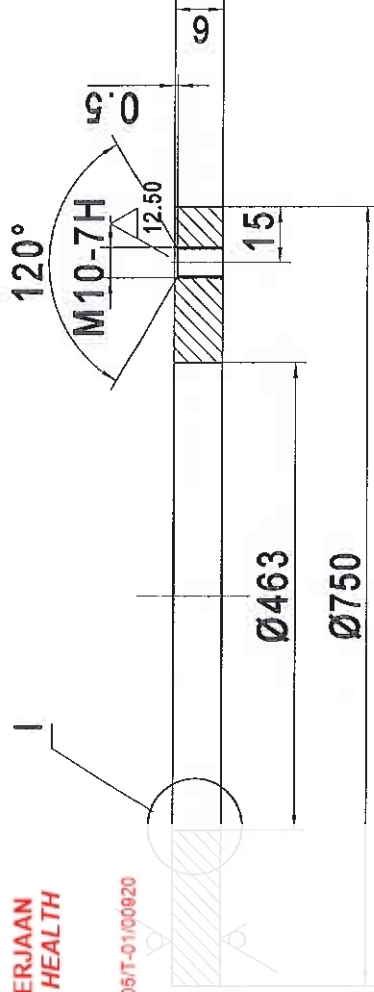

注NOTES:

- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
All dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、材质: SA-516M Gr.485 Material: SA-516M Gr. 485

借 (建) 用
件 登 记

旧 版 图 总 号

版 图 总 号

签 字

日 期

档案员 日期

补强圈REINFORCEMENT PAD Ø750x6

SA-516M Gr. 485

HKA0286-06/REV.0

设计Design

陈恭东

日期Date

2024.10.8

青岛海空信合工程有限公司

批准Approved

陈恭东

日期Date

2024.10.8

QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH




NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

Verifikasi Dokumen
Document Verification

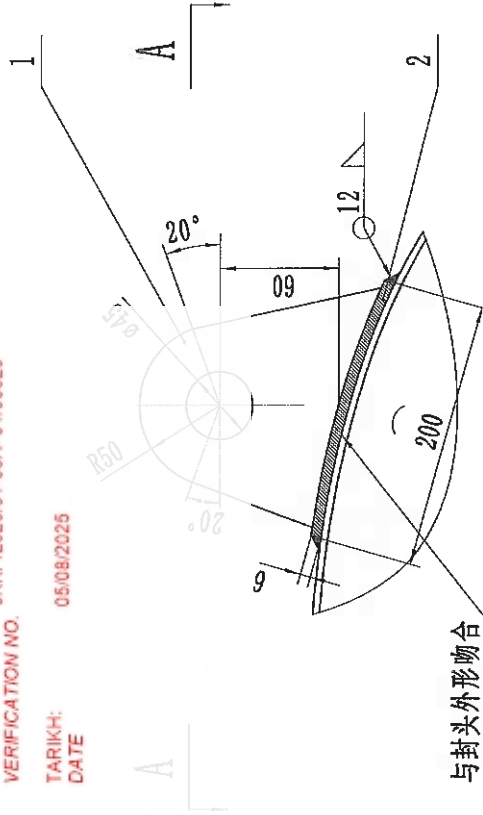

A - A

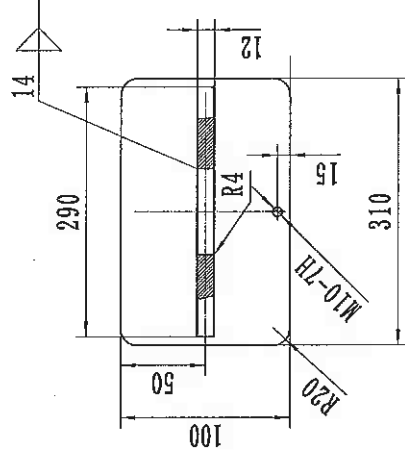

注NOTES:

- 1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；
all dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;
- 2、材质: SA-516M Gr485 Material: SA-516M Gr485
- 3、所有角焊缝双面连续焊，其焊角高度按较薄板厚度。

All fillet weld joints are continuous at both sides with the height of the fillet weld shall equal to the thickness of thinner parts.

借(建)用 件登记	旧版图总号	版图总号	签字	日期	档案员 日期
--------------	-------	------	----	----	----------

2	垫板 Pad 200X100X6	1	SA-516M Gr. 485	3.1	
1	吊耳 LUG	1	SA-516M Gr. 485	1.3	
序号 S/N	材料名称及规格 Name and Spec.	数量 QTY.	材料 Material	重量 Weight (kg)	备注 Remark

吊耳 LIFTING LUGS SA-516M Gr. 485 HKA0286-07/REV.1

设计 Design	日期 Date	10/24/108	青岛海空信合工程有限公司
批准 Approved	日期 Date	2024/10/8	QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.




JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

Verifikasi Dokumen
Document Verification

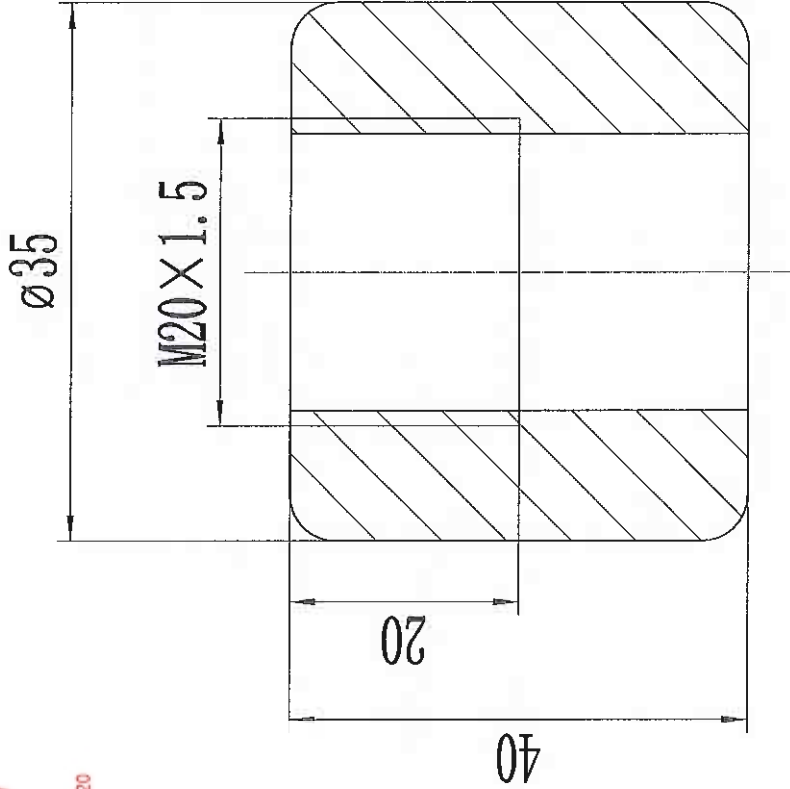

1、本图所有尺寸均为毫米

all dimensions are in millimeters

2、材质: SA-105M Material: SA-105M

压力表 NOZZLE FOR PRESSURE GAUGE M20x1.5 SA-105M HKA0286-08/REV. 1

设计 Design	日期 Date	2024/10/8	青岛海空信合工程有限公司 QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.
批准 Approved	日期 Date	2024/10/8	

图号
Drawing No.

图号
Drawing No.

图号
Drawing No.

图号
Drawing No.

图号
Drawing No.

图号
Drawing No.



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920
VERIFICATION NO.

TARIKH: 05/08/2025
DATE

Verifikasi Dokumen
Document Verification

150

135

$\delta = 1$

THK. 1

4-Ø4

A S M E
U

CERTIFIED BY: QINGDAO HAIKONG XINHE ENGINEERING CO., LTD

MWP MPa AT 100 °C

MDWT 0 °C AT 0.84 MPa

MRF. S/N

YEAR BUILT 2025 DWG No. HK40286/REV.0

HYDRO. TEST PRESSURE 1.1 MPa HYDRO. TEST DATE

DESIGN CODE ASME CODE SECTION VIII, DIV. 1, 2023 EDITION

MFR ADD: Middle Daneng Road, Jiaobei Industrial Park,

Jiaozhou City, Shandong Province 266313 P.R. China

90

75

20

1. 铭牌表面不涂漆。

The Surface of the nameplate shall be left unpainted.

2. ASME认证标记用钢印打在铭牌上。

The Certification Mark shall be stamped on the nameplate.

3. 所有标志可用蚀刻、雕刻或钢印标在铭牌上，所有字符应凹进至少0.1mm；

Nameplates may have markings produced by either etching, debossing

or stamping. Characters shall be concaved at least 0.1mm deep.

4. 所有标记和字符应清晰且高度不得小于4mm。

The required markings on a nameplate shall be legible and in characters not

less than 4 mm high.

5. 产品编号: A24U063

Product number: A24U063

2	GB827-86	铆钉 Rivet	3×8	4	L3			
1		铭牌 Nameplate		1	S30408			0.1
序号 NO.	规格名称及规格 NAME AND SIZE		材料 MATERIAL		重量 WEIGHT		备注 REMARKS	
铭牌 Nameplate			90×150			HKAT-00/REV. 1		
设计 Design	韩泰东	日期 Date	2024.10.8			青岛海空信合工程有限公司		
审核 Audit	韩泰东	日期 Date	2024.10.8			QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.		



JABATAN KESELAMATAN DAN KESIHATAN PEKERJAAN
DEPARTMENT OF OCCUPATIONAL SAFETY AND HEALTH



NO. VERIFIKASI: JKKP/2025/01-05/T-01/00920

VERIFICATION NO.


05/08/2025

TARIKH:

DATE

Verifikasi Dokumen
Document Verification

A

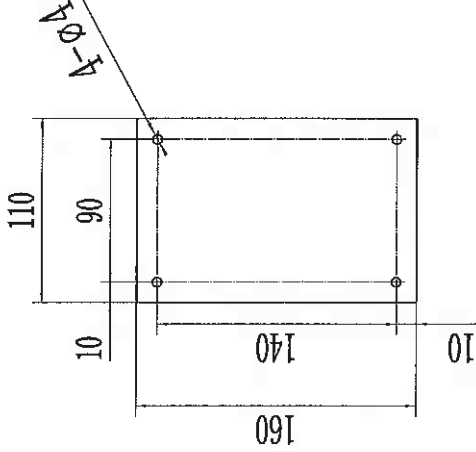

A 向

NOTES:

1、本图所有尺寸均为毫米，未注公差遵循GB/T19804-2005中C等级的要求；

All dimensions are in millimeters, the fabrication tolerance shall conform to the grade C level of GB/T19804-2005;

2、材质: SA-516M Gr. 485 Material: SA-516M Gr. 485

3、所有角焊缝单面连续焊，其焊角高度按较薄板厚度。

All fillet weld joints are continuous at single side with the height of the fillet weld shall equal to the thickness of thinner parts.

信 (通) 用 件 登 记
图 纸 总 号
图 纸 总 号
签 字
日 期
档案员 日期

铭牌/座NAMEPLATE SUPPORT		SA-516M Gr. 485		HKAT-01/REV. 1	
设计Design	设计人	日期Date	2024.10.8	青岛海信工程合有限公司	
批准Approved	批准人	日期Date	2024.10.8	QINGDAO HAIKONG XINHE ENGINEERING CO., LTD.	