
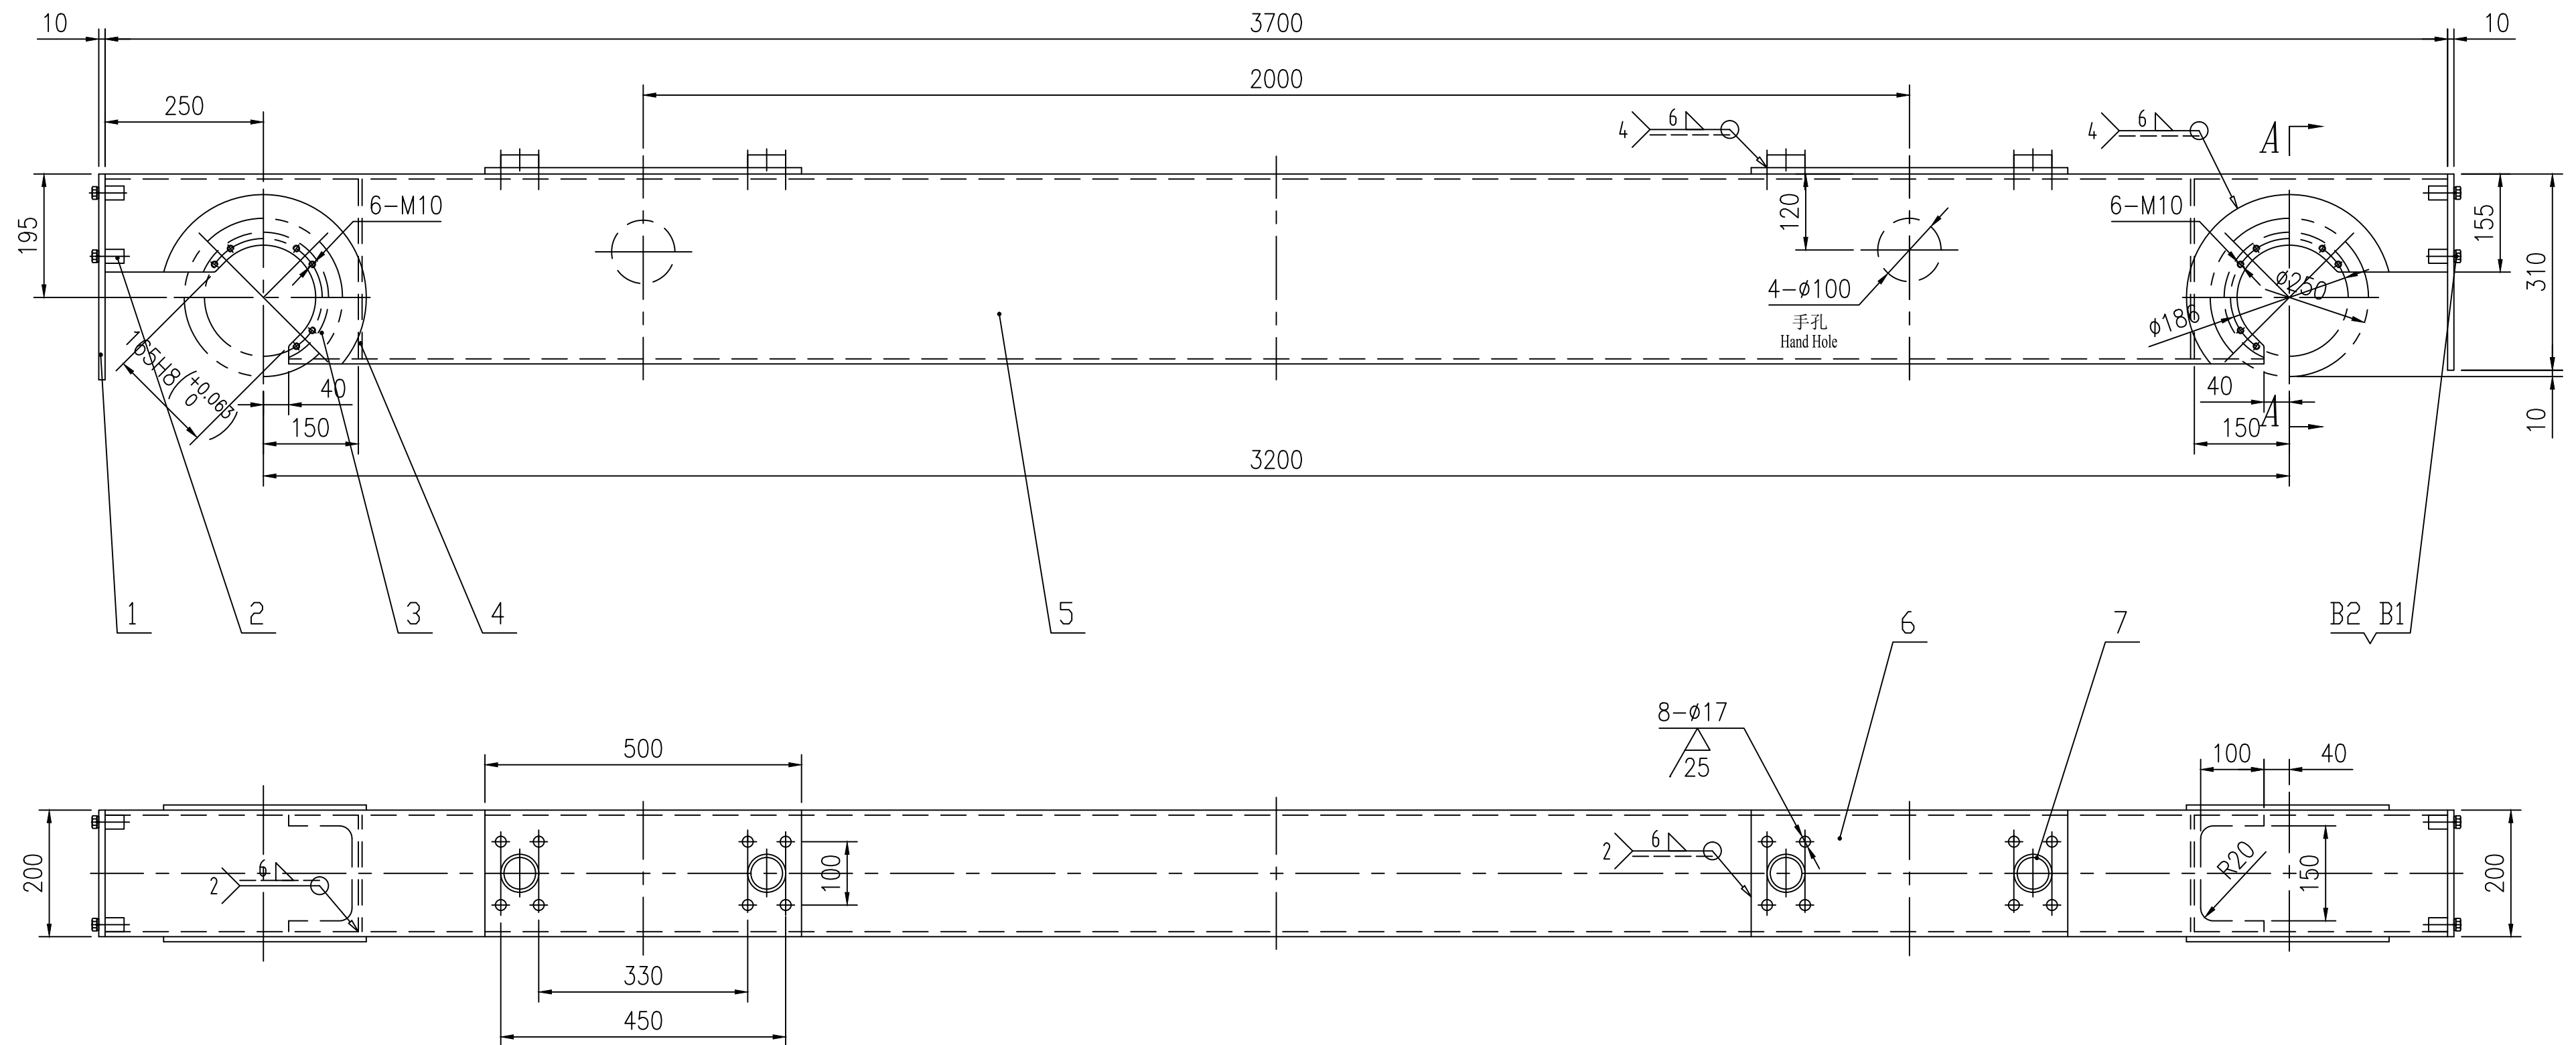
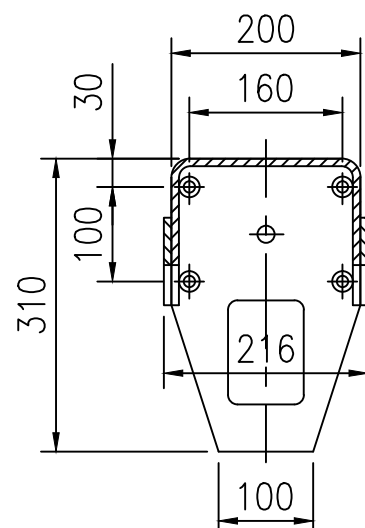



$$A-A$$


1

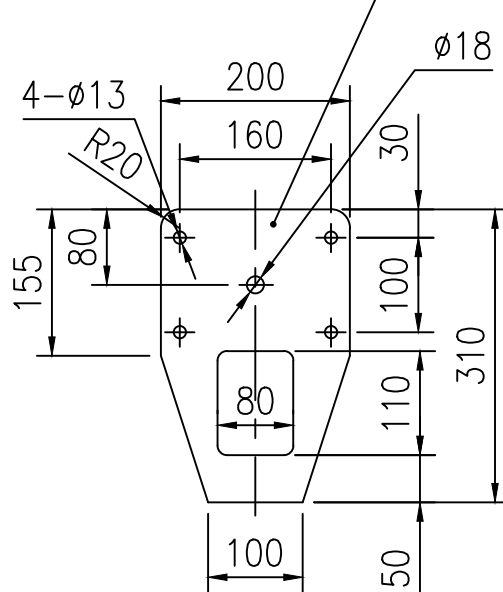

Technical Requirements:

1. The steel plate must go through shot blasting before blanking, so that its surface roughness can reach R2.5. After that, it will be sprayed with oxygen free anti-corrosive primer.
2. The panel and the web shall be welded with a verticality less than 1mm.
3. The E5016 electrode is adopted, unmarked weld height is 6, and the surrounding area inside the end beam wheel cavity is fully welded with a height of 4.

技术要求

- 1、下料前钢板表面必须做抛丸处理，表面粗糙度为R2.5，抛丸后喷涂无氧防锈底漆。
- 2、面板和腹板焊接时垂直度小于1mm。
- 3、焊条用E5016，未注焊缝高度为6，端梁车轮腔内，周边满焊焊高为4

定位销装配时焊

Weld when assembling the locating pin

B2		垫圈 12 Washer 12	8	65Mn			
B1		螺栓 M12×30 Bolt M12*30	8	8.8S			
7		定位销 Locating Pin	4	C45			
6		-10×200×500	2	S355JR	7.9	15.8	
5		矩形管300×200×8-3700 Rectangular Pipe 300*200*8-3700	1	S355JR	200	200	
4		-8×184×284	2	S355JR	3.3	6.6	
3		-8×225×325	4	S355JR	2.3	9.2	
2		圆钢螺母Φ22/M12-30 Round Steel Nut Ø22/M12-30	8	C45			
1		-10×200×310	2	S355JR	3.6	7.2	
序号 S/N	代 号 Code	名 称 Name	数量 Qty.	材 料 Material	单件重量 Single Piece Weight	总计 Total	备 注 Remarks
					浙江浙起机械有限公司 Zhejiang Zheqi Machinery Co., Ltd.		
					大车端梁 Crane End Beam		
					QZ10.02		