


1. GUI

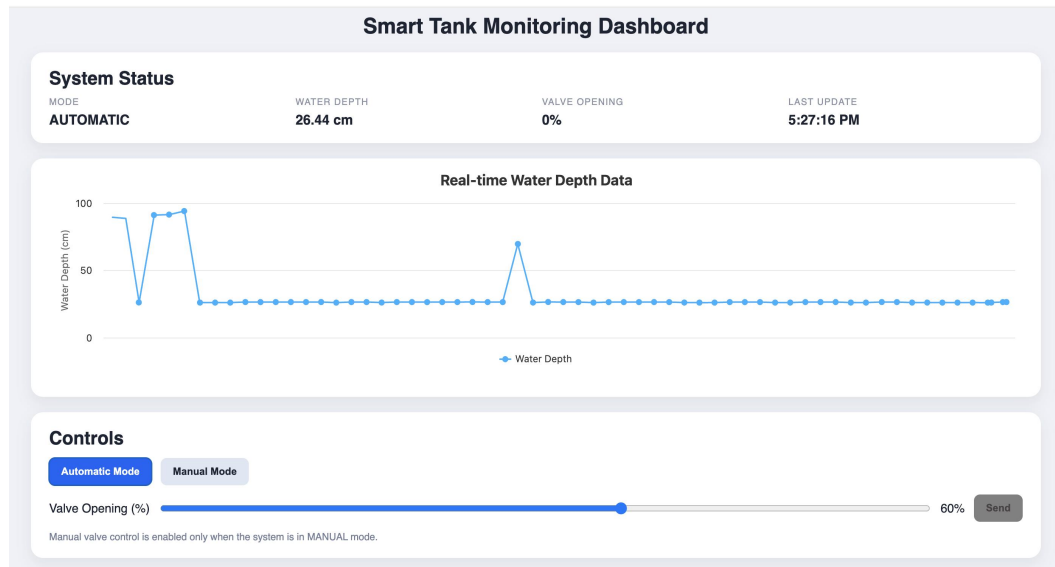


1.1 Implementation


The CUS is implemented using Java and the Spring Boot framework, while the DBS is developed using HTML, CSS, and JavaScript, with charts created using Highcharts.

2. FSM Diagrams


2.1 FSM diagram for TMS

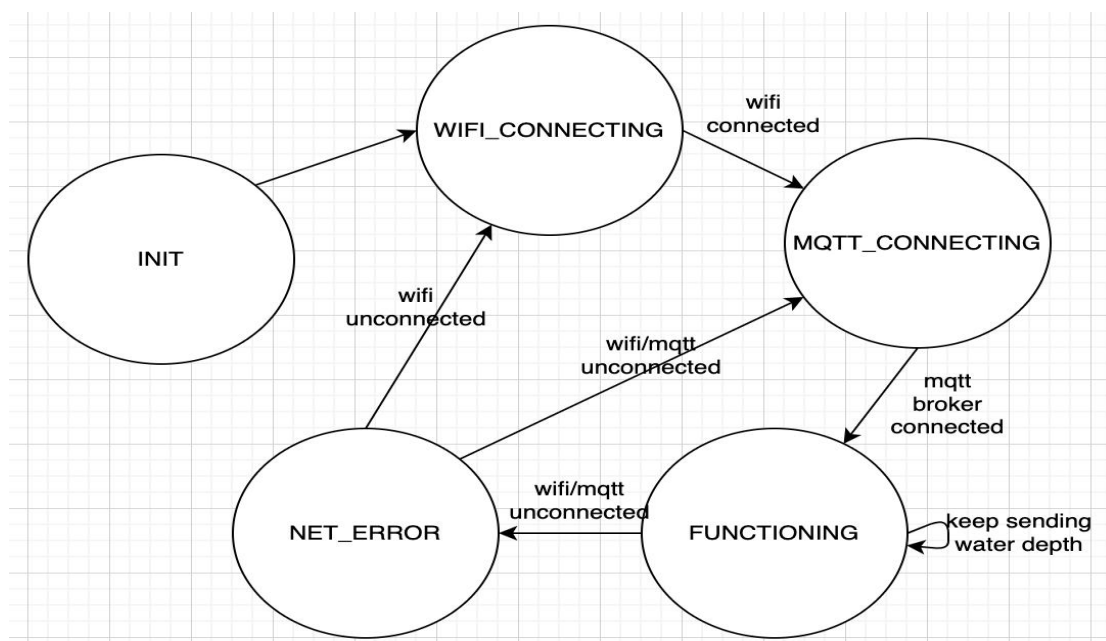

2.2 FSM diagram for the working mode in WCS

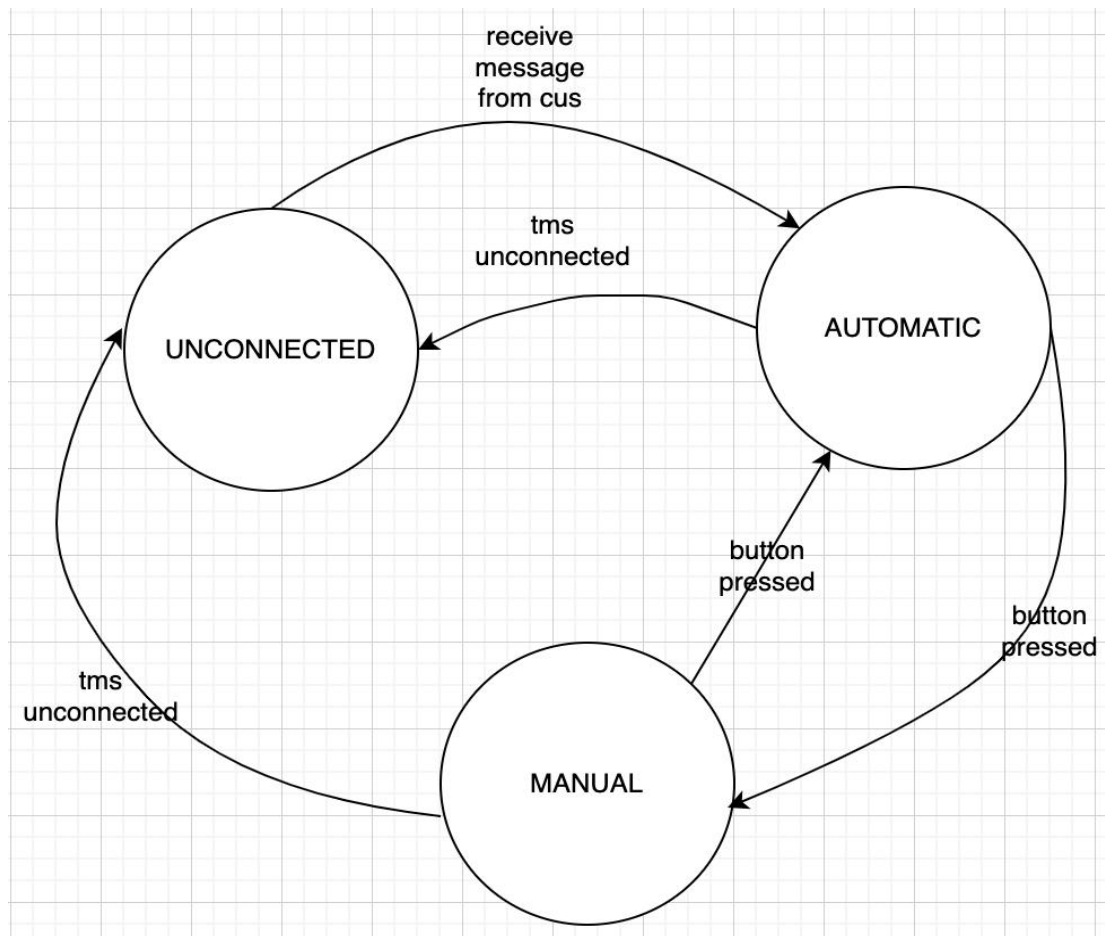


2.3 FSM diagram for the potentiometer in the WCS

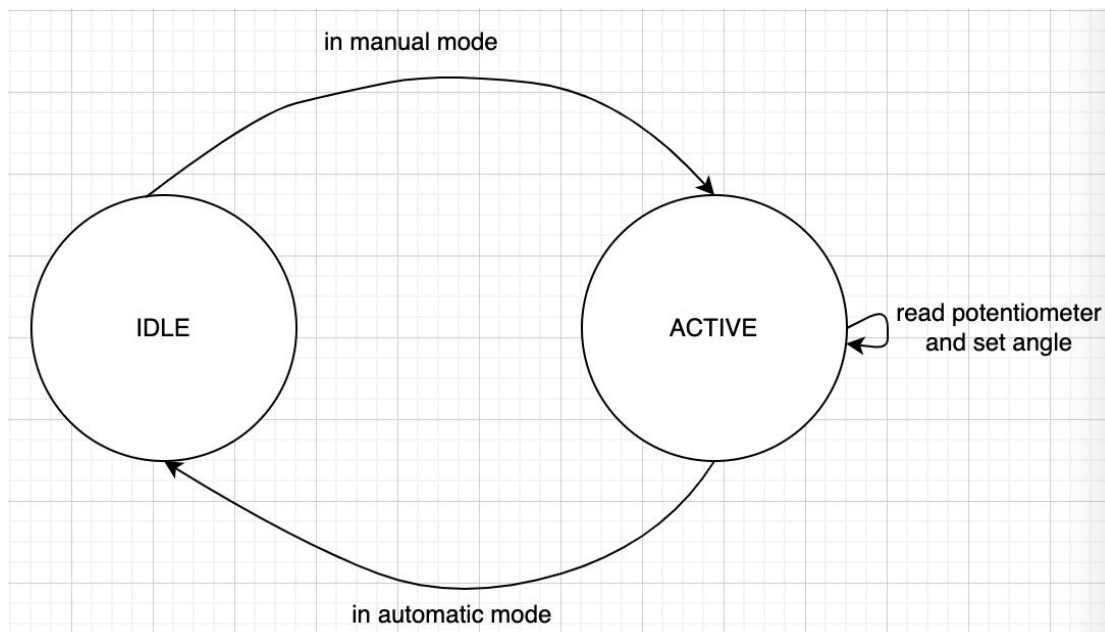


3. Schema and breadboard

3.1 TMS

I could not find an ESP32 in Tinkercad or Fritzing, so I selected an ESP board that is similar to the ESP32 in Fritzing.

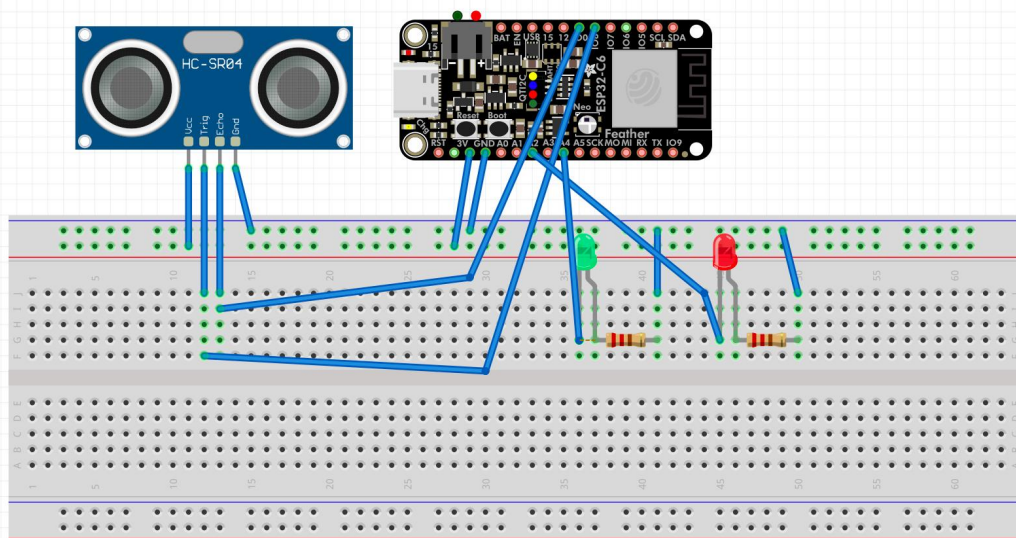

fritzing

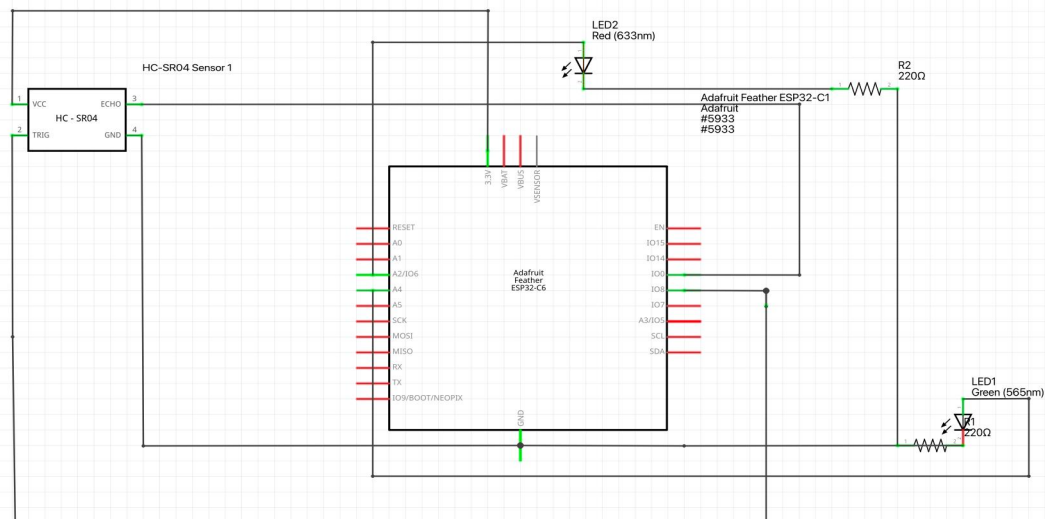

fritzing

3.2 WCS

