10-Inch E6 Full-Colour E-Paper Photo Frame

SOLUTION BRIEF · DATADELTA

Ultra-low-power BLE provisioning · 2.4 GHz Wi-Fi image transfer · DataDelta adaptive image processing

BLE + Wi-Fi, ultra-low power | **Extended whole-device standby** | **E-paper image quality**

01 BLE provisioning


Fast discovery. AP and STA credentials are set over BLE, with a low-power design throughout.

02 Wi-Fi image transfer

Images go over 2.4 GHz Wi-Fi via the device AP or a router in STA mode; the link opens on demand and closes when done.

03 Static display, ultra-low power

E-paper holds without refreshing; the device sleeps at low power and wakes on demand — hence the long standby.

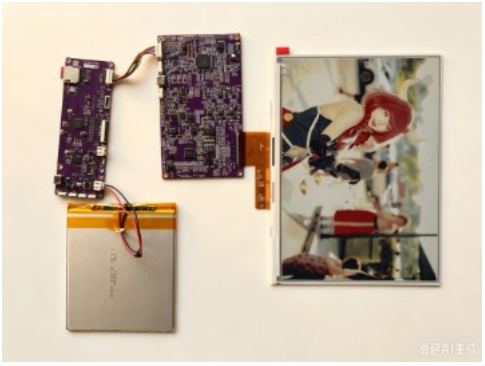

Actual result | Left: E6 full-colour e-paper (DataDelta adaptive pipeline) · Right: low-power main board and battery pack

DATADELTA IMAGE ENGINE DataDelta adaptive image processing

01
Adaptive resizing
Fitted to 1600 × 1200

02
Brightness and contrast
Highlights preserved

03
E6 COLOR MAPPING
Natural colour

04
Detail handling
Image detail retained

CORE SPECIFICATIONS Key specifications

Display	10-inch E6 full-colour	**Resolution**	1600(H) × 1200(V)
Active area	203.2 × 152.4 mm	**PPI**	200
Colours	Black / White / Red / Yellow / Green / Blue	**Storage**	32 GB microSD (TF)
MAIN CONTROL	BK725X + ultra-low-power BLE SoC	**Connectivity**	BLE (ultra-low power) + 2.4 GHz Wi-Fi
Power	5000 mAh Li-polymer battery / Type-C · extended standby	**Network**	Device access point / router STA
ASSEMBLY	Acrylic 239.10 × 186.70 × 24 mm	**Environment**	Operating 0~50°C / Storage -25~60°C
App support	Android 7.0+ / iOS 13.0+	**Image modes**	Fill and crop / Fit with margins / Custom crop / Custom rotation

WORKFLOW Process

BLE provisioning › **Wi-Fi transfer** › **Adaptive processing** › **E-paper refresh** › **Sleep • extended standby**

Note: an e-paper image holds without continuous power; consumption depends on network state, refresh rate and sleep settings. Enclosure, battery and features are customised per project, and the customer-confirmed specification takes precedence.

Note: the 10-inch demo pairs a BK725X main board with a separate TCON board.