
31.5-Inch E6 Full-Colour E-Paper Picture Frame

SOLUTION BRIEF · DATADELTA

Ultra-low-power BLE provisioning · 2.4 GHz Wi-Fi image transfer · DataDelta adaptive image processing

BLE + Wi-Fi, ultra-low power	Extended whole-device standby	In-house imaging pipeline tuned for e-paper

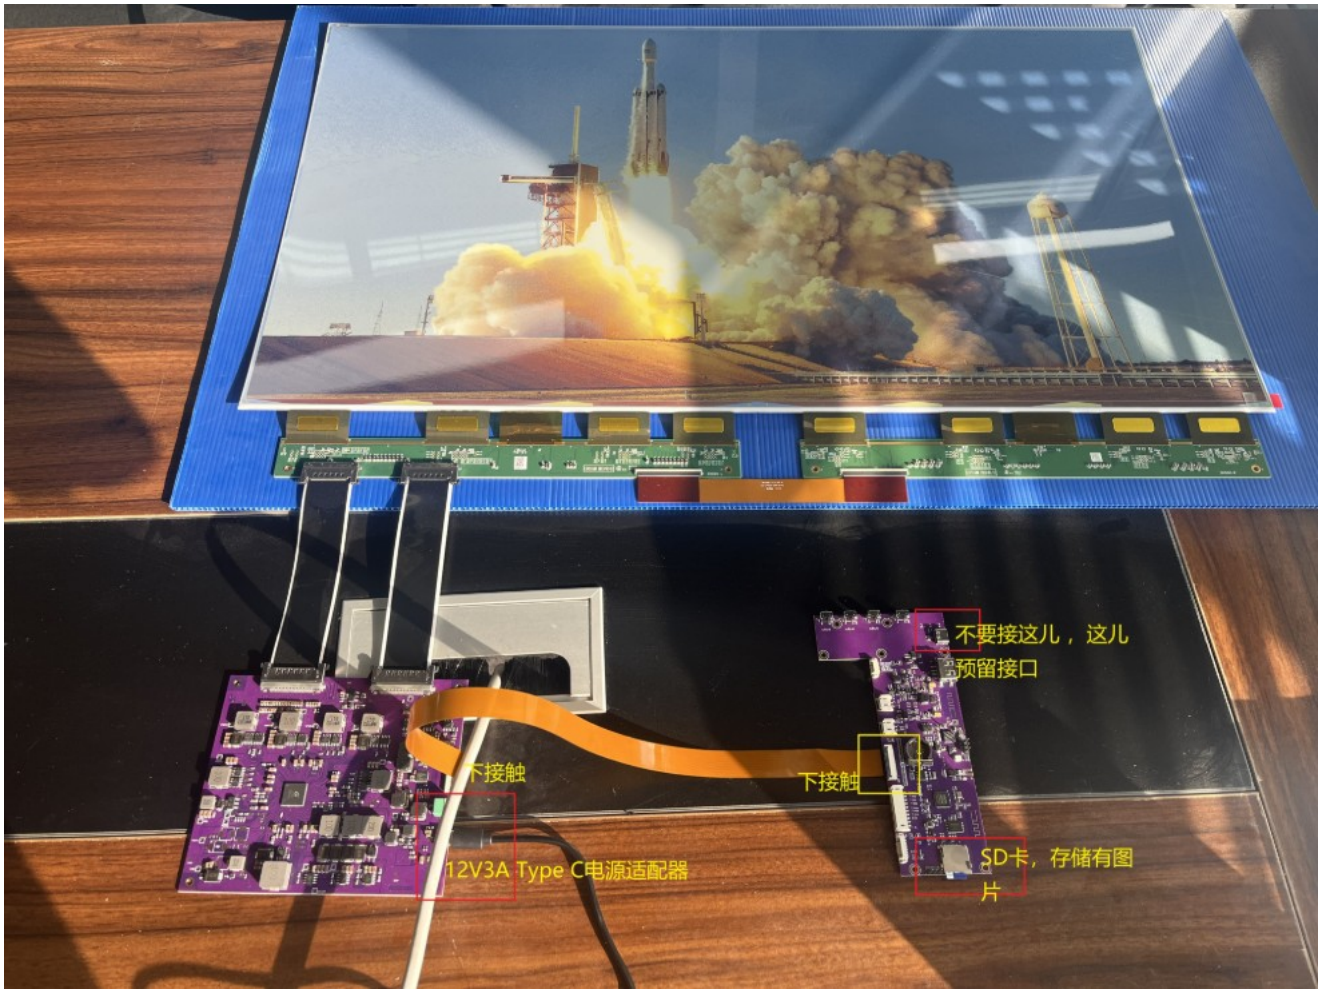

Actual result | 31.5-inch E6 full-colour e-paper module and board set (DataDelta adaptive pipeline)

01 BLE provisioning

Fast device discovery. Network credentials are delivered over BLE, with a low-power design throughout provisioning.

02 Wi-Fi image transfer

High-resolution images are sent over 2.4 GHz Wi-Fi, either through the device's own access point or through a router in STA mode.

03 Static display, ultra-low power

The image holds without refreshing. The frame runs from an adapter or a Li-ion battery, sleeps at low power, and that is what produces the extended standby.

DATADELTA IMAGE ENGINE DataDelta adaptive image processing

01
Adaptive resizing
Fitted to 2560 × 1440

02
Brightness and contrast
Highlights preserved

03
E6 COLOR MAPPING
Natural colour

04
Detail handling
Image detail retained

CORE SPECIFICATIONS Key specifications

Display	31.5-inch E6 full-colour	**Resolution**	2560(H) × 1440(V)
Active area	696.32 × 391.68 mm	**PPI**	94
Colours	Black / White / Red / Yellow / Green / Blue	**Storage**	32 GB SD card
Board	BK725X +ultra-low-power BLE SoC + power board	**Connectivity**	BLE + 2.4 GHz Wi-Fi
Power	12 V 3 A adapter (Type-C) / optional Li-ion battery	**Network**	Device access point / router STA
Enclosure	Acrylic · 743.52 × 453.47 × 39 mm	**Environment**	Operating 0~50°C / Storage -25~60°C
App support	Android 6.0+ / iOS 13.0+	**Image modes**	Fill and crop / Fit with margins / Custom crop / Custom rotation

WORKFLOW Process

BLE provisioning › **Wi-Fi transfer** › **Adaptive processing** › **E-paper refresh** › **Sleep • extended standby**

Note: an e-paper image holds without refreshing; consumption depends on network state, refresh rate and sleep settings. The frame runs from a 12 V 3 A adapter or a Li-ion battery, covering both long-term wall display and standby. It describes a demo configuration — enclosure, power and features can be customised, and the customer-confirmed specification takes precedence.