


RG / ARG 系列 15~22

Dimensions for RG - Types (mm)

Types	Weight (kg)	a	b	ϕ dh6	e	f	g	n2	0	р	х
RG3-15-2MCRF RG4-15-2MCRF	0,71 0,86	102 121	63 "	15 "	36 "	32 "	M5 "	24	53 "	16 "	15,5 "
RG3-20-2MCRF RG4-20-2MCRF	1,33 1,53	124 133	84	20	70 "	40	M6 "	37.5	68	17,5 "	21
RG3-22-2MCRF RG4-22-2MCRF	1,33 1,53	124 133	84	22	70 "	40	M6 "	37.5	68	17,5 "	21

RG - Types

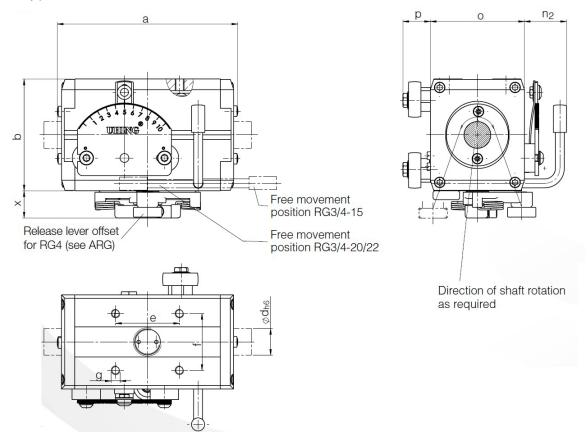



RG/ARG系列 15~22

Additional dimensions for ARG - Types (mm) Types h1 h2 l1* s x Angle L ≥							Thrust	Technical details Iding torque drive Mo (Ncm)	max. pitch/ shaft rotation h (mm)
Types	111	112	11"	S	Х	Angle L ≥	FRG (N)	IVIO (INCITI)	11 (111111)
RG3-15-2MCRF RG4-15-2MCRF	75 "	112	150 180	53 "	53 53	750 "	110 220	2,5 4,8	11,1
RG3-20-2MCRF RG4-20-2MCRF	104	145	200 210	80	63 63	850 "	160 320	2,5 5,1	15,5
RG3-22-2MCRF RG4-22-2MCRF	104	145	200 210	80	63 63	850 "	160 320	2,5 5,1	16,5 "

ARG - Types

