
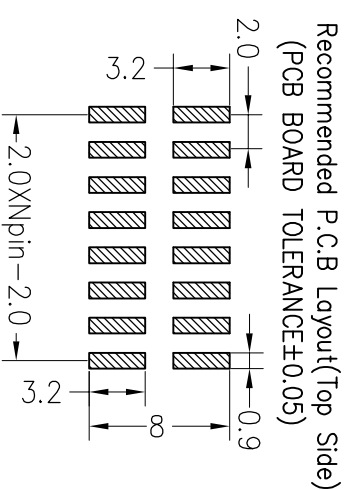


**SPECIFICATIONS**



Rated Current:1.50AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:800MΩ Min  
Operation Temperature:−40℃ to +105℃  
Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA9T  
Max.Processing Temp: 230℃ for 30-60 seconds  
(260℃ for 10 seconds)

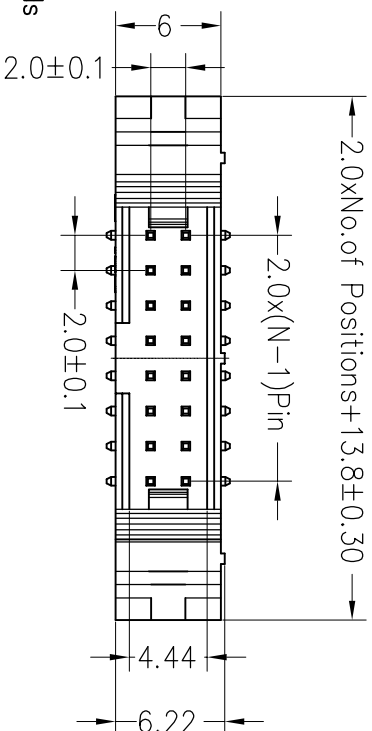

**Ordering Information**

3321 XX M XX X B L X01

- No. of Pins 10--50
- Contact Plating G0: Gold Flash
- Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA6 E=BK-PA9T F=BK-LCP
- Color Type B=Black G=Grey
- Packing O=Fe Bag A=Tray T=Tube R=Reel+Cap
- SK: Tin
- SK: Matte-Tin

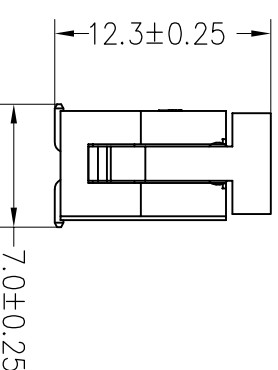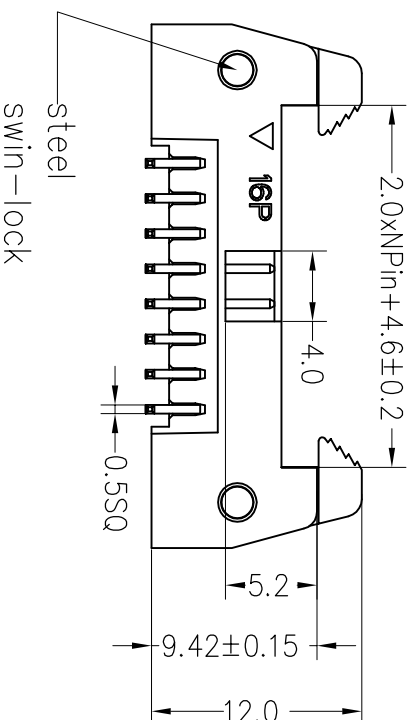

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	OPERATION	SCALE	FIT	PART NO.	TITLE:
	A0	2020.04.21	NEW DRAWING		Angle	±3°		X.XXX ±0.10	SIZE	A4		
B	1							X.X ±0.30	UNIT	mm	3321XXMXXXB L X01	2.0 ejector header Npin SMT
	2							X.XX ±0.20	CHECK			
C	3							X.X ±0.30	SCALE	FIT	jiln® 深圳市锦凌电子有限公司	SHENZHEN JINLING ELECTRONIC CO.,LTD
	4							X.XX ±0.20	UNIT	mm		
D	5							X.XX ±0.20	SIZE	A4	Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892	SHENZHEN JINLING ELECTRONIC CO.,LTD
	6							X.XX ±0.20	SIZE	A4		
E	7							X.XX ±0.20	SIZE	A4	3321XXMXXXB L X01	2.0 ejector header Npin SMT
	8							X.XX ±0.20	SIZE	A4		
F	9							X.XX ±0.20	SIZE	A4	3321XXMXXXB L X01	2.0 ejector header Npin SMT
	10							X.XX ±0.20	SIZE	A4		
G	11							X.XX ±0.20	SIZE	A4	3321XXMXXXB L X01	2.0 ejector header Npin SMT
	12							X.XX ±0.20	SIZE	A4		