







产品设计安全规范:

1. VBAT, IOVDD的电容必须保证质量和容量, 电容耐压值应大于工作电压一倍以上;

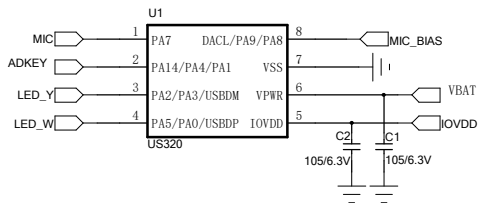

注意事项:

- VBAT输入电压 $\leq 5V$;
- IO VDD(3.3V/100mA@0.3Vdrop)常输出状态, 电压档位可调, 软件无法关断(软开机方案注意避免漏电);
- 必要测试点: VBAT, USBDM, USBDP, VSS;
- MIC等模拟信号必须远离PWM, CLK, DAT等数字翻转信号, 避免干扰;

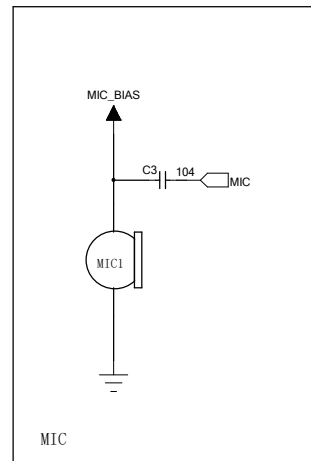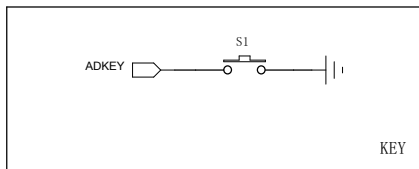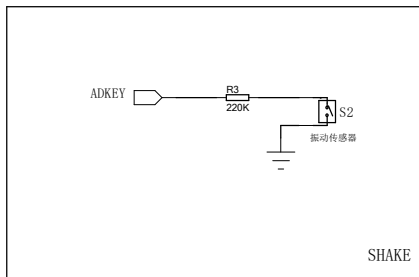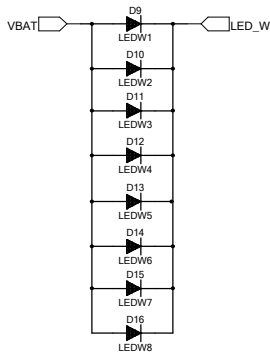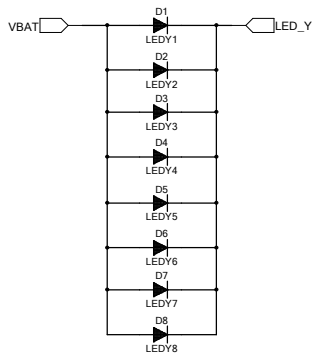

Title US320 BAT+key+shake圈灯直驱原理图V1.0		
Size A4	Number 2024.05.29	Revision
Date:	Sheet of	
File:	Drawn By:	