
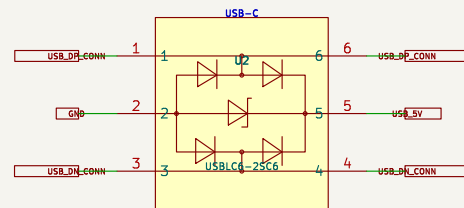




























**B – Power input, USB and always-on rails**

ARE THE ELECTRICAL CONNECTIONS. DNP = assembly option / tuning footprint.



RF values are starting values; tune on the installed door  
Connectivity generated from tools/design\_data.py

DIY engineering prototype

Title: HomeKey-Lock-RevA-PN7161 - Power input, USB and always-on rails

|                                            |                  |         |
|--------------------------------------------|------------------|---------|
| Size: A2                                   | Date: 2026-08-27 | Rev: A  |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 |                  | Id: 1/1 |