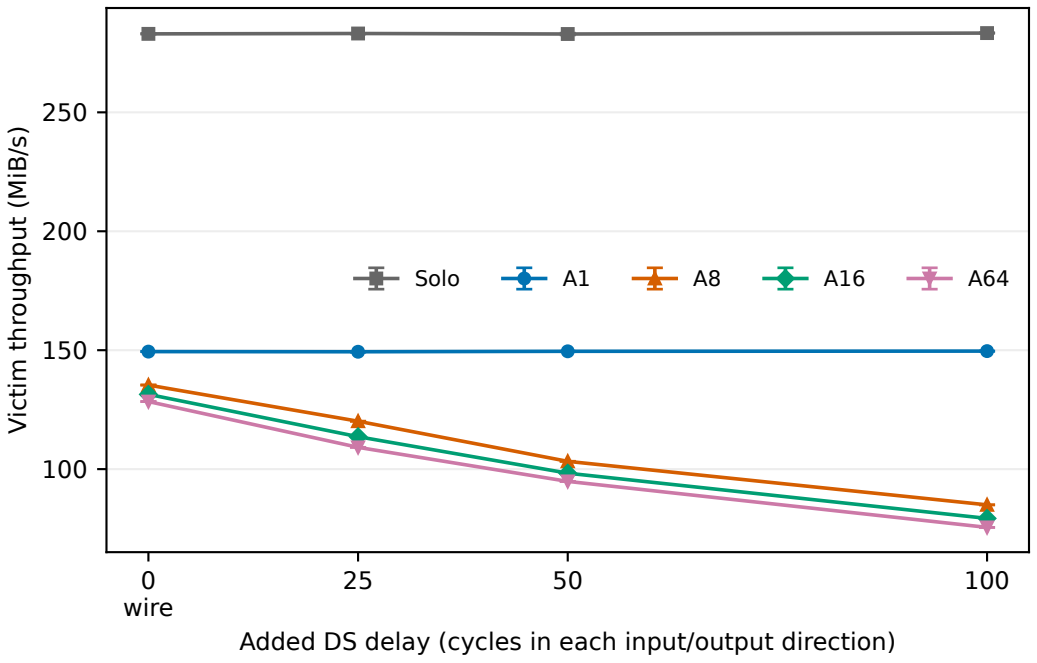
Victim throughput (MiB/s)
250
200
150
100
Solo
A1
A8
A16
A64
0
wire
25
50
100
Added DS delay (cycles in each input/output direction)