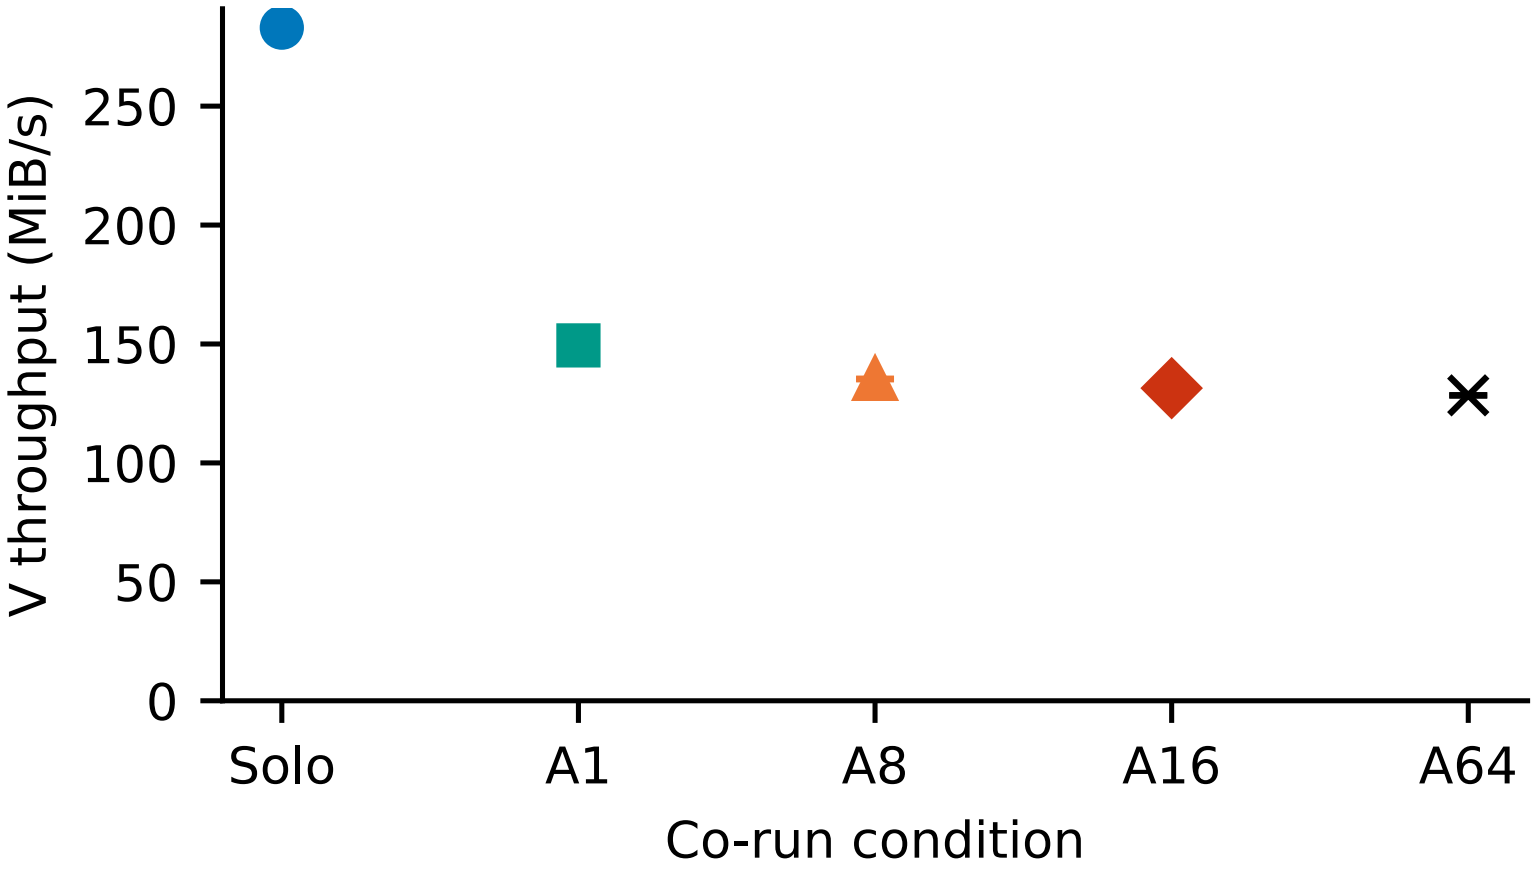
(a) DS0 direct wiring; n=10/condition
V throughput (MiB/s)
250
200
150
100
50
0
Solo
A1
A8
A16
A64
Co-run condition

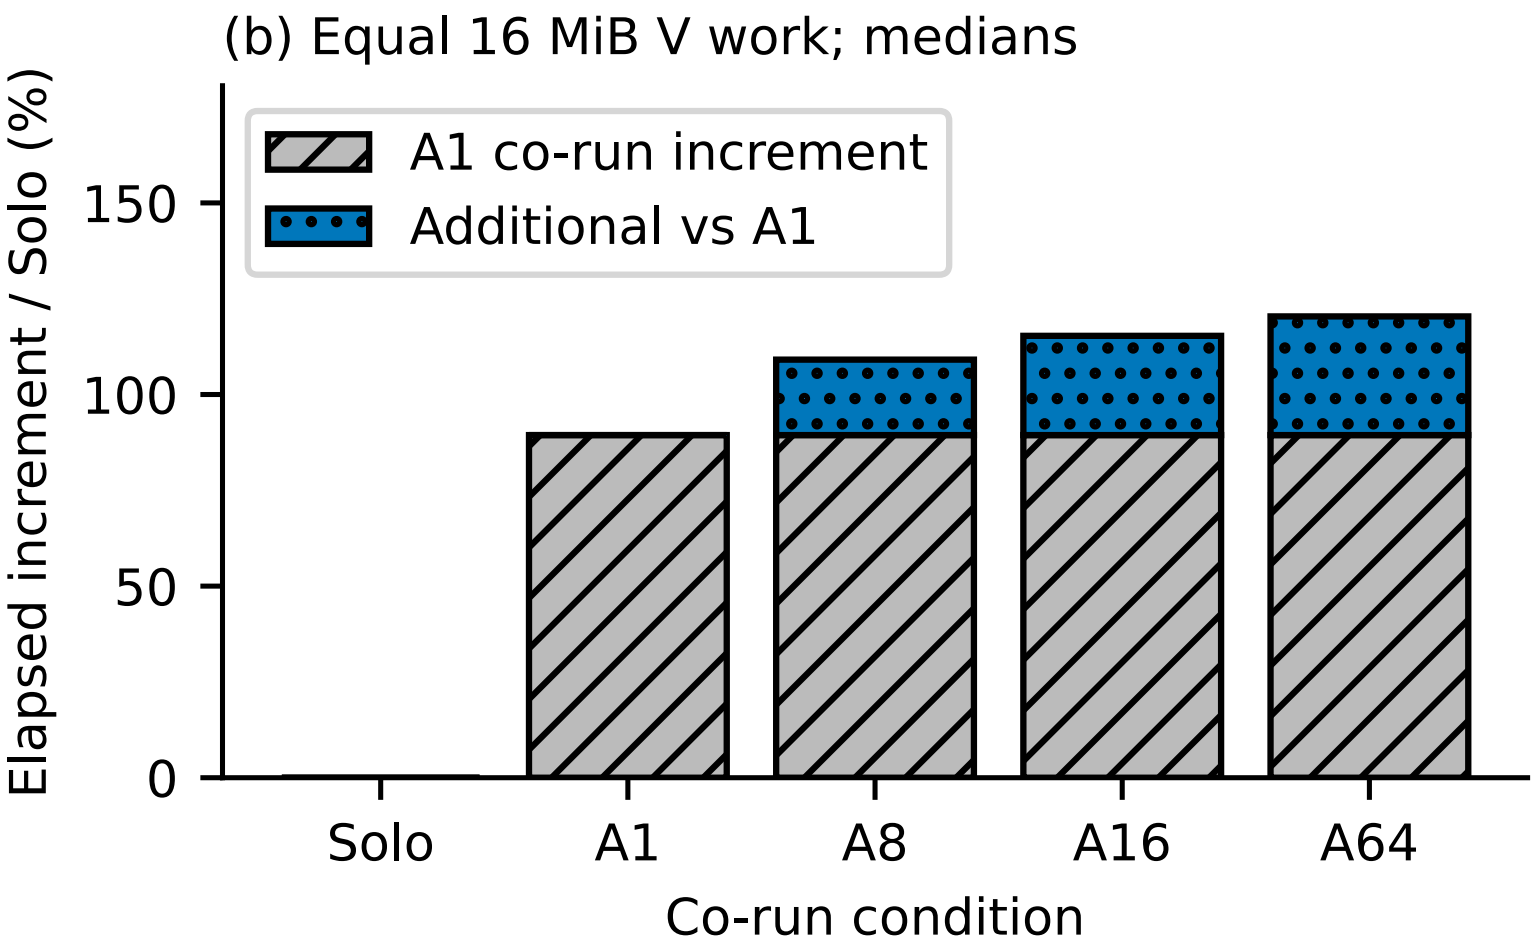
(b) Equal 16 MiB V work; medians
A1 co-run increment
Additional vs A1
Elapsed increment / Solo (%)
150
100
50
0
Solo
A1
A8
A16
A64
Co-run condition