

Rubber Endstop Buffers• cylindrical

25150.0352



Product Description

To be used as an elastic end-stop, bearing foot etc.
The hardness is 55 – 5° shore A. Further shore hardnesses (40 – 5° shore A and 70 – 5° shore A) on request.

Material

Support washer

- Steel, galvanized, blue chromated


Threaded bushing

- Steel, galvanized, blue chromated


Body

- Natural rubber (caoutchouc NR), black

Drawing

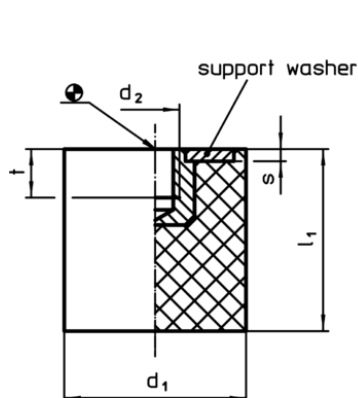

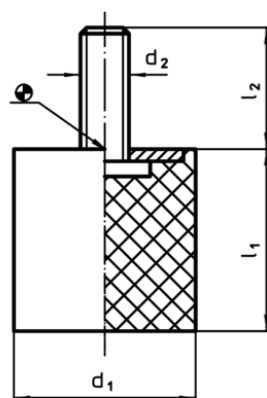

picture 1



picture 2

Order information

Dimensions					Spring rate R	Load capacity	Spring range			Art. No.	
d ₁	l ₁	d ₂	s	t	~	max.	~	min.	max.		
[mm]					[N/mm]	[N]	[mm]	[°C]			[g]
with female thread – picture 1, Steel											
50	30	M10	2	7	327	2453	7,5	-30	80	100	25150.0352

Application example

