

---

Group 18: Mars Rover Project Report

---

Authors

Aixin Zhang  
CID: 01738988  
az419@ic.ac.uk

Ebby Samson  
CID: 01737449  
es1219@ic.ac.uk

Igor Dmytrovich Silin  
CID: 01756268  
ids19@ic.ac.uk

Kaling Ng  
CID: 01737644  
kln19@ic.ac.uk

Nur Izzah Mohd Zafer  
CID: 01738670  
nim19@ic.ac.uk

Xin Wang  
CID: 01735253  
xw2519@ic.ac.uk

# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Project Management</b>               | <b>3</b>  |
| 1.1      | Conception and Initiation . . . . .     | 3         |
| 1.2      | Definition and Planning . . . . .       | 4         |
| 1.3      | Performance and Control . . . . .       | 5         |
| 1.3.1    | Project timeline . . . . .              | 5         |
| 1.3.2    | Gnatt chart . . . . .                   | 5         |
| 1.3.3    | Team communication . . . . .            | 6         |
| <b>2</b> | <b>Rover system design</b>              | <b>7</b>  |
| 2.1      | Structural design . . . . .             | 7         |
| 2.2      | Functional design . . . . .             | 8         |
| 2.3      | Intellectual property . . . . .         | 9         |
| <b>3</b> | <b>Rover Submodules</b>                 | <b>10</b> |
| 3.1      | Command . . . . .                       | 10        |
| 3.1.1    | Design . . . . .                        | 10        |
| 3.1.2    | Communication protocol . . . . .        | 10        |
| 3.1.3    | Frontend . . . . .                      | 11        |
| 3.1.4    | Backend . . . . .                       | 12        |
| 3.1.5    | Database . . . . .                      | 13        |
| 3.1.6    | Security . . . . .                      | 13        |
| 3.2      | Control . . . . .                       | 14        |
| 3.2.1    | Drive confirmation . . . . .            | 14        |
| 3.3      | Vision . . . . .                        | 15        |
| 3.3.1    | Implementation problem . . . . .        | 15        |
| 3.4      | Drive . . . . .                         | 16        |
| 3.4.1    | Design . . . . .                        | 16        |
| 3.4.2    | Movement . . . . .                      | 17        |
| 3.4.3    | Position Control . . . . .              | 17        |
| 3.4.4    | Speed Control . . . . .                 | 18        |
| 3.4.5    | Optical Sensor . . . . .                | 19        |
| 3.4.6    | Advanced features . . . . .             | 19        |
| 3.5      | Energy . . . . .                        | 20        |
| 3.5.1    | Battery Charge Profile Design . . . . . | 20        |
| 3.5.2    | Battery Balancing Algorithms . . . . .  | 21        |
| 3.5.3    | State of Charge . . . . .               | 22        |
| 3.5.4    | PV MPPT Algorithms . . . . .            | 23        |
| 3.5.5    | Circuit Design . . . . .                | 24        |
| 3.5.6    | State of Health . . . . .               | 24        |
| 3.5.7    | Energy to Control interface . . . . .   | 25        |
| <b>4</b> | <b>Integration</b>                      | <b>26</b> |
| 4.1      | Testing . . . . .                       | 26        |
| 4.2      | Vision . . . . .                        | 26        |
| 4.3      | Energy . . . . .                        | 26        |



# 1 Project Management

The project team utilised the Project Management Institute's 5 Phases of Project Management <sup>1</sup> as a guide to ensure all aspects of project planning and management are captured in the team's project management approach.

Project management was split into 3 areas, each covering a important section of project management.

## 1.1 Conception and Initiation

**Project definition:** Design and build a rover system that has autonomous capabilities to detect, avoid and transmit the locations of the obstacles i.e. coloured balls to a server that users can interact with.

**Project requirement:** The rover system is split into 5 modules, each with its own requirements:

- Command:
  - Enable bilateral communication between user and Control module
  - Enable users to navigate the rover
  - Plot a map of the locations of the obstacles encountered by the rover
- Control:
  - Enable bilateral communication channels between Command, Drive, Energy and Vision modules
- Drive:
  - Defines the operation of the two rover motors such as:
    - \* Speed control
    - \* Direction control
    - \* Turning method
  - Using the optical flow sensor, measure the distance travelled by the rover
- Energy:
  - Battery charge operation: Profile design, status estimation and melt/explosion prevention
  - Battery voltage balancing and range estimation
  - Implementing PV MMPT calculation algorithm
  - Integrating and testing solar charging system
- Vision:
  - Using the on-board camera detect, avoid and record the location of obstacles encountered by the rover

---

<sup>1</sup>PMI: <https://www.smartsheet.com/blog/demystifying-5-phases-project-management>

## 1.2 Definition and Planning

The project team had a significant amount of freedom in designing and developing the rover system to meet the project requirements. The team had identified several design themes that guided the design and implementation choices made during the development of the rover system:

- **Modularity:**

Having taken into account that the project team spanned four countries with different time-zones and the time constraint of the project, the team felt it was important to incorporate modular design in the development of each rover modules.

The approach meant each subsystem only had to ensure the pre-agreed connection interfaces such as WebSocket was compatible with the required modules. This was very advantageous due to the following:

- Each module could independently develop sections of the rover system. This made the team much more dynamic and efficient.
- The testing strategy <sup>2</sup> was more methodical and could occur early in stages, gradually leading up to a full rover system test.
- No unnecessary meetings. By reducing the number of meetings the team had, it meant less time was wasted on arranging a time suitable for three time-zones and team meetings were more productive.

- **Scalability:**

During the first meeting, the team was not certain as to the exact features that are desirable in a rover system. Due to this reason, scalability was a critical consideration factor and gave the team a very flexible approach to the rover system.

An example would be the MongoDB database implemented by Command. MongoDB is a type of "NoSQL" database that is not as restrictive as traditional SQL databases which allowed the team to store new types of data without having to redesign the database model.

- **Open-source:**

Where possible, the team opted to use well-supported open-source development packages such as the FastAPI framework. This complimented modularity and scalability themes by ensuring the interfaces are industry-standard and could be easily modified to expand its capabilities.

Being well-supported, there is ample documentation to support the development and the codebase is well-designed. This meant that the team could reduce the number of unknown bugs, decrease development time and ensure a high-quality codebase.

- **Minimalism:**

Due to the open-ended nature of the project, the team did not want to limit the scope of their design but, at the same time, did not want to risk a bloated and inefficient rover system due to feature creep and badly integrated modules.

The team determined any design choice would need to prioritise efficiency and scalability. All libraries are to be lightweight and only need to support the required features.

---

<sup>2</sup>Testing was managed by the Integration module

### **1.3 Performance and Control**

#### **1.3.1 Project timeline**

[Timeline chart image]

#### **1.3.2 Gnatt chart**

[Gnatt chart image]

### 1.3.3 Team communication

[Communication heirarchy chart]

During the first week of the project, the team implemented a communication hierarchy that showed the communication flow between each module and any related components between the modules. Due to the importance of Control and Integration, both modules are located at the top of the hierarchy.

The project team met twice each week on Wednesday and Sunday to ensure each module's progress was on track and the Control module was aware of any changes. The Control module was responsible for leading each session and taking the meeting minutes<sup>3</sup>.

---

<sup>3</sup>Example meeting minute avaiable in appendix

## 2 Rover system design

### 2.1 Structural design



Figure 1: Rover structural diagram

The team established the structural design of the rover system during the first week of the project timeline. The structural design is formed in three stages:

#### 1. Identifying the core module:

The Control module was designated as the core module of the rover system due to the ESP32 board's numerous communication interfaces and on-board data processing capabilities. With the remote nature of the project, this also meant the Control module will take the leadership role and act as the "heartbeat" of the team - ensuring each module development was in sync with the planned project timeline and each communication interface was compatible with Control.

#### 2. Module connection:

With the role of Control established, the team could discuss how to structure the other modules that best took advantage of the ESP32's capabilities, ensured efficient operation in various environments and complimented the *scalability* design theme.

A major design problem was the location of processing the data from sensors like the optical sensor. The team chose to do as much processing locally on the ESP32 because the connection with Command module servers naturally has a certain degree of latency and Control was best equipped module on the rover to handle the processing. The Control module can also pre-process data to minimise the amount sent to Command and reduce the end-to-end latency of the system.



### 3. Communication interface selection:

In the second stage, the Control module worked with each module to research and select the most suitable communication interface. This was critical to establish the interfaces early on to allow the modules to start development as soon as possible and asynchronously as mentioned with *modularity* design theme.

The biggest concern was the type of connection between the Control module and Command server. The form of connection had to be energy efficient to compliment the *minimalism* design theme and be able to scale easily depending on the data generated from the rover. The final design choice was to use the WebSocket protocol since it was native to the FastAPI framework used by Command and allowed real-time updates to the user. Compared to the HTTP protocol, the WebSocket protocol has a higher performance rating at 83 ms on WebSocket and 107 ms on HTTP for an average single request [4].

## 2.2 Functional design

The team defined the rover system into three functional layers that each handled a different aspect of the system.

## 2.3 Intellectual property

Intellectual property rights are managed and enforced by the World Intellectual Property Organisation and are supposed to protect creations of the mind” through concepts such as patents for inventions, and copyrights for logos and software. Provided the inventor files himself or through a patent company and is granted IP protection by an IP office such as the U.K. Intellectual Property Office, it allows the holder of the IP to treat it as a tangible asset and reduce the risks of associated with commercialisation. This, theoretically, fosters innovation.

However, the team firmly believes that space technologies like the Mars rover should not be patented. In traditional sectors like space, well-established entities like NASA hold majority of the patents related to it – NASA holds 1600[5] patents while the Indian ISRO only holds 270 [3]. With more companies and countries looking to advance into the space sector, IP laws stifle any potential innovation by increasing the cost and length of development. This directly goes against the fundamental reason of space exploration – advancement of science and exploration of the unknown for the benefit of all humankind. Not for the benefit of a single race or country.

With that mindset, the team endeavoured to use as much open-source software as possible. For example, the Drive module uses the Arduino Serial Peripheral Interface (SPI) and INA219\_WE library. The Command module uses the FastAPI framework for servers and React for UI design. Depending on the license of the open-source software used and the wording of the patent application, it could affect the success of filing of a patent if the team wanted to patent any component that used the open-source software. These factors are reasons why it is best to hire a professional patent attorney such as Carpmaels & Ransford LLP.

## 3 Rover Submodules

### 3.1 Command

#### 3.1.1 Design

The Command module was an important component of the rover system as it was the bridge to the database and the user. Because of the user aspect, the system had to consider other factors such as UI and UX in addition to traditional factors like efficiency. A middle-ground had to be found in order to balance between various factors since some system designs may be more user-friendly but less efficient.

#### 3.1.2 Communication protocol

During the research phase of the project, the Command module looked into various communication protocols like HTTP, MQTT and WebSocket. In collaboration with the Control module, the following requirements on the communication protocol were identified:

- **Real-time:** The selected communication protocol would need to support real-time operations such as navigating the rover ,and receiving rover status and coordinates as it was updated.
- **Well-supported:** The Command module was required to communicate with the rover through the Control module which was a ESP32 board and was programmed using the Arduino language. Following the open-source and modularity theme, any libraries used by Command and Control needed to be well-documented and well-supported by both modules.
- **Energy efficient:** Any communication protocol would have to be lightweight in order to keep the Mars rover as efficient as possible.

The WebSocket protocol was ultimately chosen as the communication protocol. The protocol supported duplex communication and service push is built in unlike HTTP which used polling. While WebSocket is a relatively new protocol, it is well-supported and well-documented by Arduino and the Python which was used by the Command module.

The performance of both WebSocket and MQTT protocol are both higher in terms of speed and packet-sizes when compared to HTTP but MQTT was not chosen due to the Minimalism design theme. The Mars rover system only consisted of one rover that only connected to the Command server. WebSocket protocols were designed to support such point-to-point communication while MQTT contained several overheads to enable it to communicate with multiple parties. In addition, Websocket libraries are more common and well-documented than MQTT libraries. This made WebSocket the logical choice.

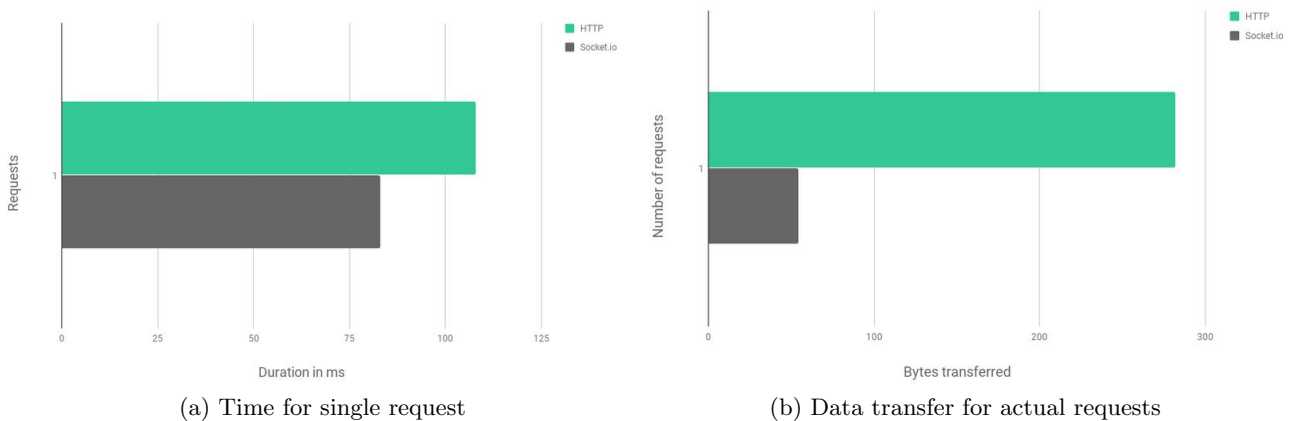


Figure 2: Comparison of HTTP and Websocket protocols [4]

### 3.1.3 Frontend

The website of the Command module was created with React which is a JavaScript library that combined the speed of JavaScript with more easier method of rendering webpages that are highly dynamic and responsive to user input. Due to its component design, it naturally compliments the project's Modularity and Scalability design theme. React is well-documented which made it easier for beginners to start developing quickly.

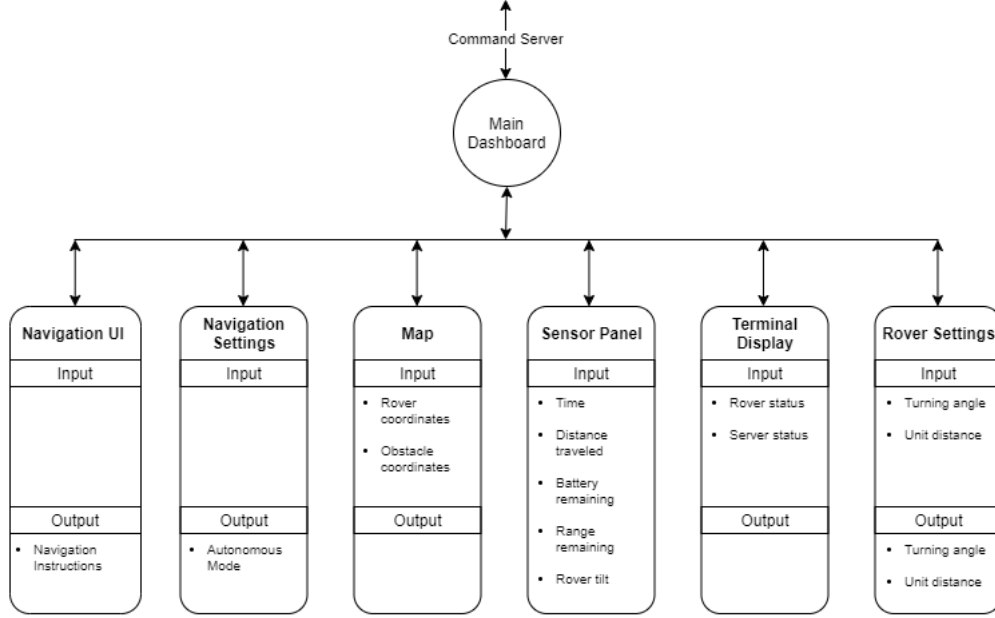


Figure 3: Frontend functional diagram

Due to the frontend being the point at which the user interacts with the rover system, UI and UX design factors were important factors of consideration in addition to scalability. The website was custom built without any templates and used the wireframe method to model the website for team feedback before implementation. The following design choices were made with these taken into account:

- **Simplicity:** The Command interface must be minimal, allowing the user to intuitively interact with the system. All rover information and actions must be easily seen and not require users to navigate around to find the information they need.

To meet this design choice, the website only has one page that is divided into six grids that each contain a component of the rover's command system such as the map and rover navigation interface. This one-page design meant users do not have to click around to find information. The user would log in using their credentials and immediately be able to see key rover details in one glance.

- **Scalability:** Due to the open-endedness of the project requirements, the exact number of features to implement was not known. In order to prevent the Command module from limiting the number of features the rover system has, the system must be designed to be able to scale and add new features easily.

Taking advantage of components in the React framework and the grid like design of the website, each grid was defined as a component which itself contains sub-components like buttons and display fields. This allows Command to easily add or modify components to enhance the website's features. For example, the map component was modified throughout the project timeline to include features like the animated rover icon that showed the direction the rover is facing and the gray pathway that showed the previous rover locations.

### 3.1.4 Backend

The Command server was implemented with the open source python-based FastAPI framework. The python language was an important feature as the team felt comfortable using Python due to its readable and extensive well-documented libraries.

The main concern of using Python as the server language was the relatively slow performance when compared to such as C++ and JavaScript. However, with the addition of Starlette and Pydantic, FastAPI is on par with frameworks like NodeJS and Go.

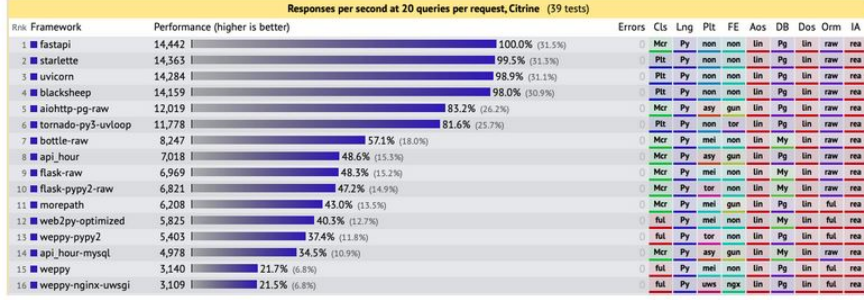


Figure 4: Benchmarks of framework performance [6]

Being open-source, its interfaces are based on open standards for APIs which allowed easy connection to third-party services like authentication servers and databases. These features make the server design modular and scalable which was what the rover system required.

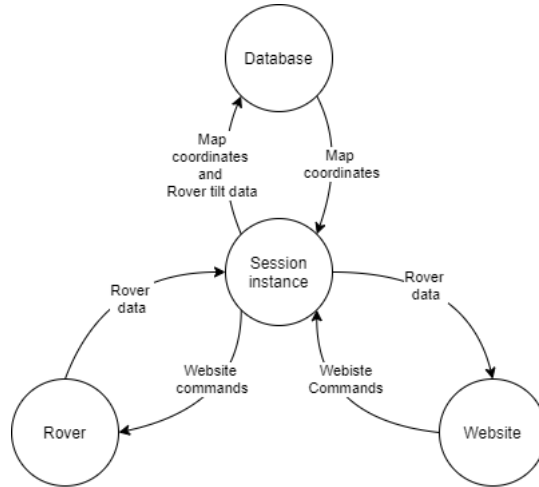


Figure 5: Backend context diagram

The function of the server was to basically act as a data hub that directs incoming data to the correct recepients. For example, all incoming data from the rover will be redirected to the website where it will be processed client-side. The only exception was map coordinates and the rover tilt measurements that are copied and redirected to the database component for storage.


### 3.1.5 Database

The database component used MongoDB which is a NoSQL database. The design choice was based on the following advantages of MongoDB:

- **Document-oriented:** MongoDB stores data in JSON-like objects and are non-relational. This allowed the Command module to store any records without having to specify a schema for the database. This meant any new features that generated new forms of data would not require modifications to the data-structure thus improving the system's scalability potential.
- **Ease of use:** MongoDB is compatible and well-documented on JavaScript and Python which is used in the Command module. In addition, MongoDB has an online intuitive database management system which helped in viewing the data stored in real-time.
- **Mature ecosystem:** Development can occur locally during testing and be easily ported into MongoDB Atlas which is a public server for deployment.

### 3.1.6 Security

Where users are concerned, the team believed that security needed to be incorporated into the design to prevent any unauthorised access to the rover system.

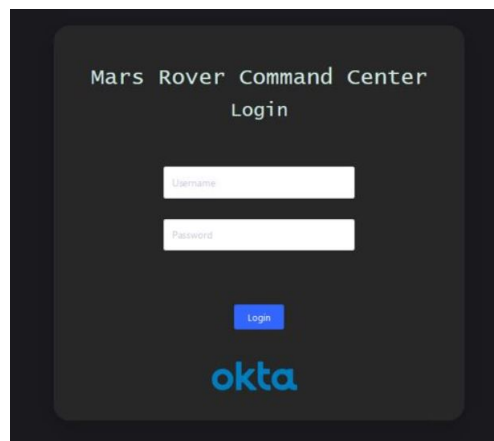

The Command module features a single-sign-on "Log In" page that prompted the user to authenticate themselves. The authentication system was implemented with Okta which provided an authentication server. Services like Okta are more secure than creating a custom authentication system especially with the constrained project timeline. Any custom authentication system has the inherent security risks due to a rushed development and lack of expertise in such domain compared to a well-established like Okta.

The design of the authentication system incorporating Okta is shown below:

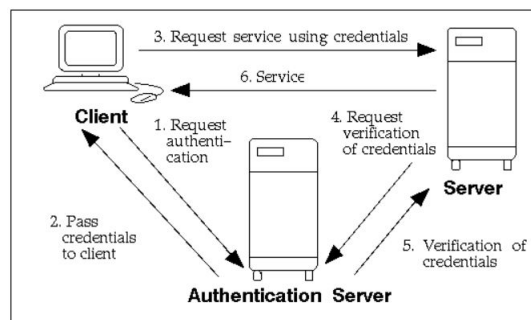


Figure 6: Authentication system design [7]

## **3.2 Control**

### **3.2.1 Drive confirmation**

### **3.3 Vision**

#### **3.3.1 Implementation problem**



### 3.4 Drive

The design of the Drive module was based off the Drive requirements stated in the project requirement section of the report (Page 2).

#### 3.4.1 Design

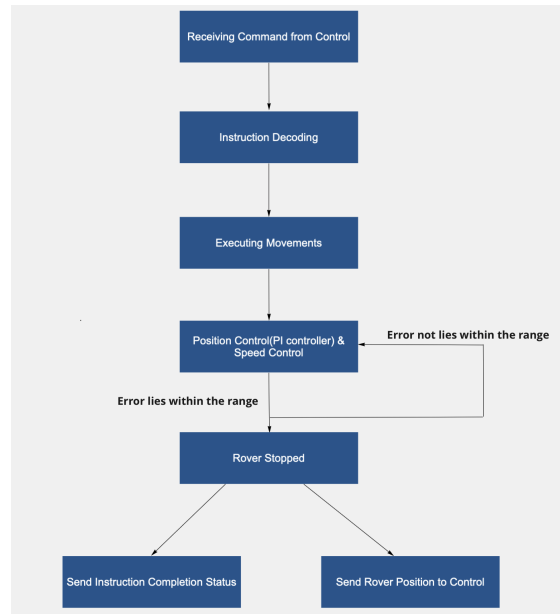


Figure 7: Drive functional diagram

The Drive receives navigation instructions from the Control module and was designed to give user full control over the distance a rover goes per instruction and angle that the rover turns. The Drive instruction was defined as:

$$[\text{Action}] + [\text{Turning angle}] + [\text{Distance}]$$

where:

- [Action]: Forward (F), Backward (B), Left (L), Right (R), Stop (S), Emergency stop (X)
- [Turning angle] and [Distance] defines the position and speed control mechanisms

The instruction decode structure is shown below:

---

```
if(String(instruction[0]) == "F") { // Moving Forward
    F = true;
    target_x = 0;
    // Convert to target distance
    target_y = 100*(String(instruction[3]).toInt()) + 10*(String(instruction[4]).toInt()) +
        (String(instruction[5]).toInt());
    B = false;
    L = false;
    R = false;
    S = false;
    // Accumulate distance or angle
    tmp_x = total_x + target_x;
    tmp_y = total_y + target_y;
}
```

---

### 3.4.2 Movement

By using the H-bridge circuit, the DC motors of the rover supports four main movement directions: Forward (F), Backward (B), Left (L), Right (R).

Forward and backward movement was achieved by enabling the H-bridge, setting the PWM signals and the motor states. For example, the code below defines forward movement:

---

```
void MovingForward() {
    digitalWrite(pwmr, HIGH); // Setting right motor speed at maximum
    digitalWrite(pwml, HIGH); // Setting left motor speed at maximum
    // Set motor state
    DIRRstate = LOW; // LOW - Forward, HIGH - Backward
    DIRLstate = HIGH; // HIGH - Forward, LOW - Backward
    digitalWrite(DIRR, DIRRstate);
    digitalWrite(DIRL, DIRLstate);
}
```

---

Turning left and right was achieved by setting the respective wheel state to LOW. After turning, any distance change was in the x-direction and would equal the circumference defined by the rover's optical sensor. Turning angles were defined from the point where the circle's radius was the distance between the optical sensor to the midpoint along the rover shaft which was measured as 15 cm. It was detected that the two wheels do not output the same amount of power. This affected the turning angle calculations since the circle radius i.e. the distance between the optical sensor to the midpoint along the rover shaft was 12.7 cm and calculations had to be compensated as shown below:

---

```
float Angle_Conversion(float target_angle) {
    return (target_angle/90)*28; // Convert input angle to distance along x-axis
}
```

---

The halt instruction was implemented by disabling the H-bridge and set the PWM signal feeding into the left and right wheel pins to LOW.

### 3.4.3 Position Control

The rover's position control was implemented with a closed-loop PI controller which used the error margin between the current rover position and the previous rover position. The logic was that if the rover moved forwards and backwards by 20 cm and the optical sensor detected that the rover did not reverse 20 cm, the error margin would be the difference between the current rover position and the previous rover position.

The controller was designed such that if the error margin was either in the range  $-0.5 \text{ cm} < \text{error in } y < 0.5 \text{ cm}$  or  $-0.2 \text{ cm} < \text{error in } x < 0.2 \text{ cm}$ , the controller would consider the difference insignificant and rover would stop. Otherwise, the rover would either keep executing the current instruction or perform the reverse movement until it was within the error margin.

---

```
if(F){ // Forward movement position control
    err_y = total_y - tmp_y; // Calculate error
    cp = pi_d(err_y);
    Speed_Control(min(abs(cp)*0.01+0.4), 0.7); // Using PI controller result to control speed

    // Position Control
    if(err_y < -0.5) { MovingForward(); }
    if(err_y > 0.5) { MovingBackward(); }

    if(err_y > -0.5 && err_y < 0.5) {
        // First time the error lies in the given range
        if (firstTime) {
            instructionCompleteTime=millis();
            firstTime=0;
        }
    }
}
```

---

```

    }

    // Check the motion after 10sec for position correction
    if(millis()-instructionCompleteTime > 10000 && !firstTime && !instructionCompleted) {
        Stop();
        instructionCompleted=1;
        Send_Instruction_Completed(total_y,1,'F');
    }

    Stop();
}
}

```

---

The initial design for position control was a P controller which could achieve proportional controlling but the settling time is too long as a result of the steady-state error. By adding the I (Integral) controller, the steady-state error effect was mitigated. The best effect of the PI-controller was achieved by setting  $K_p = 1$  and  $K_i = 1$ . Taking advantage of the closed-loop control strategy, position control and speed control were linked together to achieve more advanced features that are elaborated in the next section.

As an additional feature of position control, Drive module returns a SUCCESS signal to the Control module once an instruction was successfully completed. After 20 seconds, if the instruction was still not completed, the Drive module will return a FAIL signal and stop the rover immediately to await further commands. These signals can be directed to the Command module to display the rover's movement status on the Terminal interface built into the Command website and, with the WebSocket connection, gives real-time feedback on the rover's Drive status.

#### 3.4.4 Speed Control

The speed control was achieved by using the PWM signals as inputs into the SMPS board duty cycle to control the output voltage applied to the motors. The implementation of speed control is shown below:

```

void Speed_Control(float duty){
    // Use duty cycle as argument to control voltage thus control speed
    analogWrite(6, (int)(255-duty*255));
}

```

---

By inputting the position error in either the  $x$  or  $y$  direction into the PI control function, its output was inputted into the speed control function. After testing and calibration, the duty cycle input function was determined as:

$$(\text{error from PI controller} \times 0.01) + 0.4$$

where 0.4 was the minimum voltage required to activate the rover. If the rover stays at a place for a long time, due to the presence of the integral controller, the error would accumulate as time increases and the speed control function will increase the rover speed to correct the error. Through testing, the rover initially accelerated due to a significant initial error. As the rover approached the target, the rover decelerated, indicating that the measurements taken by the optical sensor were more accurate. This method effectively reduced the number of oscillations and resulted in a more accurate Drive performance.

By using the formula  $\text{speed} = \frac{\text{distance travelled}}{\text{timestamp difference}}$ , the relationship between the duty cycle and speed can be displayed as a look-up table as shown in Figure 8. This relationship formed the foundation of two advanced Drive features. By using the tilt data from the FPGA in the Vision component, the rover can detect when it is going up a slope and will increase the speed relative to when the rover is on a flat surface.

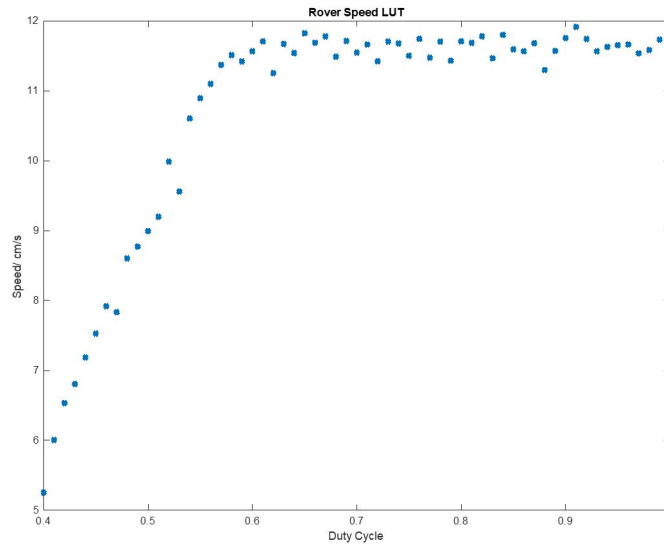


Figure 8: Relationship between the speed and duty cycle

In addition, Drive supports a power-saving mode where the duty would be fixed between 0.4 to 0.7 to conserve the energy used.

### 3.4.5 Optical Sensor

The optical sensor measures the distance of the rover travelled and the turning angle. To obtain more accurate measurements, the data type was changed from integer to float. The turning angle and travel distance was sent to the Control module for calculating the coordinates along  $x$  and  $y$  direction. The orientation was defined as:

- The  $y$ -coordinate or  $x$ -coordinate changes positively if the rover faces North or East respectively.
- The  $y$ -coordinate or  $x$ -coordinate changes negatively if the rover faces South or West respectively.

### 3.4.6 Advanced features

- Drive pausing:

By issuing the Pause (P) and Unpause (U) commands, the rover would stop and allow the Vision module to calibrate, detect and process the distances between the rover and an obstacle. During the pause, the rover will send the position of the rover. After the Unpause command is issued, the rover would continue executing the current set of instructions. The Arduino code for this feature is shown as follows:

---

```

if(instruction[0] == 'P'){ // Pause state
    Stop();
    while(!Serial1.available() || Serial1.peek()!='U') { // Unpause state
        delay(50); // Delay 50 ms
    }
    Serial1.read(); // Remove 'U' action word
    instructionStartTime=millis();
}

```

---

- Emergency Stop:

"Emergency Stop" action (X) is issued by Vision when a ball is in the path of the rover and would collide if the rover did not stop. The "Emergency Stop" is different from the standard "Stop" where if the "Emergency Stop" was used, the rover status will be updated to display an error has occurred which is not the case for the standard "Stop" action.

## 3.5 Energy

### 3.5.1 Battery Charge Profile Design

A battery charging profile ensures that the cells are charged to their full capabilities while within the constraints of the batteries which was max 3.6 V and min 2.4 for the battery. The capacity of the cells were determined by the following formula before developing the battery charging profile:

$$\text{Cell capacity} = \frac{\text{Discharging state time}}{3600} \times \text{current}$$

The Energy module developed its own charging code that used a combination of Constant Current (CC) and Constant Voltage (CV) instead of the original method in the provided code which only used Constant Current to charge the cells. Constant Current was used when the cell was nearly empty to prevent overheating during charging[1]. When the battery has been charged to 3500 mV i.e. around 90%, Constant Voltage was used to charge it to avoid overcharging.

The cell capacity measured by the provided standard code is 502 mAh while the cell capacity value measured by the custom charging code was around 565.07 mAh. This difference in measured cell capacity indicates that charging using a combination of Constant Voltage and Constant Current is more effective at fully charging the battery compared to using Constant Current only. The performance of the two charging methods over a period of time is shown below:

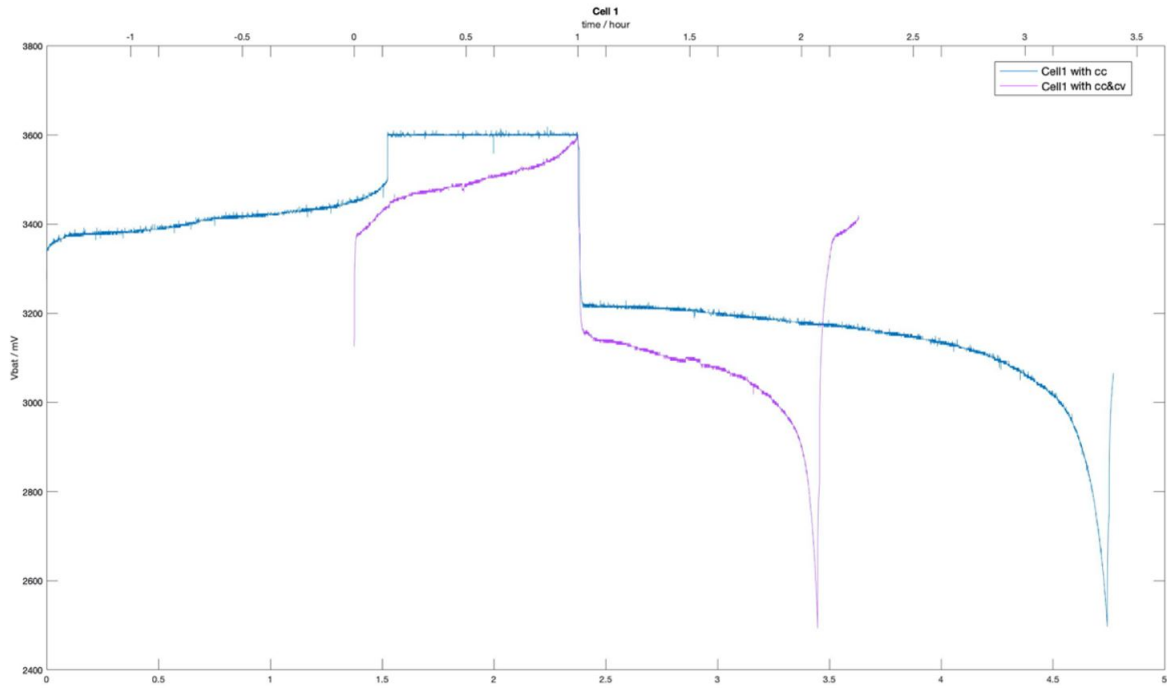


Figure 9: CC vs CC + CV performance comparison

### 3.5.2 Battery Balancing Algorithms

The Energy module was design to use three cells connected in parallel. As a result, in addition to ensuring that each cell had a similar voltage at the start of the charging process, balancing was also required during the charging process.

The balancing algorithm was design with 13 states and Figure 4 shows the transitions between each states.

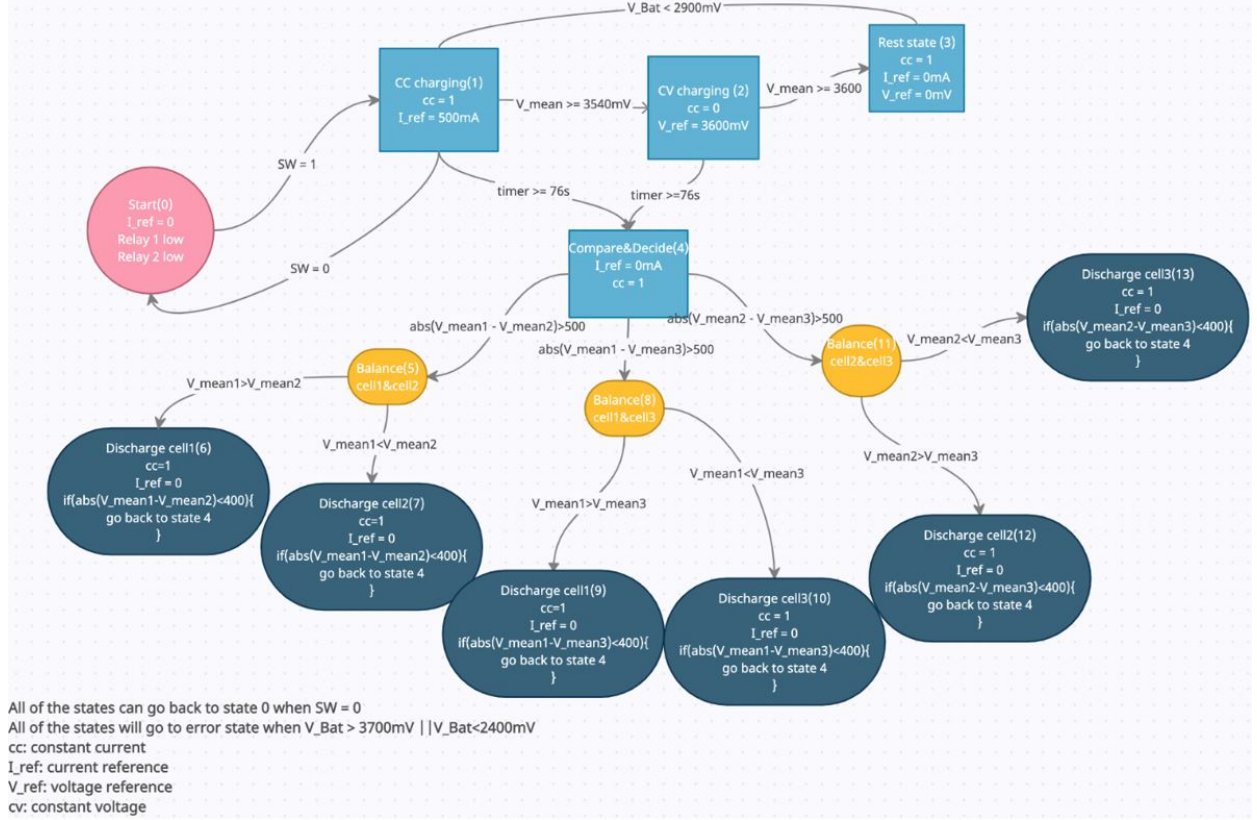


Figure 10: Balancing Algorithm State Flow

For example, in the constant current charging state, the batteries are charged for 60 seconds and each cell was measured for 5 seconds respectively. The average value of each cell was then calculated and the state transition to the comparison state. In the comparison state, difference between the mean of two cells was compared. If it was greater than 500 mV, the cells needed to be balanced and the higher-voltage cell would be discharged. The current state returns to state 4 after discharge to check if the difference between the other cell voltages was more than 500 mV. The process repeats itself.

### 3.5.3 State of Charge

The Energy module uses a combination of voltage lookup tables and coulomb counting to estimate the State of Charge. To obtain the voltage lookup table, a cell was completely charged and then discharged, the average value of the recorded cell voltage measured. To find the associated State of Charge at this voltage, the discharging process was stopped every 10 seconds and measurements taken.

The measured cell voltage from two different cells were plotted:

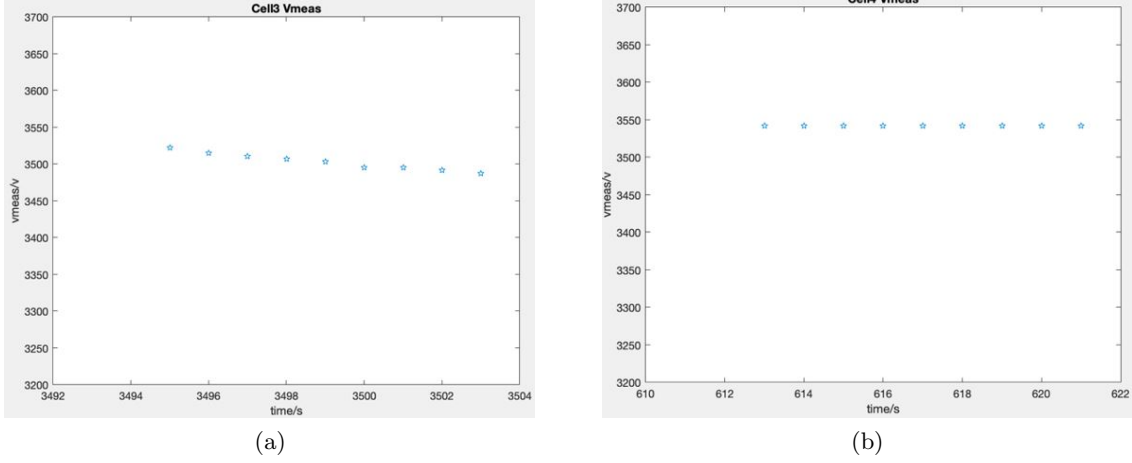


Figure 11: Cell voltage measurement

From Figure 11, 3540 mV was chosen since the average value of different cells in *State 2* was approximately 3540 mV.

| SOC [%] | Open Circuit Voltage (OCV) [mV] |
|---------|---------------------------------|
| 100     | 3540.0                          |
| 90      | 3242.5                          |
| 80      | 3234.4                          |
| 70      | 3216.8                          |
| 60      | 3209.3                          |
| 50      | 3198.2                          |
| 40      | 3186.4                          |
| 30      | 3168.7                          |
| 20      | 3135.4                          |
| 10      | 3088.3                          |
| 0       | 2500.0                          |

Referring to the table, the OCV boundaries are not uniform. In the Energy module implementation, the boundaries between each OCV value was slightly modified to make the range more uniform. The algorithm always checks the value of the SOC before the start of the charging process.

The voltage lookup table was incorporated into *State 0* in order to check the initial SOC value at the start of the charging process. During charging process, the SOC can be calculated by through the Coulomb Counting which measured the current drawn out of a cell and integrated the current over time in order to estimate the SOC:

$$\text{SOC} = \text{SOC} + \frac{\text{Measured current}}{\text{Cell capacity} \times 3600} \times 100\%$$

### 3.5.4 PV MPPT Algorithms

MPPT ensures that the PID controller does not encounter a problem when the PV voltage starts to fall where it will ask for more duty cycle. There would be no increase in current so the PID controller would repeat until the duty is maxed and the current is zero [8].

In order to implement the MPPT, the PV panels would need to be characterised. The form of a PV cell's IV characteristic was determined to be that of a non-ideal current source [9] where the current decreases gradually at first and then rapidly as the voltage across the source rises.

The intended objective of the Energy module was to convert as much sunlight as possible into useable energy, hence the key design problem was where to operate on the IV characteristic that maximised the IV product. By characterising the PV panel, voltage with largest power can be identified. The PV panel was characterised by connecting different values of loads to buck and boost mode and measuring the current and voltage using a multimeter. From Figure 12, it can be seen that the voltage that provided the largest power was 4.7 V.

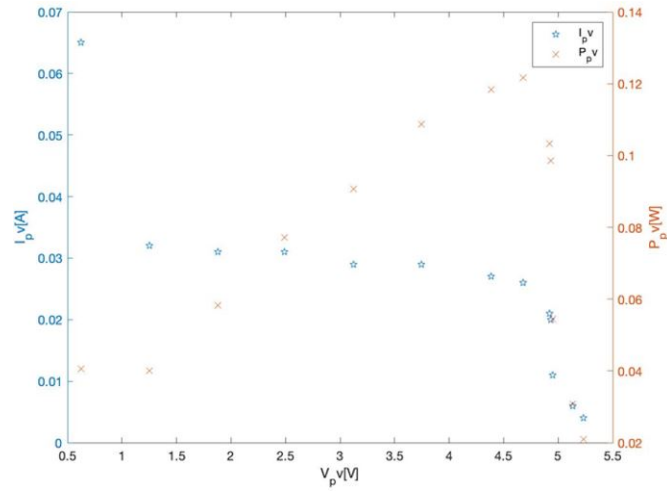


Figure 12: PV IV characteristic

The MPPT was designed and implemented with the Perturb and Observe Method [9]. This was due to the consideration that the intended use of the PV panels would be on the Mars rover and the IV characteristics of PV panels may vary in different environments. Therefore, the Energy module has incorporated a feedback system that maximises the value of the voltage output by using the fluctuating temperature and irradiance to determine the optimal operating point. The MPPT algorithm was implemented within the constant current component. If the measured current was smaller than 200 mA, the algorithm will perform do MPPT. Otherwise, it perform constant current.

By using Perturb and Observe method, the maximum power point was found by comparing the present and previous power value, and varying the PWM accordingly. By varying the PWM, the resistance of the load changes, and the value of current and voltage change as well. By using the buck mode, if the present power was larger than the previous power, the PWM would be decreased by 0.005. If the present power was smaller than the previous power, the PWM would be increased by 0.005. A change of 0.005 was selected because the value was a reasonably large enough range where the settling process of the values could be observed.



### 3.5.5 Circuit Design

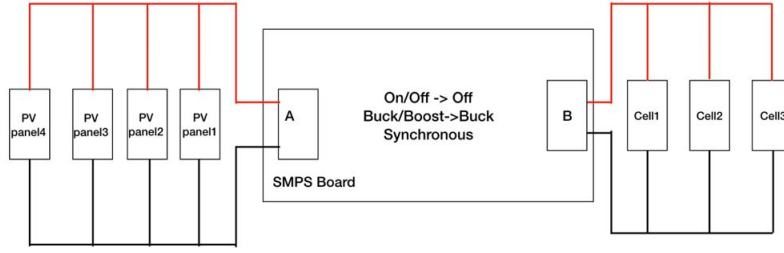


Figure 13: Parallel cell design

The Energy module was design using cells arranged in parallel. This was considered advantageous due to the following:

- The whole energy system still operates even if one cell suffers an unexpected failure. The only effect to the Energy system would be an decrease in total cell capacity.
- Parallel cell arrangements also balance automatically provided that there was no significant difference between the voltage of all the cells before charging begins.
- The larger total current capacity of the system enables the system to function even on a cloudy day where PV panels are less efficient.

### 3.5.6 State of Health

The State of Health (SOH) is an indicator of the current condition of a cell compared to its ideal conditions.

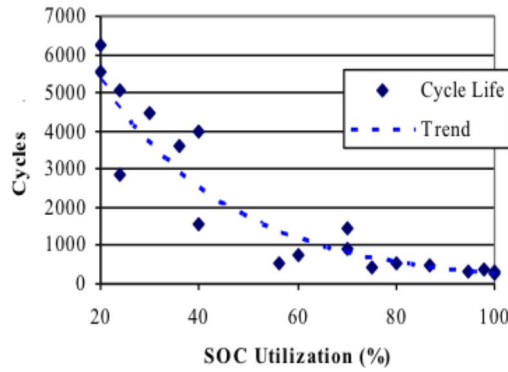


Figure 14: Cycle life vs SOC use [2]

Due to the time constaint of the project, it was not possible to charge and discharge the provided cells at least 400 times in order to plot the relationship between the SOH and the cycles.

The Energy module has implemented several features to ensure the cells are kept as close to its ideal conditions during operation:

- Overvoltage/undervoltage of each cell is consistently monitored by adding an error state for every single cell.
- The battery balancing algorithm implemented in the state machine ensures overcurrent does not occur.

The only concern that could not be mitigated was the battery temperature. A temperature sensor may be added to ensure the cell does not overheated for a long time.

### 3.5.7 Energy to Control interface

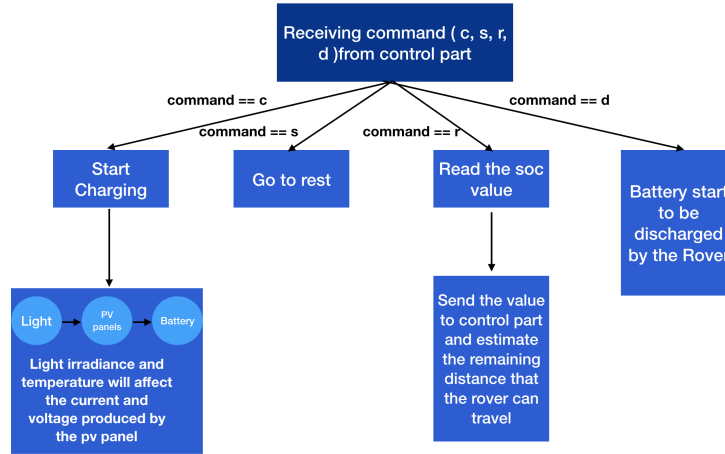


Figure 15: Energy module functional diagram

Energy module communicates to the Control module through the UART port:

---

```

if(Serial.available()>0) {
    command = Serial.read();
    if (command == 'c') { // Read SOC value (state 0) and transition to charging state (state 1)
        state_num = 0;
    } else if(command == 'r') { // Read SOC value passes to the Command module
        Serial.println(soc); // Change to Serial1.print for communication with control sub module
    } else if(command == 's') { // Stop charging, go to rest state
        state_num = 3;
    } else if(command == 'd') { // Start discharge by the drive sub module
        state_num = 15;
    }
}
  
```

---

Because it cannot be tested with Drive module, the discharging process was imitated by a constant current mode with a reference current of 350 mA. 350mA was the value of the current that the Drive module uses while the rover was moving. To make sure all the cells have not been overvoltage/under-voltage, the battery should be balanced while discharging as well.

The Energy module passes the SOC value to the Control module which can be used to estimate the range that rover has left based on the battery remaining by using this equation:

$$\text{Time available} = \frac{\frac{\text{SOC value}}{100} \times \text{Total cell capacity}}{\text{Current drawn out}}$$

$$\text{Range left} = \text{Time available} \times \text{Speed}$$

where "Total cell capacity" is defined as  $565.07 + 543.68 + 554.51 = 1663.26$  mAh

A design problem in the Energy module was the location of the charging system. A static charging station could significantly reduce the weight of the Mars rover which would mean higher efficiency and simpler designs that leads to less possible points of failure. A charging station could include functionalities like additional sensors to monitor the health of the rover and replace failed parts like battery cells.

Placing the PV panels on the rover would mean the rover's range is not constrained compared to if it has return to a charging station. The disadvantage, compared to the static charging station, would be the limited lifecycle of the battery cells and increase complexity of the rover. The Energy module chose to mount the PV panels since quality cell are sufficient and the advantages of not being constrained would be more important than the advantages offered by the static charging station.

## 4 Integration

### 4.1 Testing

### 4.2 Vision

### 4.3 Energy

## 5 References

- [1] *Battery Charging Methods & Terminology*. 2021. DOI: <https://www.heliosps.com/knowledgebase/battery-charging-methods-terminology/>.
- [2] Javier Campillo et al. “Battery Technologies for Transportation Applications”. In: Dec. 2017, pp. 151–206. ISBN: 978-3-319-43649-4. DOI: 10.1007/978-3-319-43651-7\_5.
- [3] *ISRO Technology Transfer Patent*. 2021. DOI: <https://www.isro.gov.in/isro-technology-transfer/patent>.
- [4] David Luecke. *HTTP vs Websockets: A performance comparison*. 2018. DOI: <https://blog.feathersjs.com/http-vs-websockets-a-performance-comparison-da2533f13a77>.
- [5] *NASA Technology Transfer Program - Patent Portfolio*. 2021. DOI: <https://technology.nasa.gov/hot100/>.
- [6] Fahmi Nurfikri. *FastAPI has Ruined Flask Forever for Me*. 2020. DOI: <https://towardsdatascience.com/fastapi-has-ruined-flask-forever-for-me-73916127da>.
- [7] *Overview of Network Security and Single Sign-On*. 2021. DOI: [https://docs.oracle.com/cd/A57673\\_01/DOC/net/doc/NWAN0233/ch1.htm](https://docs.oracle.com/cd/A57673_01/DOC/net/doc/NWAN0233/ch1.htm).
- [8] P. Clemow. *Current through PV panels*. 2021. DOI: <https://piazza.com/class/koio33gz3578w?cid=277>.
- [9] T. Green. *Photovoltaic Energy*. Electronic and Electrical Engineering, Imperial College London. London, United Kingdom, 2021.