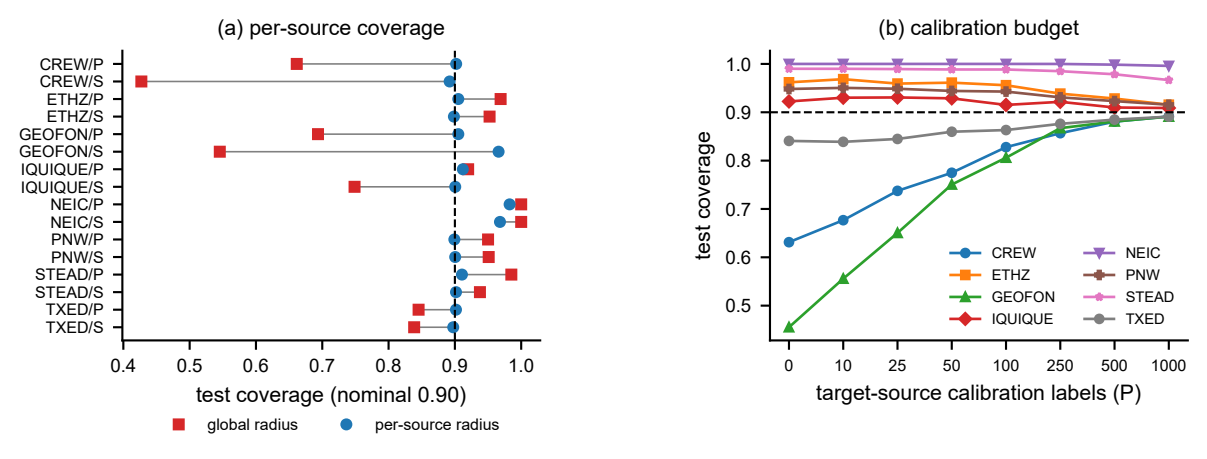
(a) per-source coverage
CREW/P
CREW/S
ETHZ/P
ETHZ/S
GEOFON/P
GEOFON/S
IQUIQUE/P
IQUIQUE/S
NEIC/P
NEIC/S
PNW/P
PNW/S
STEAD/P
STEAD/S
TXED/P
TXED/S
0.4
0.5
0.6
0.7
0.8
0.9
1.0
test coverage (nominal 0.90)
global radius
per-source radius
(b) calibration budget
1.0
0.9
0.8
0.7
0.6
0.5
test coverage
CREW
ETHZ
GEOFON
IQUIQUE
NEIC
PNW
STEAD
TXED
0
10
25
50
100
250
500
1000
target-source calibration labels (P)