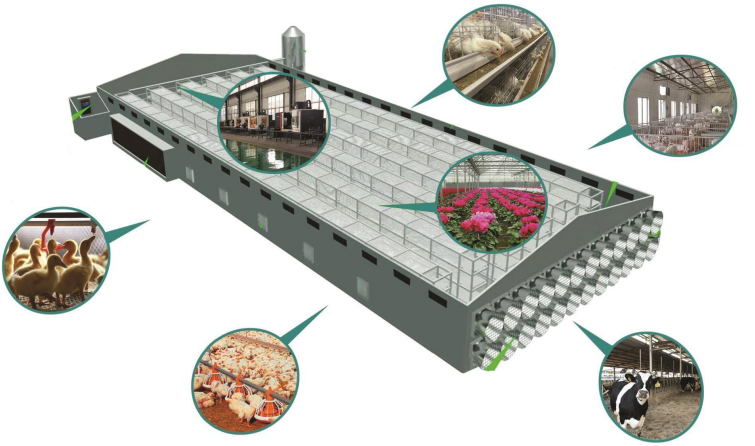


- 通风降温系统
- 加温取暖系统
- 养殖喂料系统
- 养殖清粪系统
- 自动控制系统
- 养殖配套系统
- 温室资材配套系统

:希望我们的产品能对您有所帮助!

]位于青州市经济开发区，多年来一直致力于国家环保节能产品的开发与推广，是专业从事环境控制相关设备生产和技术服务的企业；是集工程设计、制造、按装和服务于一体的高新技术企业；其生产能力及核心技术均居同行业之首。

公司技术力量雄厚与国内多家科研院校有着长期与密切的合作，目前主要产品有：风机、湿帘、冷风机、环流风机、屋顶风机等通风降温、加湿系统；全自动燃煤（油、电、气）热风机等加温系统；料塔、料线等喂料系统；刮板牵引式清粪机、传送带式清粪机等清粪系统；自动控制系统；养殖及温室配套相关设备等。

企业具有自营进出口权，并通过了ISO19001-2015质量管理体系，被评为中国3.15诚信企业，产品通过了欧盟CE认证，畅销全国二十几个省市、自治区并出口到欧洲、北美、东南亚、中东、非洲等几十个国家和地区，与国内多家上市型龙头企业均有着良好与密切的合作，深受广大用户的好评。

公司目标是为客户提供温度、湿度控制的最佳解决方案，为您的温室、畜禽舍、工业厂房等提供高质量的生产生活环境，为您创造最佳效益!

established in 2010, is a professional manufacturer engaged in the research, development, sale and service of all kinds of cooling heating and animal husbandry equipment, such as : negative pressure fan, cooling pad,greenhouse and poultry fan, light traps , manure scraper machine,feed silo, poultry farm equipment and so on.

We are located in Weifang City Shandong Province with convenient transportation access. Dedicated to strict quality control and thoughtful customer service, our experienced staff members are always available to discuss your requirements and ensure full customer satisfaction.

Selling well in all cities and provinces around China, our products are also exported to clients in such countries and regions as Australia, kroea, Japan, Spain, Singapore and Europe and the United States. In addition, we have obtained I S O 9 0 0 1 certificates. We also welcome O E M and O D M orders. Excellent and efficient service to win the majority of customers support and trust.

Whether selecting a current product from our catalog or seeking engineering assistance for your application, you can talk to our customer service center about your sourcing requirements. Any time, we are eager to cooperate with you sincerely, and jointly create a better future，for the development of China's manufacturing industry to provide better service. We believe we will keep growing up and go further with you together.







HY-高档推拉式风机

HY- PUSH-PULL TYPE EXHAUST FAN

高档风机主要由风叶，电机、外框、护网、支撑架、百叶窗等组成，是我公司技术人员依据空气动力学研发而成，有效地减少了风阻系数，优化了设备整体性能，其主要部分均由（国标加厚镀锌层）镀锌板、不锈钢板经电脑数控机床一次性冲压而成；该产品广泛适用于各种类型的畜牧养殖场，花卉温室，工业厂房等场所的通风降温。

HY series High class fan is mainly made up of blade , Centrifugal Opening Device,motor ,outer frame, protecting nets, supporting frames, shutters . It is made based on aerodynamic, effectively reduce the wind resistance. The major parts are made of galvanized steel sheets and Stainless steel sheets. All the products are widely used in various types of buildings as farms ,greenhouses, factory building.

■主要技术参数：Technical parameters

型号规格 Model specifications	风叶直径 Diameter biades (mm)	频率 Frequency (Hz)	电机转速 (转/分) Motor rotational speed rpm	风量 Air flow (m^3/h)	输入功率 (W) Import power	噪音 (分贝) Noise decibels	全压 (Pa) Total pressure	额定电压 (V) Rated voltage	高 (mm) Height	宽 (mm) Width	厚 (mm) Thickness
HYFB-800	710(29in)	50	≥1400	26000	370	≤64	60	380	800	800	450
HYFB-1000	900(36in)	50	≥1400	32000	750	≤64	70	380	1000	1000	450
HYFB-1100	1000(44in)	50	≥1400	40000	750	≤64	70	380	1100	1100	450
HYFB-1380	1270(50in)	50	≥1400	44800	1100	≤64	56	380	1380	1380	450
HYFB-1530	1400(56in)	50	≥1400	58000	1500	≤64	60	380	1530	1530	450

由于产品不断更换新，技术参数如有改动恕不另行通知。

HY-高档推拉式风机HY- PUSH-PULL TYPE EXHAUST FAN



风机扇叶均经过先进的电脑动平衡测试仪校正，动平衡量控制在1g之内，使风机运行平稳、振动小、噪音小、增强了整机稳定性。扇叶材质有不锈钢、镀锌板、铝合金三种材质可选。

Fan blade are advanced through the computer dynamic balance measuring instrument calibration,Dynamic balance control in 1g,The fan running smoothly,The blower to smooth running, small vibration, low noise, enhances the stability of the whole machine.Fan blade materials are stainless steel, galvanized plate, aluminum alloy three kinds of optional material.




扇叶由自洁不锈钢材料经模具冲压成型制成，无灰尘，美观耐用。特殊的叶片形状设计保证风量大，不变形，不断裂；不锈钢厚度1.2mm,表面光洁度等级：BA级别。

Fan blade is made of Krupp stainless steel by punch forming, no dust, attractive and durable. Special blades shape design ensure large air volume, no deformation, no broken, keep air volume same all the way. Thickness 1.2mm, surface finish BA grade.



电机有国产名牌电机与西门子电机可选用。电机的电压和频率可定制。国产名牌电机加入缺相保护装置，当电源缺相时，进行断电控制；电机防护等级IP 55，绝缘等级：F级。

Motor have domestic brand motor and Siemens motor can be chosen. Motor voltage and frequency can be customized. Domestic brand motor joining open phase protection device，When the lack of power, can carry out their own power to control; Motor protection grade IP 55, insulation class: F.



离心打开机构可保证百叶窗完全打开或关闭，使百叶窗开启时减小阻力，加大风流量；关闭时严密，能有效阻挡室外的风、光线和灰尘进入鸡舍；首家采用优质尼龙PA66制成，确保了打开机构的使用寿命；打开机构部件连接均采用铜铆钉链接，耐磨、不生锈，灵活性好，降低了摩擦系数；导向杆采用304不锈钢，外加特殊材料，保证了强度、不生锈，大大提高了使用寿命。

Centrifugal type open mechanism can guarantee that the shutters completely open and close, Make the shutters opened to reduce resistance, increase the air flow;Closed tight, can effectively prevent the outdoor wind, light and dust from entering the house; The first use of high-quality nylon PA66 material, to ensure the servile life of the open mechanism; Centrifugal type open parts are connected , use copper rivets link, wear resistance, no rust, good flexibility, reduces friction coefficient;Guide rod made of 304 stainless steel, plus special material, ensure the intensity, not rusty, greatly improving the service life.



采用进口皮带，确保使用寿命，免维护；改型为B型皮带，使皮带使用寿命在A型的基础上增加了3倍。

Using imported belt，to ensure that the service life，free Maintenance；The service life of the belt in a type A on the basis of an increase of 3 times.



为了方便搬运，风机机身两侧设计了凹进式塑料提手，不但方便搬运，大大提高了运输效率，而且设计合理，外形美观大方，不伤手、不易损坏。

In order to facilitate handling, fan on both sides of the fuselage design of the recessed plastic handle, convenient transportation, improve transport efficiency, and reasonable design, beautiful appearance, not to hurt the hand, not easy to damage.

HY-蝴蝶门式拢风筒（喇叭口）风机 HY-BUTTERFLY CONE FAN





■性能特点：

◆采用先进前置双门打开机构，风阻小、密闭好、效率高；

◆拢风筒采用插结式连接机构，避免了繁琐的螺栓螺母紧固，减少工人劳动强度，提高风机美观度；

◆铝镁合金材质的皮带自动涨紧装置，不变形、使用寿命长，并采用皮带内侧涨紧有效避免皮带反向扭曲，大大延长皮带使用寿命；

◆风机双门关闭时加有橡胶密封装置，当多台风机根据环境情况不同时启动时，有效避免室外空气从其他停止风机进入，大大提高风机工作效率，确保空气由湿帘或通风窗进入(与同尺寸风机相比，提高效率15—20%)；

◆电机安装合理，有效保护电机的同时，不但避免电机对扇叶的风阻，而且电机底板的连接使风机外框更加牢固。

◆Reasonable cone designing with big air volume ,low noise；

◆Imported bearing,high strength ,low noise and long service life；

◆Shutter are made of high strength hot-galvanized steel sheet,anti-tioxidant, light weight and no distortions；

◆High strength dabber aluminium-magnesium alloy wheel.hight strength and long service life；

◆Mirror designed and injection moulding Stainless steel balde,with big air volume,never distor-tion and broken ；

◆High efficient and energy-saving motor with ccc certificate ,protection class:IP55,insulation- class:F grade..

■安装实例：








■主要技术参数：Technical parameters

型号规格 Model specifications	风叶直径 Diameter blade (mm)	风叶转速 Blade rotational speed rpm (r/min)	电机转速 Motor rotational speed rpm (r/min)	风量 Air flow (m^3/h)	全压 Total pressure (Pa)	噪音 Noise decibels (分贝)	输入功率 Input power (W)	额定电压 Rated voltage (V)	高 High (mm)	宽 Width (mm)	厚 Thickness (mm)
HY-1000	910	600	1400	22000	70	≤70	550	380	1000	1000	1180
HY-1380	1270	439	1400	42500	80	≤70	1100	380	1380	1380	1300







HY-高档重锤式风机

HY- HEAVY HAMMER TYPE EXHAUST FAN

风机主要由风叶、电机、外框、护网、支撑架、百叶窗等部件组成，电机驱动风叶产生气流，活动百叶窗型式可按用户需要配备，开机后百叶窗可自动开启，停机时百叶窗自动闭合，以防室外灰尘、异物等进入，亦可避免雨雪及倒风的影响。

Fans mainly consists of blade, motor, frame, protect net, bracing cage, shutters. The motor drives blade to cause air flow and louver window can open and close automatically to keep the dust from entering.

■主要技术参数：Technical parameters

型号规格 Model specifications	风叶直径 Diameter biades (mm)	风叶转速（转/分） Biades rotational speed rpm	电机转速（转/分） Motor rotational speed rpm	风 量 Air flow (m^3/h)	全 压 (Pa) Total pressure	噪音（分贝） Noise decibels	输入功率 (W) Import power	额定电压 (V) Rated voltage	高 (mm) Height	宽 (mm) Width	厚 (mm) Thickness
HYA480(18 ")	410	1400	1400	3600	50	≤60	180	380	480	480	320
HYA-620(24 ")	500	680	1400	6500	60	≤60	370	380	620	620	400
HYA-800(29 ")	710	660	1400	22000	60	≤60	370	380	800	800	400
HYA-900(30 ")	750	630	1400	28000	65	≤65	550	380	900	900	400
HYA-1000(36 ")	900	610	1400	30000	70	≤70	550	380	1000	1000	400
HYA-1100(40 ")	1000	600	1400	32500	70	≤70	750	380	1100	1100	400
HYA-1220(44 ")	1100	460	1400	38000	73	≤70	1100	380	1220	1200	400
HYA-1380(50 ")	1250	439	1400	44000	56	≤70	1100	380	1380	1380	400
HYA-1530(56 ")	1400	325	1400	55800	60	≤70	1500	380	1530	1530	400

HY-玻璃钢风机 HY-FRP cone fan





性能特点：Performance characteristics

此款玻璃钢风机适用于有腐蚀性气体的养殖场及其他工矿厂房等需要降温的场所
玻璃纤维外壳极其坚固且抗腐蚀、不变形、不掉色
喇叭形排风口高度耐冲击，提高性能10%
PG材料纤维增强复合材料，是玻璃纤维与尼龙在高压下注塑形成，其特点
为强度高，韧性强，重量轻； 此款PG扇叶采用螺旋桨流线型设计，
风量大；维护成本低 高质量进口轴承，确保扇叶平稳高效运转
可润滑汽车型皮带涨紧器 优质高效电机

This FRP fan is suitable for places where the temperature needs to be cooled, such as breeding farms with corrosive gases and other industrial and mining plants.
The fiberglass shell is extremely strong and resistant to corrosion, deformation, and discoloration
The horn-shaped exhaust vent is highly impact resistant and improves performance by 10%
PG material fiber reinforced composite material is formed by injection molding of glass fiber and nylon under high pressure.
Characteristics:
In order to have high strength, strong toughness and light weight; this PG blade adopts the streamlined design of the propeller, large air volume; low maintenance cost
High-quality imported bearings to ensure smooth and efficient operation of fan blades
High quality and high efficiency motor

■主要技术参数：Technical parameters

规格型号 Model	风机尺寸 Model	扇叶直径 Propeller Dia.（MM）	扇叶 (Blade)	扇叶转速 Rated Speed (R/min)	风量 Air Capacity $M^3/h/(CFM)$ @0"SP	额定功率 Rated Power Kw	电压参数 Voltage Frequency/Phase	驱动方式 Drive Mode	风机尺寸 Complete Size LXHXW(mm)	风机尺寸 Complete Size LXHXW(mm)
HYB-1630	55 寸	1397	3 片尼龙扇叶	710	57000	1.5	380V/220V	直驱 Direct	1630*1630*1480	1540*1540
HYB-1530	51 寸	1290	3 片尼龙扇叶	710	48000	1.1	380V/220V	直驱 Direct	1530*1530*1220	1460*1460
HYB-1460	50 寸	1250	3 片尼龙扇叶	710	44000	1.1	380V/220V	直驱 Direct	1460*1460*1220	1400*1400
HYB-1170	36 寸	915	3 片尼龙扇叶	910	26000	0.75	380V/220V	直驱 Direct	1170*1170*1200	1080*1080
HYB-810	24 寸	610	6 片尼龙扇叶	910	12000	0.37	380V/220V	直驱 Direct	810*810*1000	740*740
HYB-660	18 寸	460	8 片尼龙扇叶	1400	7400	0.37	380V/220V	直驱 Direct	660*660*780	580*580

由于产品不断改进，各技术参数如有变动，恕不另行通知



HY–玻璃钢风机
HY–FRP cone fan

◆ 合理的喇叭口设计，噪音低、风量大、抽风力强、运转费用低；
◆ 进口轴承，强度高、噪音小、持久耐用；
◆ 采用空气顺流原理合成式PVC百叶窗或铝板百叶窗，抗氧化、重量轻、不变形、开启灵活、防空气倒流；
◆ 高强度多加强筋铝镁合金皮带轮，重量轻、强度高、韧性好；
◆ 6片塑钢扇叶，不变形，不断裂，美观耐用

◆ Reasonable cone designing with big air volume ,low noise;
◆ Imported bearing,high –strength ,low noise and long service life;
◆ Shutter are made of high strength fiber glass sheet,antioxidant, light weight and no distortions;
◆ High strength dabber aluminium-magnesium alloy wheel.hight strength and long service life;
◆ Mirror designed and injection moulding Stainless steel balde,with big air volume,never distortion and broken 。

■主要技术参数：Technical parameters

规格型号 Model	扇叶叶直径 Propeller Dia. Mm/(Inch)	扇叶数量	扇叶材质 Propeller Material	额定转速 Rated Speed (R/min)	风量 Air Capacity M^3/h	额定功率 Rated Power Kw	噪音 Noise Db	电压参数 Voltage Frequency/Phase	尺寸 Complete Size LXHXW(mm)	带喇叭口尺寸 Size With Cone LXHXW(mm)
HYBF–1460	1240/(50”)	6	玻璃钢 fiberglass	520	36000	1.1	60–70	380V/220V 50HZ/60HZ 3/1	1460*1460*590	1460*1460*1270
HYBF–1260	1080/(42”)			520	32000	0.75	60–70		1260*1260*560	1260*1260*1200
HYBF–1060	890/(36”)			520	19000	0.55	60–70		1060*1060*560	1060*1060*1160
HYBF–850	640/(24”)			700	9500	0.37	60–70		850*850*450	850*850*950
HYBF–660	480/(18”)			950	6500	0.37	60–70		660*660*450	660*660*780
HYBF–560	380/(15”)			950	5500	0.25	60–70		560*560*450	

HY-牛舍悬挂式风机 HY cow house hanging exhaust fan











性能特点：Performance characteristics

风扇叶片是由克虏伯不锈钢冲压成型，无灰尘，美观耐用。特殊的叶片形状设计保证风量大，不变形，不断裂，使空气体积相同的所有方式。

Fan blade is made of Krupp stainless steel by punch forming, no dust, attractive and durable. Special blades shape design ensure large air volume, no deformation, no broken, keep air volume same all the way.

中国著名的电机与西门子电机可用。电机的电压和频率可定制。中国著名的汽车用特殊设计的风扇，第一个提出在缺相保护装置，关闭电源，当电力短缺，可自行断电。电机防护等级IP 55，绝缘等级F。

Both Chinese famous motor and Siemens motor are available. Motor voltage and frequency could be customized.Chinese famous motor, special design for fan, the first one put forward the phase lack protection device which could power off when shortage of electricity. Motor protection grade IP55, insulation Class：Grade F


风扇皮带轮是由高强度铝镁合金的压铸，降低重量，叶轮叶片完整，高耐蚀性。加强筋带轮设计。消除内部应力，提高自身的刚度和稳定性，不会破碎。

Fan belt pulley is made of high strength aluminum–magnesium alloy by die–casting which reduces the weight of blade impeller complete, high corrosion resistance. Special reinforced ribs pulley design. Blast–sanding treatment for attractive appearance, eliminate internal stress to improve its own rigidity and stability, never broken.

■主要技术参数：Technical parameters

型号规格 Model specifications	风叶直径 Diameter biades (mm)	风叶转速 (转/分) Biades rotational speed rpm	电机转速 (转/分) Motor rotational speed rpm	风 量 Air flow (m^3/h)	全 压 (Pa) Total pressure	噪音 (分贝) Noise decibels	输入功率 (W) Import power	额定电压 (V) Rated voltage	高 (mm) Height	宽 (mm) Width	厚 (mm) Thickness
HYNF-800(29 ")	710	660	1400	22000	60	≤60	370	380	800	800	420
HYNF-900(30 ")	750	630	1400	28000	65	≤65	550	380	900	900	420
HYNF-1000(36 ")	900	610	1400	30000	70	≤70	750	380	1000	1000	420
HYNF-1100(40 ")	1000	600	1400	32500	70	≤70	750	380	1100	1100	420
HYNF-1220(44 ")	1100	460	1400	38000	73	≤70	1100	380	1220	1200	420
HYNF-1380(50 ")	1250	439	1400	44000	56	≤75	1100	380	1380	1380	420
HYNF-1530(56 ")	1400	325	1400	55800	60	≤70	1500	380	1530	1530	420

由于产品不断改进，各种参数如有变动，恕不另行通知。

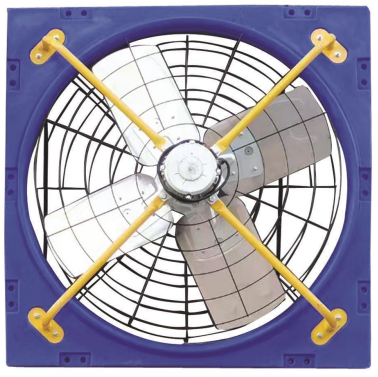









HY-牛舍悬挂式风机
HY cow house hanging exhaust fan

◆叶片采用专用镜面不锈钢冲压成型制成，风量大、不变形、不断裂、不挂灰、美观耐用；
◆Fan blade is made of mirror stainless steel by punch forming .large air volume,no deformation,no dust,attractive and durable.
◆风机导流罩采用高锌层镀锌板一次性冲压而成，保证使用过程中不生锈；采用外翻沿倒流设计，提高通风量，减少风机震动和噪音，增加风机稳定性。
◆Fan galvanized round frame with zinc-coated of 280g/sqm,increase zinccoated layer,to ensure never rust.Flanging edge backflow design increase ventilation,reduce vibration and noise,improve fan's stability.
◆电机采用铝镁合金外壳，散热性好，效率高，电机尺寸小，重量轻，电流低、力矩大；
◆Motors with aluminum-magnesium alloy housing,good heat emission,high efficiency,reasonable dimension,light weight,low current,big torque.
◆扇叶均经过先进的电脑动平衡测试仪校正，使风机运行平稳、降低噪音、增强稳定性、延长使用寿命。
◆Fan blades are adjusted by intelligent dynamic-balance tester,ensure the fan smooth running,lower vibration,less noise,increase stability and service life.



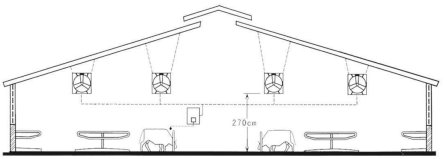

型号规格 Model specifications	风叶直径 Diameter blades (mm)	风叶/片 Wind leaf /piece	额定电压 Rated voltage (V)	级数 Pole	风叶转速 Motor rotational speed r/min	输入功率 Input power (W)	风量 Air flow (m^3/h)	噪音 Noise (db)	高 Height (mm)	宽 Width (mm)	厚 Thickness (mm)
HYN-1140	1000	4	380	8	720	400	25600	65	1140	1140	300
HYN-1240	1100	4	380	8	680	450	35000	65	1240	1240	300
HYN-1380	1200	5	380	10	560	550	39000	65	1380	1380	300

HY-导流板

■主要性能特点

◆导风板的作用是调节水帘冷风的大小及风向，避免冷风直接吹畜禽，以免对畜禽形成刺激。

1、本产品适用于规模化养殖场，作为畜禽舍内的通风设备。


2、可安装在畜禽舍侧墙预留窗口内；

3、封闭严密，结构合理，开启方便；


4、可根据用户不同的尺寸、风力要求定制生产不同规格的导流板。



HY-电动百叶窗

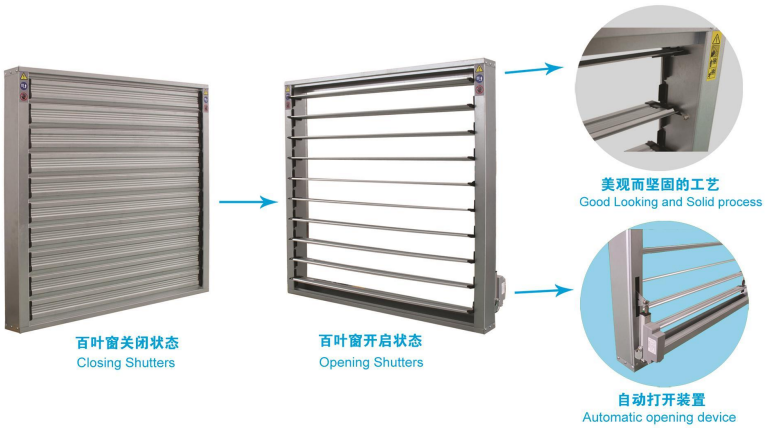

HY-屋顶无动力通风器 HY- Roof Ventilation Fan

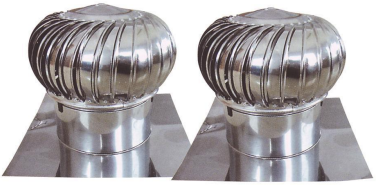



性能特点：Performance characteristics

◆绿色环保，无需任何能源，一次安装终生受益。
◆灵敏度高，只要微风或室内外有温差即可驱动涡轮叶片转动。
◆运转平稳，安静、改善室内环境。
◆采用整组高级轴承，无需润滑，坚固耐用，故障率极低。
◆耐腐蚀、耐酸碱，使用寿命长。

◆ Natural wind drives, operating in 24 hours of whole day .
◆ High sensitivity , slight wind or the range of temperature can drive the turbine blade to turn around .
◆ Rotary stablely, quietly to improve the inner environment of room .
◆Using complete senior axis bearing , no lubrication , solid , low fault rate .
◆ Corrosion resistance , acid and alkali proof , long service life .



HY-环流风机
HY air circulation fan



HY-屋顶有动力通风器
HY- Roof Ventilation Fan

◆电机(Power)：0.25KW
◆排气量(Gas displacement)：3500-4000m³
◆直径(Diameter)：600mm
◆高度(Height)：450mm
◆安装直径(Install diameter)：530mm


◆ 电机采用性能卓越的"海尔"三防专用电机
◆ 国际先进的节能技术及热自动保护系统
◆ 经过"海尔"实验室360小时破坏性试验
◆ 轻型铝板冲压扇叶，大角度、风量大、低噪音
◆ 外壳采用先进的整体集流器设计
◆ 外壳有不锈钢、钢板喷塑型可选
◆ 配备方便美观的扣式挂件
◆ 使用寿命长达10年以上

型号	风量（m^3/h）	功率（w）	电压（v）	全压（Pa）	频率（Hz）	有效距离（m）	规格（mm）
HY-400	3200	120	220/380	60	50	12-16	460X460X310
HY-500	5400	180	220/380	60	50	18-22	560X560X310
HY-600	6500	370	220/380	60	50	24-28	660x660x310

HY–侧风窗 HY– Air inlet



外形尺寸：Overall dimensions
1. 600*320*160mm
2. 645*310*150mm
3. 690*310*240mm
安装尺寸：Installation dimensions
1. 550*260mm
2. 600*250mm
3. 650*250mm





性能特点：

- 采用优质工程塑料注塑加工制成，密度大更加牢固；
- 原材料中加有抗紫外线的原料，抗老化性能强、使用寿命更长久；密封严密、开启灵活、进风口加有防鸟网；
- 双排不锈钢弹簧确保侧风窗密封良好

Performance characteristics

- Made of excellent quality engineering plastic by injection molding, higher density and more firmly.
- With UV resistant additive, air inlet has stronger anti-aging ability, longer service life, better sealing, flexible opening, with anti-bird nets.
- Double springs ensure excellent sealing.






尺寸可定做 Dimensions can be customized

HY–吸顶侧风窗 HY– Roof Air inlet







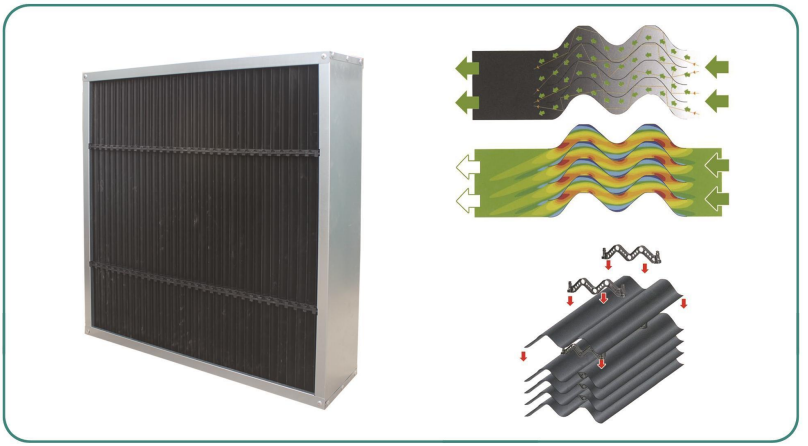


HY–鸡舍遮光罩
HY–Poultry light filter

◆由注塑成型、无眩光PVC材料精制而成。持久耐日晒、耐化学药品、耐高压清洁；
◆设计合理，可组装不同大小尺寸、方便安装、高效减少光亮；
◆外框材质有不锈钢外框、镀锌板外框；




Performance characteristics

1.Non–glare PVC materials, by extrusion molding finished, anti–ageing, chemical resistant, high pressure washable.
2.Reasonable design, different dimension available, easy assembly.
3.Frame options for customer:stainless steel sheet or galvanized sheet



Type	Size(mm)	Weight(kg)
50"DM–LT	1400x1400x250	59
36"DM–LT	1150x1150x250	27
Air–Inlet on side wall	630x250x250	11

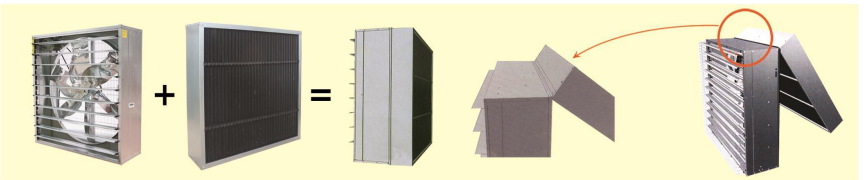

HY-高强度湿帘 HY-Cooling pad

■有铝合金外框、镀锌板外框、不锈钢外框、塑钢外框可选



铝合金外框



镀锌板外框





塑钢外框内循环湿帘

■规格参数：Technical parameter

	7090 型	7060 型	5090 型
H(mm)	1500.1800.2000	1500.1800.2000	根据客户要求定做
W(mm)	900.600.300	900.600.300	根据客户要求定做
T (mm)	100.150.200	100.150.200	根据客户要求定做
h(mm)	7	7	5
a	45	45	45
b	45	15	45


H:湿帘高度　W:湿帘宽度　h:湿帘波纹高度　T:湿帘厚度　a:波纹角度　b:波纹角度







纵向水帘降温系统

■湿帘安装示意图：

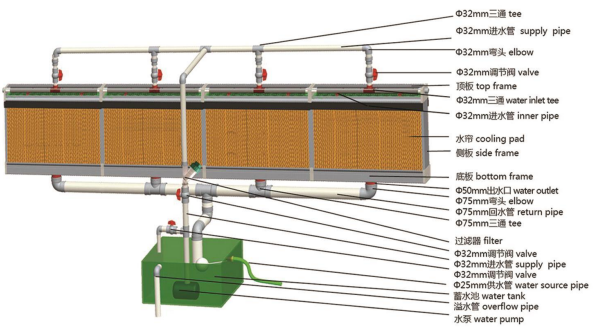




负压抽风机




横向水帘降温系统

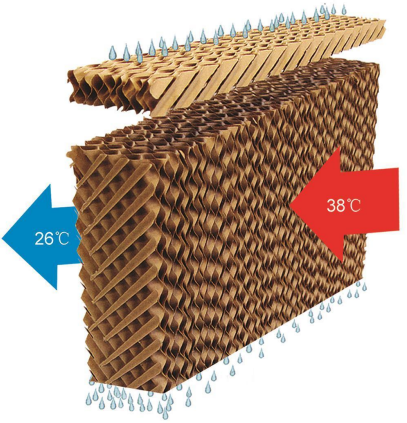



湿帘专用过滤器 Filter

■干湿球温度差：



HY-高强度湿帘

HY-Cooling pad

◆蒸发效率高、吸水性强
◆潮湿状态下低压损，从而降低运营成本
◆无水遗留　　◆低分解率，自清洁
◆结构稳定，自支撑
◆使用寿命长，运行成本低
◆安装便捷、快速
◆环保、无污染
◆多种外表颜色，棕色，绿色，棕绿交错色，单面黑色，单面绿色，单面黄色。

◆Warrant time:5years/10years
◆Corrugated paper has high intensity structure, corrosion resistant, long service life.
◆Fine percolating and absorbing water to ensure water drip wet the wall.
◆Specific stereoscopic structure. It can provide the largest evaporation surface area for heating exchanging between water and air.
◆Outer frame can be alternative of aluminum alloy and galvanized board.
◆A variety of external colors, brown, green, brown-green interlaced color, one-sided black, one-sided green, one-sided yellow.

■湿帘生产线 COOLING PAD PRODUCTION LINE






HY–冷风机 HY–Air cooler









■主要技术参数：Technical parameters

型号	功率 kw	电压 v	风量 m^3/h	适用面积 m^2	外形尺寸 mm
HY–1.1	1.1	380/220	18000	100–150	1100x1100x980
HY–1.5	1.5	380/220	20000	100–150	1100x1100x980
HY–2.2	2.2	380	25000	200–350	1140x1140x1150
HY–3.0	3.0	380	30000	200–350	1280x1280x1200
HY–4.0	4.0	380	40000	200–350	1400x1400x1400

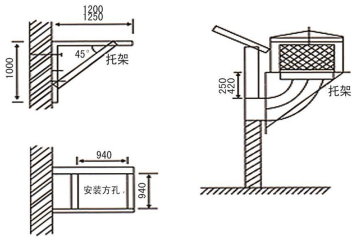

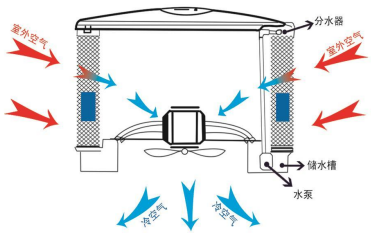

广泛适用于：纺织、服装、注塑、铸造、玩具、印刷、电子、洗衣房、锅炉房等有高温的工业厂房；商场、超市、候车室、酒店、餐厅、医院学校等公共场所；温室、畜牧、花卉等农业场所。

1.Textile, printing and dyeing , plastics , steel , machinery, ceramics, chemical industry, metallurgy, glass, metal, leather and other industrial plants workshop;
2.Planting,electronics,footwear,printing and dyeing, clothing, printing, packaging, flld processing industry sites;
3. Hospitals hotels, stadiums, exhibition halls, schools, waiting rooms, supermarket , laundry room:
4.Kitchen markets,large–scale entertainment center, underground parking,stations and other public places
5.Greenhouse,flowers,poultry,livestock and other kinds of farms.



HY-垂直循环风机

HY-Vertical circulating fan

HY-500，可为温室提供良好的纵向通风

在现代化的温室中，通风发挥着至关重要的作用。空气再流通可使温室中的热流平均分布，有利于各个位置的农作物同步生长。随着现代化温室能源技术的提高和集约化栽培的推广，对农作物湿度制的必要性越来越明显。GZAF-500以简单高效的方式绑住农作物种植者降低湿度对农作物的不良影响。纵向和横向气流可为农作物生长提供适宜的气候环境。

HY-500					
电压	VOLTAGE	220 V/50 Hz	380V/50 Hz	220 V/60 Hz	110V/120V/60 Hz
输入功率	INPUT POWER	210 W	210 W	300W	300W
电流	ELECTRICITY	1.0 A	0.6A	1.3A	2.3 A
转速	RPM	950 RPM	950 RPM	1140 RPM	1140 RPM
风量	VOLUME	5000 m^3/H	5000 m^3/H	5800 m^3/H	5800 m^3/H
噪声(7米)	NOISE(7m)	50dB	50dB	50dB	50dB
重量	WEIGHT	10.5KG	10.5KG	10.5KG	10.5KG
尺寸	VOLUME(mm)	680x680x380	680x680x380	680x680x380	680x680x380

HY-内循环湿帘（深水槽）





PVC深水槽的优点：The advantages of the PVC deep sink:


◆避免循环水的污染
◆方便清理维护
◆省掉单独的循环水池
◆能够迅速产生水分子，提高降温效率。
◆avoid the pollution of circulating water
◆Convenient cleaning and maintenance
◆save a separate circulating pool
◆we can rapidly generate water molecules and improve the cooling efficiency.







PVC深水槽的应用实例：Application example of PVC deep sink:



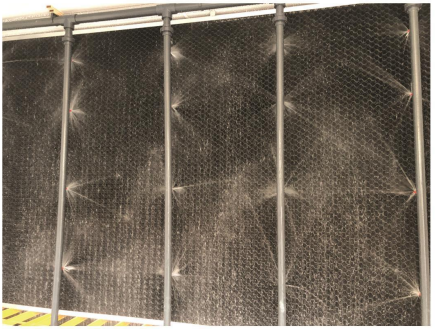



聚丙烯海绵网

HY-塑料湿帘除臭系统

HY-Plastic Cooling pad


◆我们制造的产品是专为畜牧养殖业提供的空气净化装置，还原牧场 周边纯净清洁的空气环境，让周边环境免于污染气体困扰。


◆采用生物净化方式或化学净化方式

◆可提供标准的模块化设备或建筑集成系统模式，也可为用户量身定 制非标模式。

◆模块化设备可根据用户实际通风流量选择，我们通常提供50000m³和75000m³两种规格，每个模块都是一个可独立运行的系统：也可以多个模块组合共用一个基础溶液池和控制系统。

◆集成式系统在设计阶段和房舍建筑同时设计，与建筑物有机结合，采用可调节的预制模块，以实现所需的容量，现场安装，造价经济。





氨气去除率>70%-95%

臭气去除率>40%-75%

粉尘去除率>45%-80%










HY-水暖风暖一体式热风机 HY-Water and wind coal burning heating machine







循环水泵
Circulating pump



水暖散热器

性能特点:Performance characteristics

该炉主要应用于畜禽养殖、蔬菜种植、花卉温室、工业厂房等供暖场所，配合自动调温装置实现了同时利用热风和水暖迅速提高室内温度，在温度到达要求时迅速停机，利用炉内余温保持热水温度，达到了保温时间长、节省燃煤的目的，安装使用简单，管理方便，省工省力，能源利用充分，较传统加温方法节能30%以上，热效率95%以上。

This heating machine is widely used in poultry farms, vegetable greenhouse, flower greenhouse industrial factories and other places. It can improve the indoor temperature by using hot air and hot water. It will stop when reaches to the required temperature, keeping temperature by the remaining temperature in the heating machine. By this, it can keep the long heating preservation and save coal consumption.

Easy to install and maintain,save time and labor cost, save 30% more energy compare with the tradditional heating methods and improve 95% more heat ing efficiency.

■主要技术参数：Technical parameters

型号 model	单位 unit	HY-10	HY-20	HY-30	HY-40
额定发热量 Rated heat capacity	Kcal/h	100000	200000	300000	400000
热风出口温度 Hot air outlet tem	℃	60-120	60-120	60-120	60-120
热水出口温度 Hot water outlet tem	℃	50-80	50-80	50-80	50-80
功率 Power	KW	3.67	3.91	5.3	5.3
电压 Voltage	V	380/220	380/220	380/220	380/220
外形尺寸 Dimension	mm	1500*1100*1600	1800*1200*1600	1900*1300*1700	2000*1400*1800
重量 Weight	kg	1300	1800	2100	2400





喷雾加湿自控箱
Spray humidification control box



智能自动控温箱
Automatic temperature-control box



HY-风暖型高效燃煤热风机

HY series coal-burning heater

性能特点:

◆供暖面积；300—1800平方米
◆燃烧室加高设计，具有超长的使用寿命
◆全不锈钢除尘器，除尘方便，效率更高
◆保温隔热五回程设计，将热损耗降至最低
◆热效率高达90%
◆独有的壁厚20mm耐高温铸钢管，保证燃烧十年不变形
◆所有指标均达到国家Ⅰ类地区环保指标

Features:

- Heating area:300-1800 square meters
- Effects of combustion chamber heughtening design,with long service life
- Stainless steel dust precipitator dust,simple,high effciency
- Design of insulation three return ,the heat loss is reduced to the minimum
- the high thermal effciency of 90%
- The unique 20mm wall thicknessof heat resistant cast steel pipe,ensure the combustion ten years without deformation
- All the indicators have reached the national classIregion environmental sandards

型号 Thchnical model	额定发热量 Heat output (kcal/h)	热风温度 Hot air temperature (℃)	额定热风量 Heating walume (m^3/h)	燃煤量 Consume of fuel (kg/h)	功率 Power (kw)	外形尺寸 Outer Size (mm)	重量 Weight (kg)	有效供热面积 Heating area (m^2)
HYMR-5	50000	80-150	9500	5-10	1.87	1250*800*1850	750	300
HYMR-10	100000	80-150	18700	10-20	3.55	2030*950*2040	1150	600
HYMR-20	200000	80-150	37400	30-40	5.15	2450*1250*2280	1700	1200
HYMR-30	300000	80-150	39400	40-50	6.75	2720*1250*2600	2400	1800
HYMR-40	400000	80-150	42500	50-60	9.1	2920*1300*2600	2600	2400

HY-高效燃油热风机 HY series Light oil Burning Heater



大风筒 大热量
轻松供暖



目前市场上对供热能源的选择非常多，方式分为燃煤，燃气，电采暖，燃油采暖。在各种采暖方式中，空气采暖是较为舒适的，而燃油热风机作为工业新兴的一种空气采暖方式被广为接受。

燃油暖风机是一种以柴油或煤油作燃料产生热风，用于供暖加温的新型产品，该产品具有轻便、灵活、体积小、重量轻、热风功率强大、操作简便、分离烟器、断油检知，安全可靠、用电少、耗油省等特点。本机有多种安全装置：感振自动停止装置、火焰监控装置、过载保护装置、过热保护装置、停电安全装置适用于畜牧养殖、温室大棚、工厂车间等所有需要加温供暖的场所。

技术参数

型号	功率	电压	风量 m^3/h	燃料消耗 L/h	油箱容积 L	使用空间 m^2	产品尺寸 mm	包装尺寸 mm	净重 khs	毛重 kgs
HYRY-30	30KW	220V 50Hz	720	1.5–2.4	38	240	920x456 x630	930x450 x500	21.5	23.5
HYRY-50	50KW	220V 50Hz	1100	2.0–4.0	56	400	1050x490 x615	1080x5000 x580	27.4	33
HYRY-70	70KW	220V 50Hz	1300	2.5–5.4	68	450	1170x570 x705	1215x580 x705	40.8	45.8
HYRY-100	100KW	220V 50Hz	1500	4.0–8.0	69	600	1195x570 x690	1251x581 x706	45.8	53







电暖风机 Electric heater

HY-电暖风机
Electric heater


- ●自动控制：只需设定要求的温度，即可全自动控制电热风机的工作与停止，实现无人值守工作。
- ●多档火力：根据加热强度与电力状况，从一档至多档自由选择加热速度与梯度。
- ●延时保护：多档不同的延时启动保护，防止瞬时启动电流过大对电网的冲击；风机延时停止保护，余热全部利用，并保护加热主体。
- ●陶瓷加热，耐用节能：适应复杂环境状况，如畜禽舍和温棚等氨气浓度高，湿度大的环境。特制灭光加热管，更可省电30%。
- ●静音风机：采用超静音外转子风机，风力强劲，噪音小，符合家用标准。
- ●使用便捷，加温迅速：只用电。可使用单相电，也可使用三相电；通电10分钟，就能达到最大热力。

型号	功率 KW	电压 V	供暖面积 m^2	外形尺寸 mm
HYD-5	0.09	380/220	50-80	450x580x710
HYD-10	0.12	380/220	100-130	500x650x780
HYD-15	0.37	380/220	130-180	580x680x840
HYD-20	0.37	380/220	180-230	580x680x840
HYD-30	0.55	380/220	230-350	680x770x1020
HYD-40	1.5	380/220	350-450	680x710x1180
HYD-50	1.5	380/220	450-500	680x710x1180

HY–专用散热器








专用散热器简介：

结构紧凑、占地面积小、热效率高，大大缩短了安装工程，造价只是传统水暖的1/3。
安装简单快捷，只需和热水进出口链接，接上电源即可。
外观美观大方，可以吊挂安装，节省空间。


主要技术参数

翅片式散热器	
结构形式	翅片管
外形尺寸（长 x 宽 x 厚）mm	600x700x50
散热器排列形式及数量	竖式、42 支
散热管内壁厚 mm	1–1.5mm
使用压力（Mpa）	瞬间≤0.6/长期≤0.3
重量	9–9.3kg



翅片式

口琴式散热器	
结构形式	口琴管散热带
外形尺寸（长 x 宽 x 厚）mm	600x700x50
散热器排列形式及数量	口琴管 38 支/散热带 39 根，76
管、带壁厚 mm	管0.76–1.3/带 0.12
使用压力（Mpa）	瞬间≤0.4/长期≤0.2
重量	6–7.3kg
热效率	10kw
风量	2900m^3



口琴式





HY–新风散热器

热效率高，比一般采暖器要高出10%以上。通过以风机为媒体介代替了普通采暖器的自然散热为强制散热，从根本上解决了单纯用水暖升温慢的弊病。

产品大部分的热量是通过水来传导的，水能够蕴藏较多的热量，慢慢的散发出来，使室内的温度升降都比较均匀，不会出现纯风暖热风机一停送风机温度就急剧下降的情况。以水为介质进行热的传递，彻底解决了传统出风暖热风机吹出热风吸收空气中水分的问题。极大的节省了能源，在当今能源价格不断上涨的时候，为客户节约了大量资金，有良好的经济效益。

■技术参数

规格型号	额定热风量（m^3/h）	工作介质	热媒温度（℃）	外形尺寸（mm）	散热量（kw/min）	电源（v）	供暖面积（m^2）
HY–70	3000	水	60–80	700×700	22.6	220/380	150–200
HY–80	4000	水	60–80	800×800	29	220/380	200–300
HY–90	5000	水	60–80	800×800	36.5	220/380	300–400
HY–100	6000	水	60–80	1000×1000	45	220/380	400–500

由于产品不断更新，技术参数如有改动恕不另行通知。


HY-温室资材








PC板温室




阳光板



钢管



温室薄膜



遮阳网



苗床



喷灌



滴灌



温室骨架

健 康 环 境 缔 造 专 家


MODERN FARMING
现代牧业


立華
Lihua


双胞胎


诸城外贸
ZHUCHENG WAIMAO


佳宝乳业
始于1932年


大象农牧
DAXIANG FARMING


TRS唐人神
中国生猪全产业链经营领电者


现代畜牧业


新大牧业
XINDAMUYE