

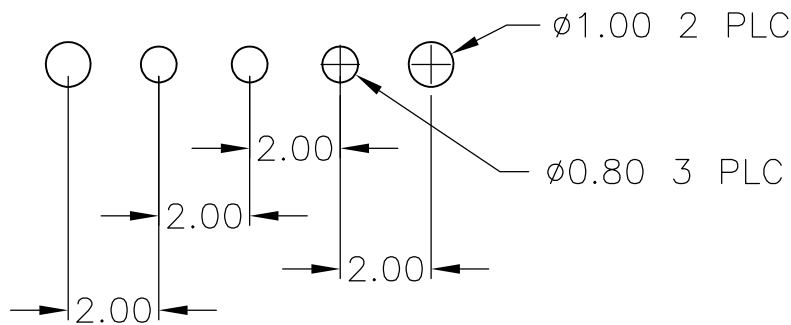
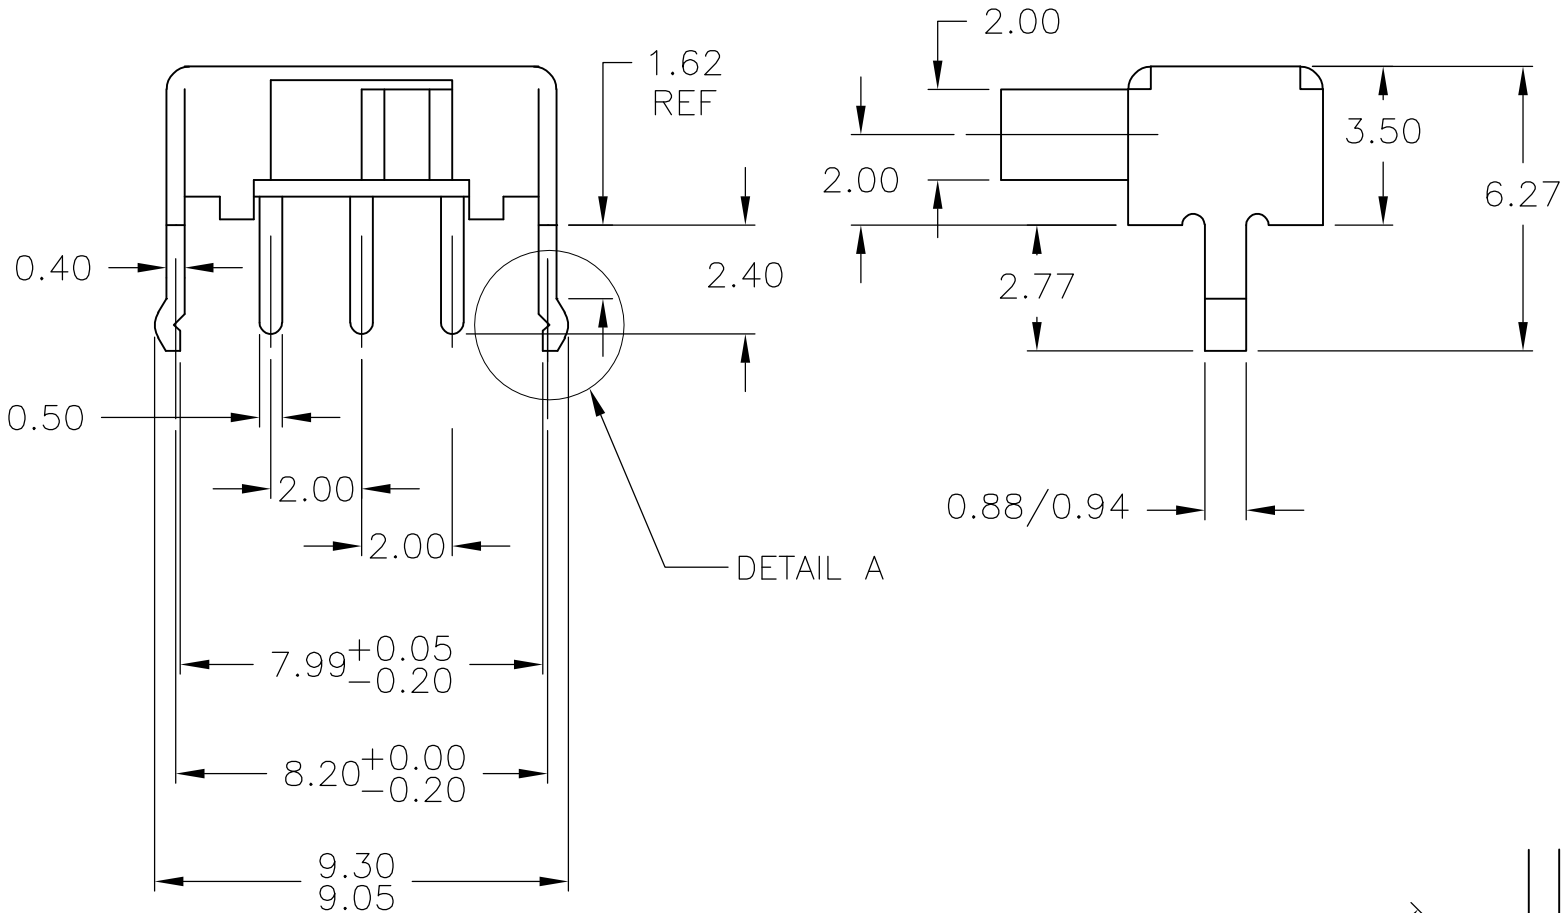
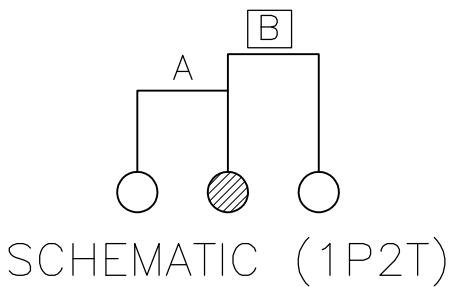


| LOC | DIST | REVISIONS |     |                           |         |     |      |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
|     |      | P         | LTR | DESCRIPTION               | DATE    | DWN | APVD |
| AD  | 00   |           | B2  | REVISED PER ECO-10-008611 | 24APR10 | HMR | NE   |

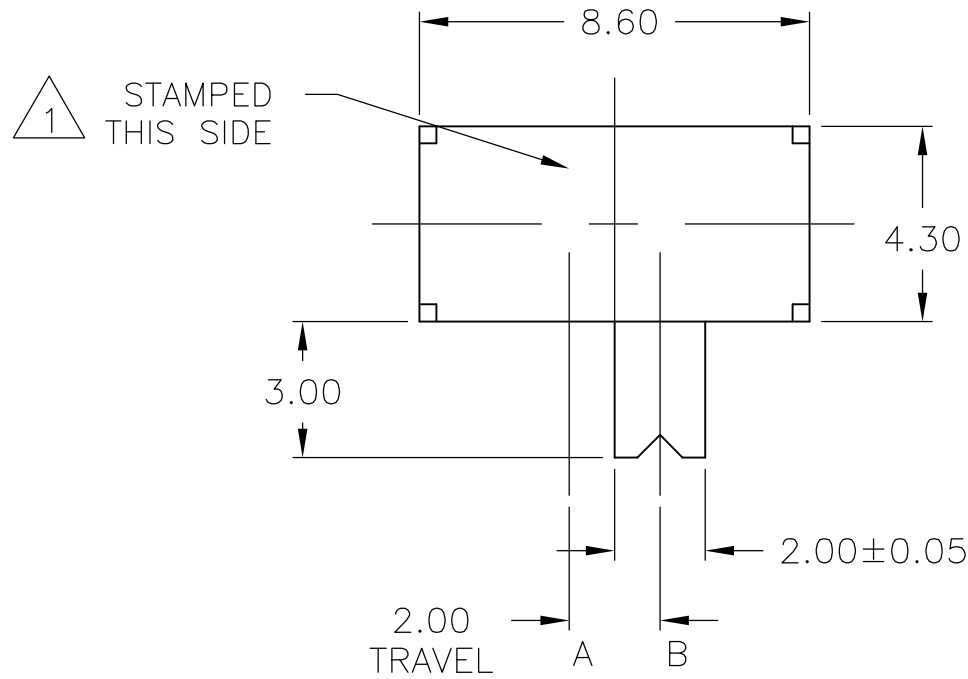

RECOMMENDED HOLE LAYOUT

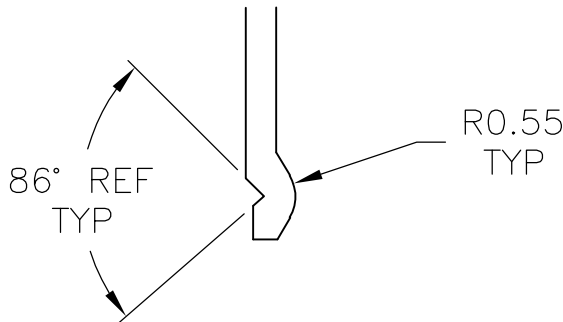

DETAIL A  
SCALE 10:1

SPECIFICATIONS:  
SINGLE POLE DOUBLE THROW  
BREAK-BEFORE-MAKE

MATERIALS:  
FRAME: STEEL, TIN PLATE  
BOARD: PHENOLIC, NATURAL  
ACTUATOR: POM  
TERMINAL: COPPER ALLOY, FINISH: SILVER/NICKEL  
CONTACT: COPPER ALLOY, FINISH: SILVER

ELECTRICAL:  
CONTACT RATING, .2A@ 30V DC, PER EIA-448, METHOD 6  
INITIAL CONTACT RESISTANCE, 20 MILLIOHMS MAX, PER EIA-364-23B, EACH POSITION  
INSULATION RESISTANCE, 100 MEGOHM MIN. PER EIA-364-21C EACH POSITION  
DIELECTRIC STRENGTH, 500 VOLT AC, PER EIA-364-20B, CONDITION 1, EACH POSITION

MECHANICAL:  
ACTUATION FORCE, 200+/-100 GF  
ACTUATION TRAVEL, 2.0 MM  
LIFE EXPECTANCY, 10,000 CYCLES, PER EIA-448, METHOD 8 AND 9  
VIBRATION, PER EIA 364-28, CONDITION VII, LEVEL E  
MECHANICAL SHOCK, PER EIA-364-27, CONDITION A

ENVIRONMENTAL:  
OPERATING TEMPERATURE, -20 TO +70 DEGREES C, PER EIA 448, METHOD 10  
STORAGE TEMPERATURE, -25 TO +85 DEGREES C  
HUMIDITY AND TEMPERATURE CYCLING PER EIA-364-31B, METHOD III  
TEMPERATURE LIFE PER EIA-364-17B, METHOD B, TEMPERATURE TEST CONDITION 3, TIME CONDITION B  
THERMAL SHOCK, PER EIA-364-32C, -25 TO 85 DEGREES C  
SOLDERABILITY, PER EIA-364-52, CLASS 2, CATEGORY 1, 95% MINIMUM COVERAGE  
RESISTANCE TO SOLDER HEAT, PER 109-202, CONDITION B

- 1 COUNTRY OF ORIGIN AND TE LOGO LOCATED APPROXIMATELY AS SHOWN
- 2 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)".

1825232

B

A

|                                        |  |                     |          |         |                                                           |           |            |               |
|----------------------------------------|--|---------------------|----------|---------|-----------------------------------------------------------|-----------|------------|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN                 | R BROWN  | 29MAR05 | Tyco Electronics Corporation<br>Harrisburg, PA 17105-3608 |           |            |               |
| DIMENSIONS:<br>mm                      |  | CHK                 | M SARVER | 29MAR05 |                                                           |           |            |               |
|                                        |  | APVD                | M SARVER | 29MAR05 | NAME                                                      |           |            |               |
|                                        |  | PRODUCT SPEC        |          |         | SLIDE SWITCH,<br>RIGHT ANGLE                              |           |            |               |
| MATERIAL<br>SEE NOTES                  |  | APPLICATION SPEC    |          |         | SIZE                                                      | CAGE CODE | DRAWING NO | RESTRICTED TO |
|                                        |  | FINISH<br>SEE NOTES |          |         | A2                                                        | 00779     | C=1825232  | —             |
|                                        |  | WEIGHT              |          |         |                                                           |           |            |               |
|                                        |  | CUSTOMER DRAWING    |          |         | SCALE                                                     | 6:1       | SHEET      | 1 OF 1        |
|                                        |  |                     |          |         | REV                                                       |           |            |               |
|                                        |  |                     |          |         | B2                                                        |           |            |               |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1825232-1](#)