


OTHER SURFACES 3.2

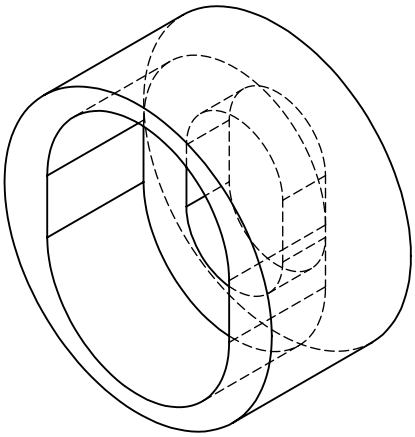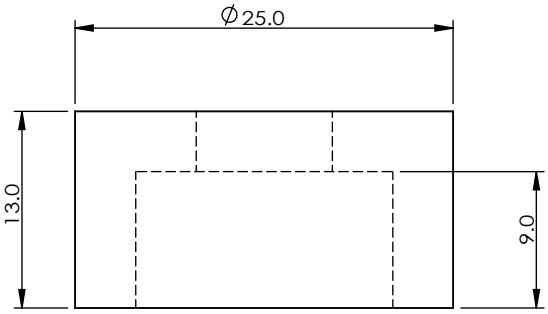

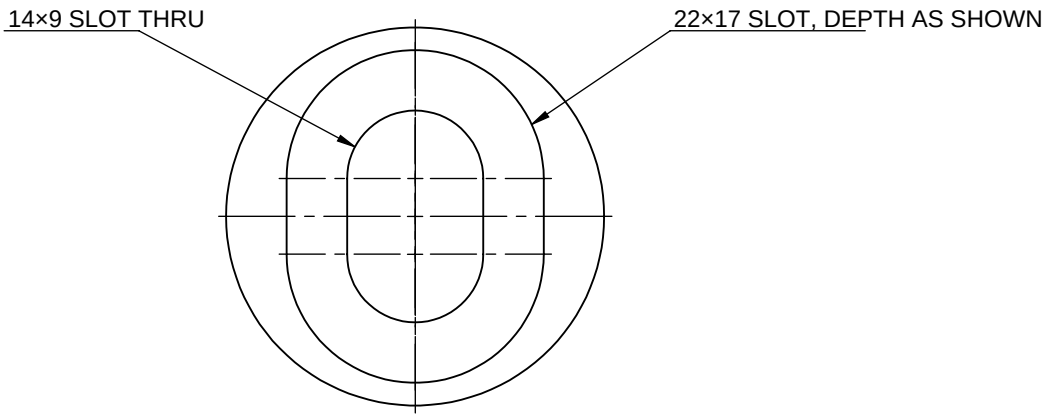


TECHNICAL REQUIREMENTS
1. Mark the drawing number on the workpiece. All dimensions are final dimensions.
2. Unless otherwise specified, chamfer hole edges and sharp edges C0.5.
3. Surfaces shall be smooth and free of scratches, dents, burrs and other visible defects.
4. Use 100-mesh fine abrasive for sandblasting.
5. All dimensions are in mm.
6. Dimensional tolerances for all screw holes and counterbores shall be +/-0.20mm, regardless of manufacturing process.

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

| | | | |
|---|---|---|---|
| X. | ± 0.5 | X.° | ± 1° |
| .X | ± 0.2 | .X° | ± 0.5° |
| .XX | ± 0.05 | .XX° | ± 0.1° |
| .XXX | ± 0.01 | .XXX° | ± 0.01° |

For sheet metal, welding, casting, stamping and similar processes, unspecified linear and geometric tolerances shall conform to in-house standards.

MATERIAL: Q235
FINISH: CHROME PLATED
QTY:

EQUIPMENT NAME: POWERTRAIN FLEXIBLE ASSEMBLY LINE: HOUSING END-FACE ADHESIVE APPLICATION
EQUIPMENT NO.
APPROVED
CHECKED
DESIGNED
DRAWN

BARCODE
DRAWING NO.

| SCALE | SHEET | REV. |
|---|---|---|
| 2:1 | 1/1 | X1 |