


OTHER SURFACES 1.6

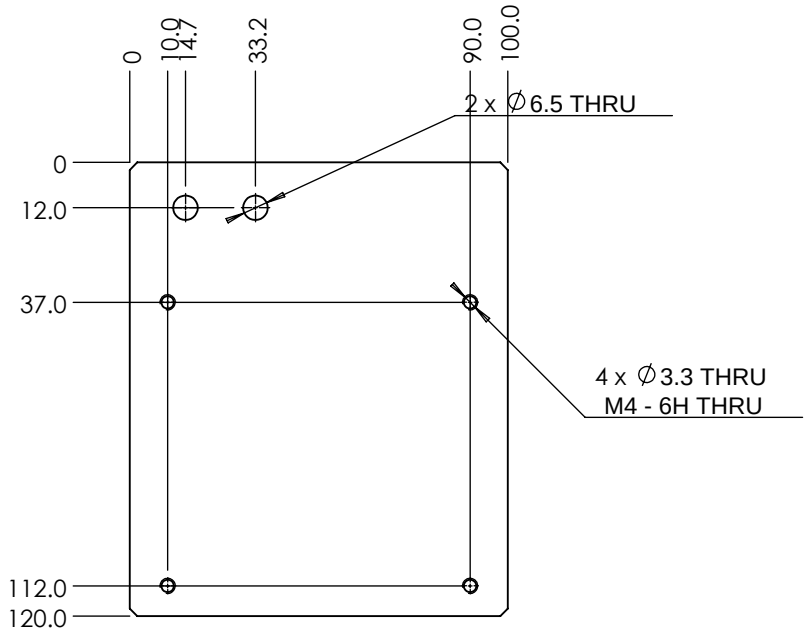



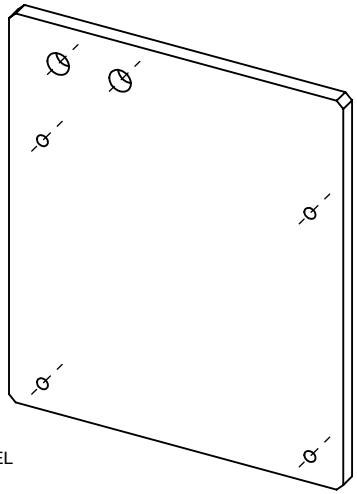

UNSPEC. DIMS. PER 3D MODEL

TECHNICAL REQUIREMENTS
1. Mark the drawing number on the workpiece. All dimensions are final dimensions.
2. Unless otherwise specified, chamfer hole edges and sharp edges C0.5.
3. Surfaces shall be smooth and free of scratches, dents, burrs and other visible defects.
4. Use 100-mesh fine abrasive for sandblasting.
5. All dimensions are in mm.
6. Dimensional tolerances for all screw holes and counterbores shall be +/-0.20mm, regardless of manufacturing process.

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

X.	± 0.5	X.°	± 1°
X	± 0.2	.X°	± 0.5°
.XX	± 0.05	.XX°	± 0.1°
.XXX	± 0.01	.XXX°	± 0.01°

For sheet metal, welding, casting, stamping and similar processes, unspecified linear and geometric tolerances shall conform to in-house standards.

MATERIAL: AL6061

FINISH: FINE SANDBLASTED, BRIGHT SILVER OXIDE FINISH

QTY: ENTER PART QUANTITY

EQUIPMENT NAME: O-ring to crown to HSG for Crown Auto Sub

EQUIPMENT NO.

APPROVED

CHECKED

DESIGNED

DRAWN

BARCODE

DRAWING NO.

SCALE	SHEET	REV.
1:1	1/1	X1