

OTHER SURFACES 1.6

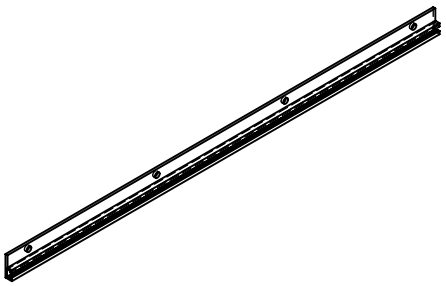

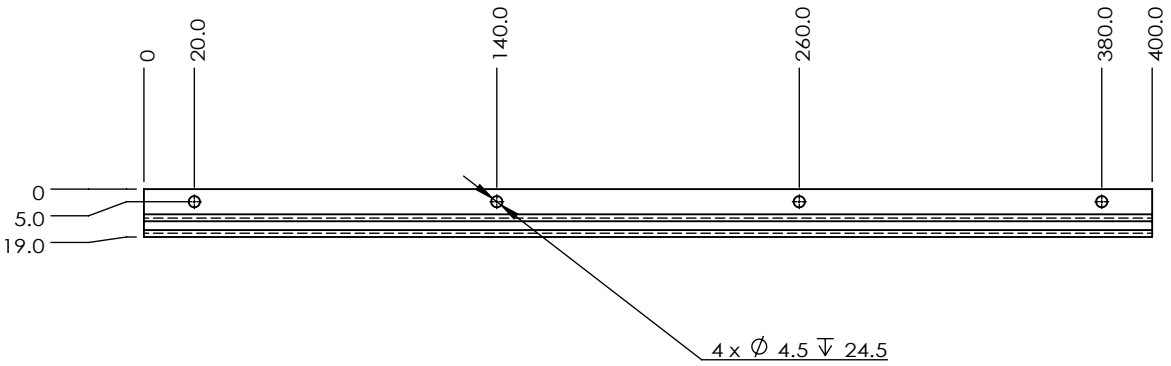

SECONDARY MACHINING OF ATS05-619-L400

Machine unspecified chamfers according to the 3D model.

TECHNICAL REQUIREMENTS
1. Mark the drawing number on the workpiece. All dimensions are final dimensions.
2. Unless otherwise specified, chamfer hole edges and sharp edges C0.5.
3. Surfaces shall be smooth and free of scratches, dents, burrs and other visible defects.
4. Use 100-mesh fine abrasive for sandblasting.
5. All dimensions are in mm.
6. Dimensional tolerances for all screw holes and counterbores shall be +/-0.20mm, regardless of manufacturing process.

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

X.	± 0.5	X.°	± 1°
.X	± 0.2	.X°	± 0.5°
.XX	± 0.05	.XX°	± 0.1°
.XXX	± 0.01	.XXX°	± 0.01°

For sheet metal, welding, casting, stamping and similar processes, unspecified linear and geometric tolerances shall conform to in-house standards.

MATERIAL
SECONDARY MACHINING

FINISH
SECONDARY MACHINING

QTY

EQUIPMENT NAME
ROUND NUT TIGHTENING AND STEEL RING PRESS-FITTING

EQUIPMENT NO.

APPROVED

CHECKED

DESIGNED

DRAWN

BARCODE

DRAWING NO.

SCALE	SHEET	REV.
1:5	1/1	X01