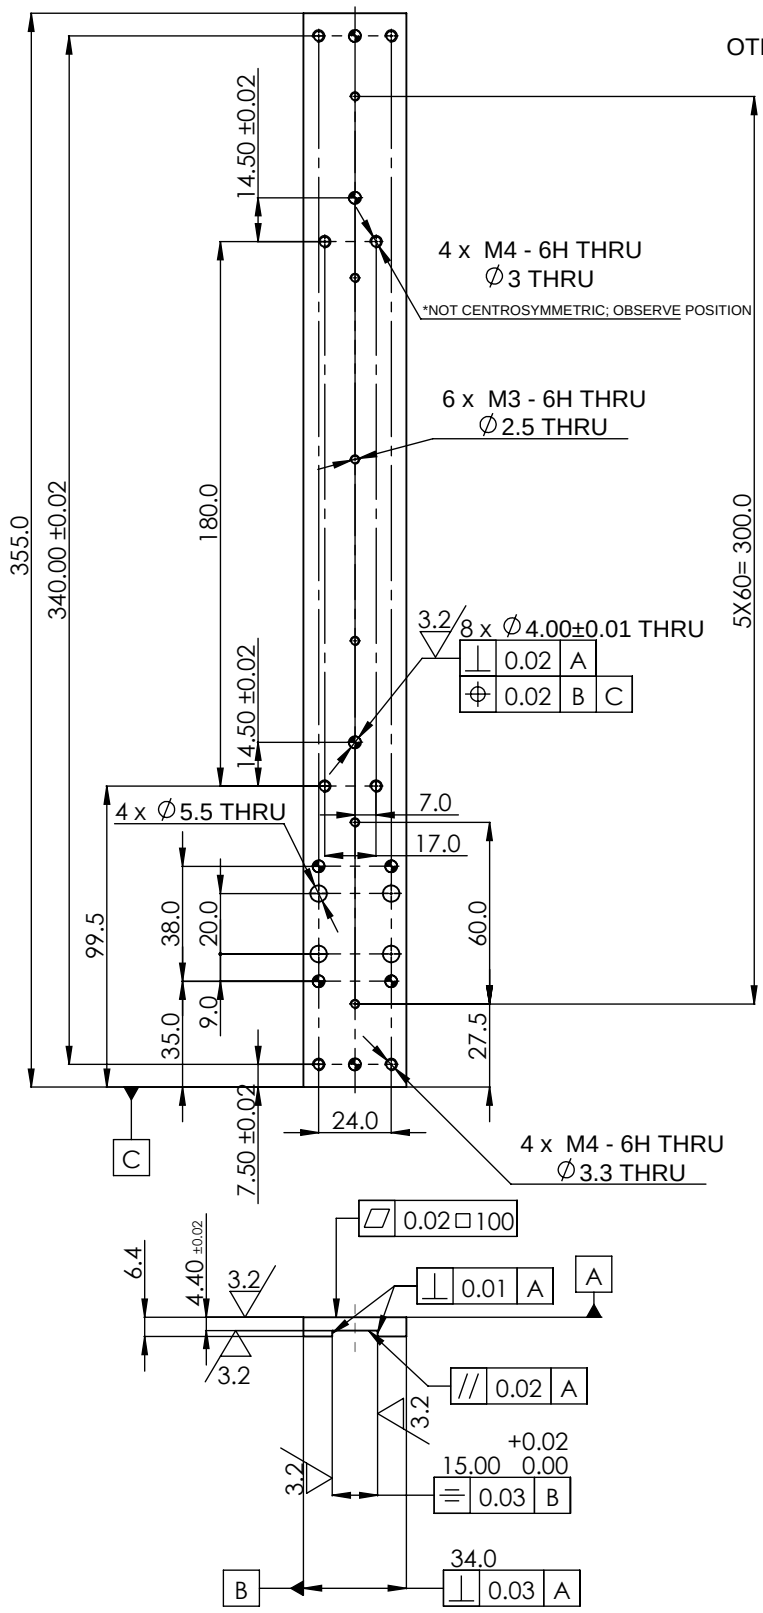


Follow the 3D model for unspecified dimensions. Nickel plating thickness per side: 3-5μm.

QUENCHED AND TEMPERED

TECHNICAL REQUIREMENTS
1. Mark the drawing number on the workpiece. All dimensions are final dimensions.
2. Unless otherwise specified, chamfer hole edges and sharp edges C0.5.
3. Surfaces shall be smooth and free of scratches, dents, burrs and other visible defects.
4. Use 100-mesh fine abrasive for sandblasting.
5. All dimensions are in mm.
6. Dimensional tolerances for all screw holes and counterbores shall be +/-0.20mm, regardless of manufacturing process.

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

X.	± 0.5	X.°	± 1°
.X	± 0.2	.X°	± 0.5°
.XX	± 0.05	.XX°	± 0.1°
.XXX	± 0.01	.XXX°	± 0.01°

For sheet metal, welding, casting, stamping and similar processes, unspecified linear and geometric tolerances shall conform to in-house standards.

MATERIAL: 45

FINISH: NICKEL PLATED

QTY: 1

EQUIPMENT NAME: Tap/lock INSERTION AND PRESS-FIT EQUIPMENT

EQUIPMENT NO.

APPROVED

CHECKED

DESIGNED

DRAWN

BARCODE

DRAWING NO.

SCALE	SHEET	REV.
1:5	1/1	X01