Rover / TVR Lucas Hotwire
Modified for MegaSquirt ECU
www.ExtraEFI.co.uk

Please Note:
All wiring MUST be checked to ensure your setup is the same as this drawing.
Use ENIRELY at your own risk, no warranty expressed or implied.
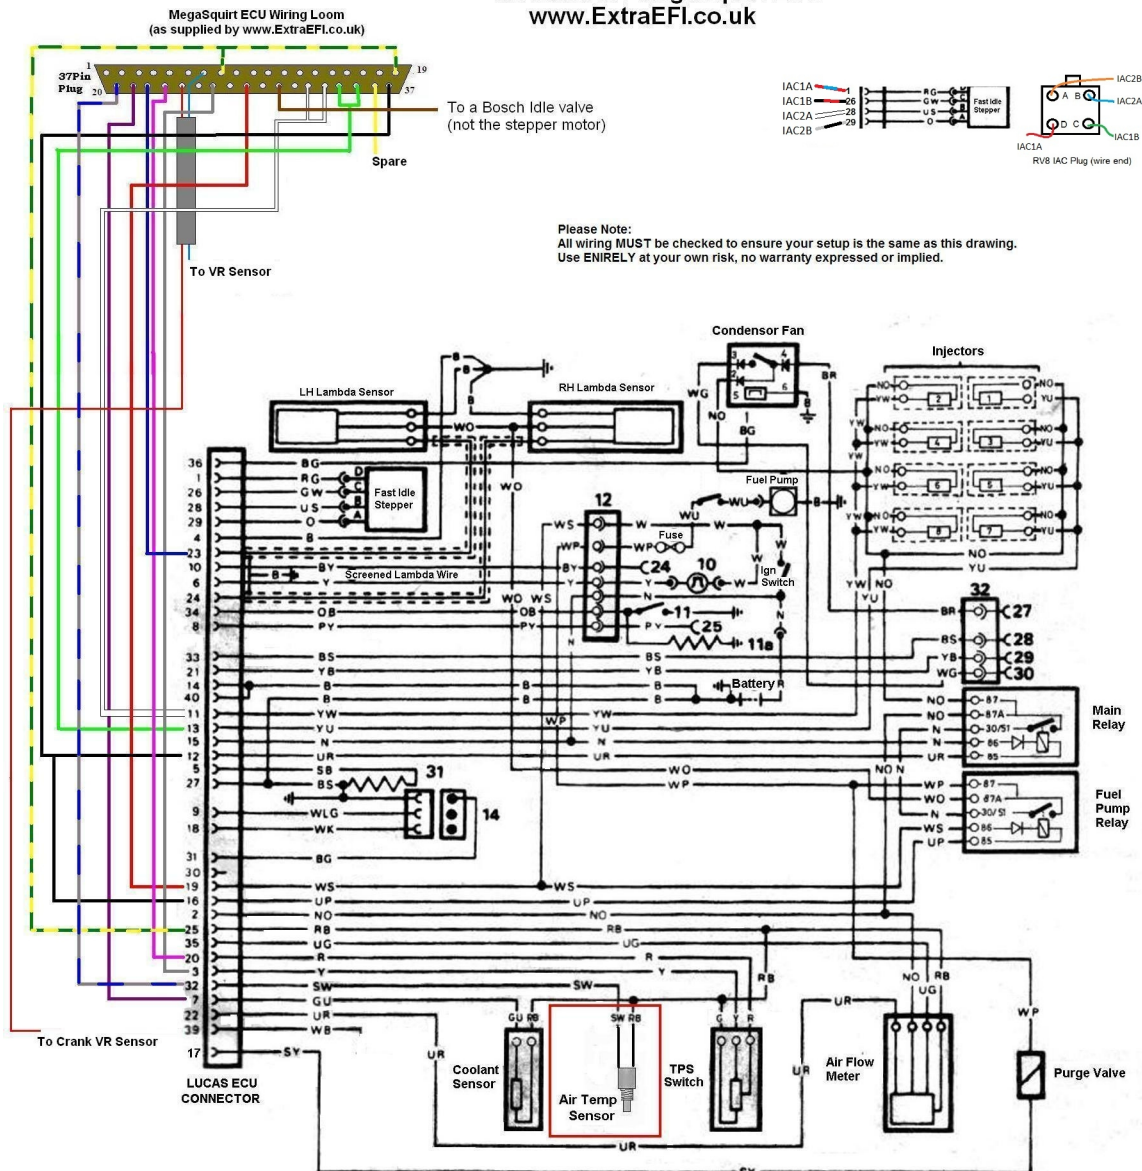
	Rover TVR Hotwire EFI Lucas plug to Megasquirt Plug		
	Lucas Plug	**Megasquirt Plug**	
3	Vref to throttle pot		26
7	Coolant Sensor Input		21
11	Injectors Bank A		32
13	Injectors Bank B		34
19	12V feed from Ignition		28
20	Throttle pot input		22
23	O2 Sensor input (LH Side Lambda)		23
25	Gnd for sensors		8
39	Distributor Pulse	Depending if hall sensor or coil -ve input	24
12 + 16	Fuel Pump and Main Relay	Connect both 12 + 16 together in Lucas Plug	37
14 + 27 + 40	Gnd	Main Ground Cable (4mm)	9 + 10
32	Air Temp Sensor	Remove Fuel Temp sensor plug and use for Air Temp sensor	20
	P Ringwood 22/6/07 www.ExtraEFI.co.uk		

www.ExtraEFI.co.uk