
NOTES:


1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK

2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ"GOLD FLASH OVERALL 50~100μ"NICKEL UNDER PLATED.


3.CODING INFORMATION: LB245-GxxP-B0R

- PACKING: R: CARRIER REEL
- STANDARD TYPE
- COLOR:BLACK
- PLUG
- PIN
- PLATING: G:GOLD FLASH
- 0.5 BTB
  MATING HEIGHT: 30--3.0H;35--3.5H;
  40--4.0H;45--4.5H;
  50--5.0H;55--5.5H;
  60--6.0H;65--6.5H;
- LXWCONN BTB CONNECTOR SERIES

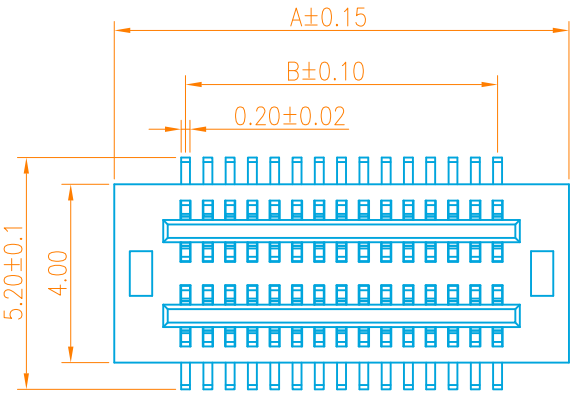





MATING HEIGHT
SCALE:1.25:1





3D VIEW

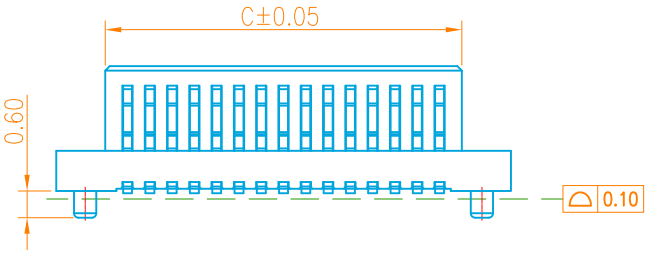

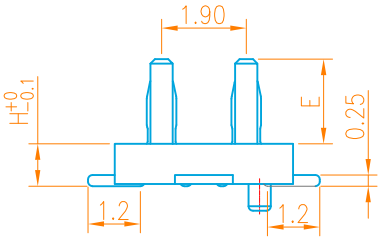

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	E	NO.of contacts	Dimensions A.	B.	C.	D.	NO.of contacts	Dimensions A.	B.	C.	D.
3.0	0.8	2.2	1.6	4	3.70	0.50	1.50	2.40	54	16.20	13.00	14.00	14.90
3.5	1.3	2.2	1.6	6	4.20	1.00	2.00	2.90	56	16.70	13.50	14.50	15.40
4.0	1.0	3.0	1.9	8	4.70	1.50	2.50	3.40	58	17.20	14.00	15.00	15.90
4.5	1.0	3.5	1.9	10	5.20	2.00	3.00	3.90	60	17.70	14.50	15.50	16.40
5.0	1.0	4.0	1.9	12	5.70	2.50	3.50	4.40	62	18.20	15.00	16.00	16.90
5.5	2.0	4.5	1.9	14	6.20	3.00	4.00	4.90	64	18.70	15.50	16.50	17.40
6.0	2.0	4.0	1.9	16	6.70	3.50	4.50	5.40	66	19.20	16.00	17.00	17.90
6.5	2.0	4.5	1.9	18	7.20	4.00	5.00	5.90	68	19.70	16.50	17.50	18.40
				20	7.70	4.50	5.50	6.40	70	20.20	17.00	18.00	18.90
				22	8.20	5.00	6.00	6.90	72	20.70	17.50	18.50	19.40
				24	8.70	5.50	6.50	7.40	74	21.20	18.00	19.00	19.90
				26	9.20	6.00	7.00	7.90	76	21.70	18.50	19.50	20.40
				28	9.70	6.50	7.50	8.40	78	22.20	19.00	20.00	20.90
				30	10.20	7.00	8.00	8.90	80	22.70	19.50	20.50	21.40
				32	10.70	7.50	8.50	9.40	82	23.20	20.00	21.00	21.90
				34	11.20	8.00	9.00	9.90	84	23.70	20.50	21.50	22.40
				36	11.70	8.50	9.50	10.40	86	24.20	21.00	22.00	22.90
				38	12.20	9.00	10.00	10.90	88	24.70	21.50	22.50	23.40
				40	12.70	9.50	10.50	11.40	90	25.20	22.00	23.00	23.90
				42	13.20	10.00	11.00	11.90	92	25.70	22.50	23.50	24.40
				44	13.70	10.50	11.50	12.40	94	26.20	23.00	24.00	24.90
				46	14.20	11.00	12.00	12.90	96	26.70	23.50	24.50	25.40
				48	14.70	11.50	12.50	13.40	98	27.20	24.00	25.00	25.90
				50	15.20	12.00	13.00	13.90	100	27.70	24.50	25.50	26.40

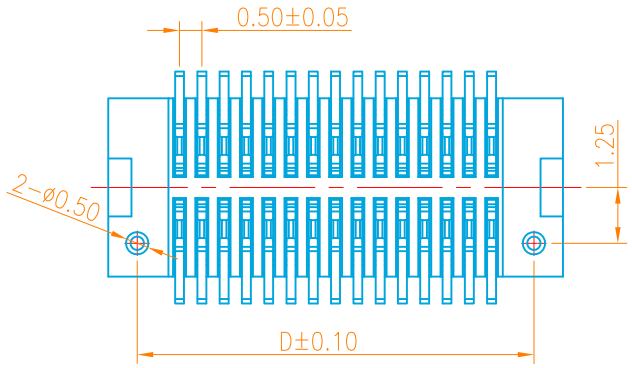

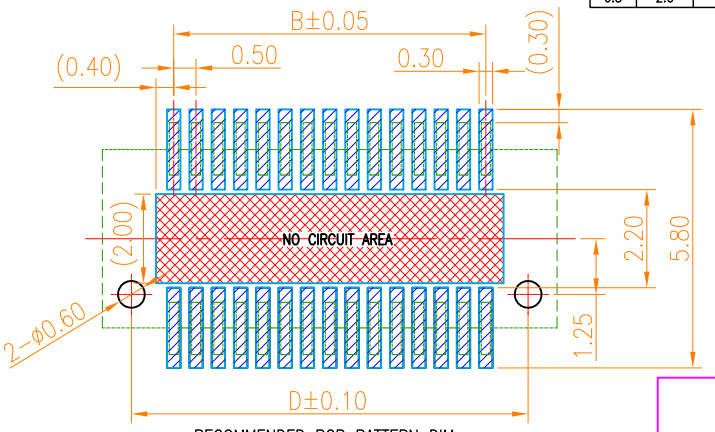

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

RoHS Compliant 2013/95/EC

Pb Process Capable

修订 SER	修 改 摘 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE

一 般 公 差 GENERAL TOLERANCE
.X ±0.25
.XX ±0.15
.XXX ±0.05
ANGLES ±1°

制图 (DR): Kavin 2016.07.05	品名(TITLE): 0.5mm 双槽BTB PLUG		
审核 (CHKD):	料号 (PART NO): LB245-GxxP-B0R		
版本 (REV) A	核准 (APPD):	比例(SCALE) 1:8	单位(UNITS) mm	张数(SHEET) 1 OF 1	图幅(SIZE) A4


NOTES:


1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK

2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ"GOLD FLASH OVERALL 50~100μ"NICKEL UNDER PLATED.


3.CODING INFORMATION: LB245-GxxS-B0R

- PACKING: R: CARRIER REEL
- STANDARD TYPE
- COLOR:BLACK
- SOCKET
- PIN
- PLATING: G:GOLD FLASH
- 0.5 BTB
- MATING HEIGHT: 30--3.0H;35--3.5H; 40--4.0H;45--4.5H; 50--5.0H;55--5.5H; 60--6.0H;65--6.5H;
- LXWCONN BTB CONNECTOR SERIES

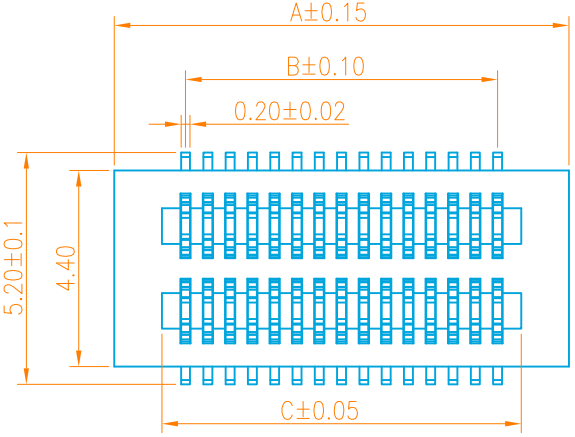






MATING HEIGHT
SCALE:1.25:1




3D VIEW

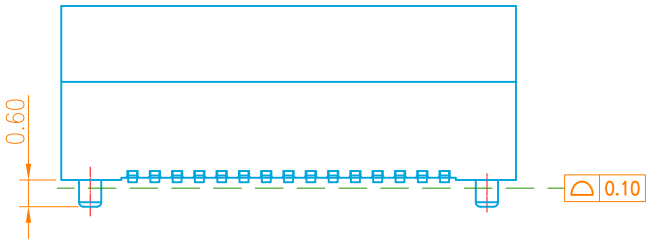

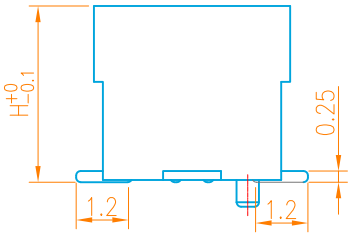

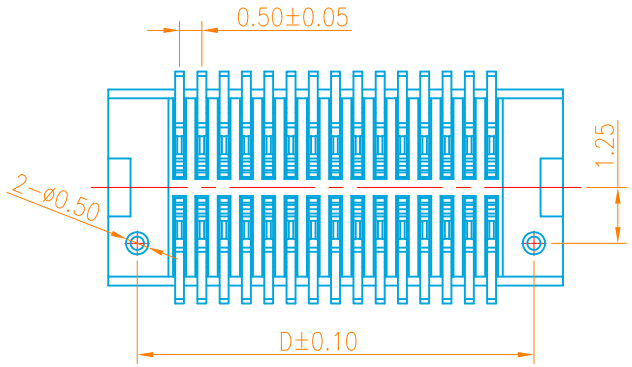

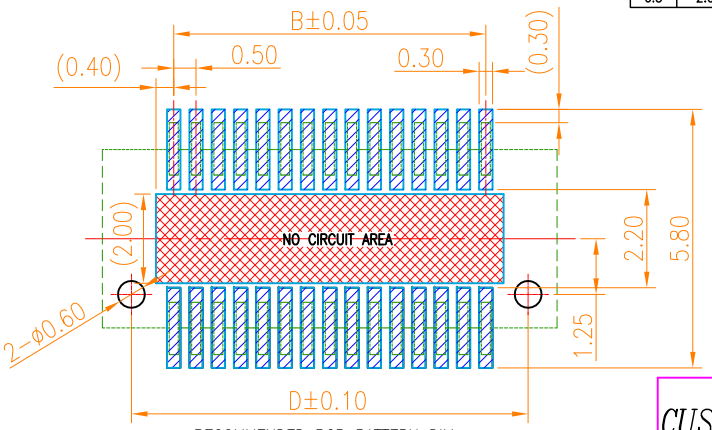

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	NO.of contacts	Dimensions A.	B.	C.	D.	NO.of contacts	Dimensions A.	B.	C.	D.
3.0	0.8	2.2	4	3.70	0.50	1.56	2.40	54	16.20	13.00	14.06	14.90
3.5	1.3	2.2	6	4.20	1.00	2.06	2.90	56	16.70	13.50	14.56	15.40
4.0	1.0	3.0	8	4.70	1.50	2.56	3.40	58	17.20	14.00	15.06	15.90
4.5	1.0	3.5	10	5.20	2.00	3.06	3.90	60	17.70	14.50	15.56	16.40
5.0	1.0	4.0	12	5.70	2.50	3.56	4.40	62	18.20	15.00	16.06	16.90
5.5	2.0	4.5	14	6.20	3.00	4.06	4.90	64	18.70	15.50	16.56	17.40
6.0	2.0	4.0	16	6.70	3.50	4.56	5.40	66	19.20	16.00	17.06	17.90
6.5	2.0	4.5	18	7.20	4.00	5.06	5.90	68	19.70	16.50	17.56	18.40
			20	7.70	4.50	5.56	6.40	70	20.20	17.00	18.06	18.90
			22	8.20	5.00	6.06	6.90	72	20.70	17.50	18.56	19.40
			24	8.70	5.50	6.56	7.40	74	21.20	18.00	19.06	19.90
			26	9.20	6.00	7.06	7.90	76	21.70	18.50	19.56	20.40
			28	9.70	6.50	7.56	8.40	78	22.20	19.00	20.06	20.90
			30	10.20	7.00	8.06	8.90	80	22.70	19.50	20.56	21.40
			32	10.70	7.50	8.56	9.40	82	23.20	20.00	21.06	21.90
			34	11.20	8.00	9.06	9.90	84	23.70	20.50	21.56	22.40
			36	11.70	8.50	9.56	10.40	86	24.20	21.00	22.06	22.90
			38	12.20	9.00	10.06	10.90	88	24.70	21.50	22.56	23.40
			40	12.70	9.50	10.56	11.40	90	25.20	22.00	23.06	23.90
			42	13.20	10.00	11.06	11.90	92	25.70	22.50	23.56	24.40
			44	13.70	10.50	11.56	12.40	94	26.20	23.00	24.06	24.90
			46	14.20	11.00	12.06	12.90	96	26.70	23.50	24.56	25.40
			48	14.70	11.50	12.56	13.40	98	27.20	24.00	25.06	25.90
			50	15.20	12.00	13.06	13.90	100	27.70	24.50	25.56	26.40

RoHS Compliant 2013/95/EC

Pb Process Capable

修订 SER	修 改 摘 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE

CUSTOMER

连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD

一般公差 GENERAL TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	制图 (DR): Kavin 2016.07.05	品名(TITLE): 0.5mm 双槽BTB SOCKET	
	审核 (CHKD):	料号 (PART NO): LB245-GxxS-B0R	
版本 (REV) A	核准 (APPD):	比例(SCALE) 1:8	单位(UNITS) mm
		张数(SHEET) 1 OF 1	图幅(SIZE) A4