



深圳市纬视达科技有限公司

Shenzhen Weishida Technology Co., Limited

地址: 深圳市龙华区大浪街道龙泉科技园 A 区 A 栋 4 楼

产品规格承认书

product specification acknowledgment

400 万摄像头模组

4MP infrared camera module

型号(Model):WSD-4210-V1.0

客户名称:
Customer Name:
客户地址:
Address:
送样日期: ____年__月__日
Date samples:
确认回签:
Approve

内 容 CONTENT			
一、 目的 Target.....2			
二、 效力 Effect.....2			
三、 技术参数 Technical parameters.....3			
四、 尺寸 Shape and Dimensions.....4			
五、 产品图片 product picture.....5			
六、 外观检验标准 Appearance test.....5			
七、 可靠性测试 Reliability Test.....6			
八、 包装要求 Packaging requirements.....7			
九、 其他 Other7			
版本 Version	编写 Compile	审核 Auditing	批准 Authorize
V1.0	Liang		
分发编号(Distribution No.)	存储编号(Store No.)	附件数(Attachment No.)	
无	无	无	



一、目的 (Purpose)

为了全面地描述技术合作中所指的技术规格，通常需要由一整套文件予以表示。作为其中的一部分，本技术规格规定了摄像头模组应达到的特定技术规格，对于该型号货品具有约束力。

For a comprehensive description of technical cooperation referred to the technical specifications, usually a set of documents required by the express. As one part of the technical specifications of the notebook provides ca camera modules mere modules should meet the specific technical specifications for the goods model binding.

二、效力 (effect)

如果本规范与该类货品的通用技术规格书中的规格不一致时，以本规格书中的规定为准。

If the norms of such goods with a common technical specifications of the specification book is inconsistent to the specifications book shall prevail.




三、技术参数 (Technical parameters)

项目 (Items)	参数 (Parameters)
模块大小 (Module Size)	38mm×38mm×24.2mm±0.2mm
图像传感器 (CMOS)	1/1.8inch
图像像素 (Image pixels)	4M(2K)
输出格式 (Output Formats)	MJPEG/YUY2
最大分辨率 (Maximum resolution)	2560×1440
像素大小 (Pixel Size)	3 μm×3 μm
目标距离 (Object distance)	30CM-infinity
帧速 (Frame rate)	MJPEG 240×320 60fps / YUY2 240×320 30fps MJPEG 352×288 60fps / YUY2 352×288 30fps MJPEG 640×480 60fps / YUY2 640×480 30fps MJPEG 800×600 60fps / YUY2 800×600 20fps MJPEG 1280×720 60fps / YUY2 1280×720 10fps MJPEG 1600×1200 60fps / YUY2 1600×1200 5fps MJPEG 1920×1080 60fps / YUY2 1920×1080 5fps MJPEG 2048×1536 60fps / YUY2 2048×1536 2fps MJPEG 2560×1440 60fps / YUY2 2560×1440 2fps
快门类型 (Shutter type)	Electronic rolling shutter
白平衡 (AGC/AEC/Whiter balance)	Auto
麦克风 (Microphone)	NO
接口 (interface)	USB TYPE-C 立式
供电方式 (Power supply)	USB bus power
电源电压 (supply voltage)	DC 5V±5%
睡眠电流 (sleep model current)	<10 mA
工作电流 (working current)	<200 mA
储存温度 (Storage Temperature)	-30° C to +85° C
工作温度 (working Temperature)	-30° C to +80° C
兼容系统 (Operating system request)	Win XP、Win 7/8/10、Win Vista、Android、mac、IOS、Linux with UVC driver 等系统
视场角 (Field of view)	D:100 H:86 V:49
焦距 (Focal-Length)	3.48mm
相对孔径 (F/No)	1.6±5%
滤光片 (IR Filter)	650±10nm
认证 (Certifications)	FCC/CE/ROSH



四，模组尺寸 Shape and Dimensions:

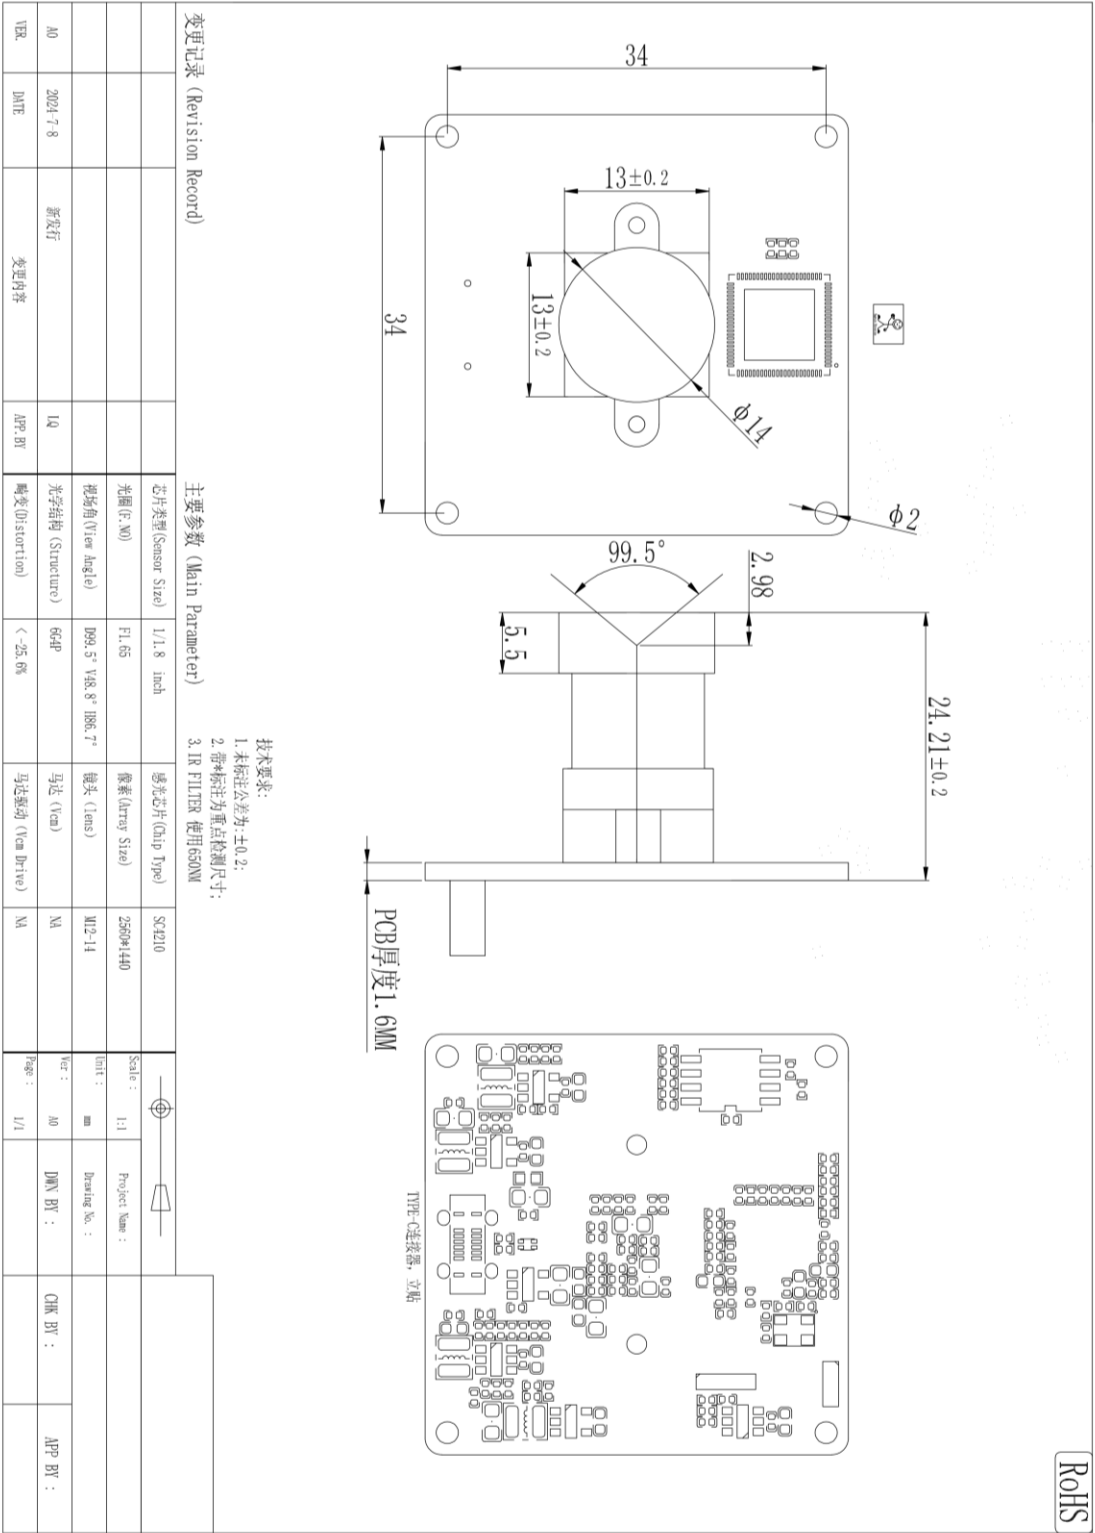



五、产品图片 product picture

六、外观检验标准 (Appearance test standard)

(一) 外观表面定义: (The appearance of the definition)

1. 摄像头模组的外观 (Notebook camera appearance)

(二) 检验方法: (Test methods)

1. 人员: 外观检查人员需经过培训并且辨色能力正常, 其视力应达到 1.0 以上 (矫正后达到 1.0 以上亦可), 辨色能力应可通过标准测试。

Staff: The appearance of the inspectors to be trained and the capacity of normal color vision, Its vision to achieve more than 1.0 (after correction can also be reached more than 1.0), Color vision capability should be available through standard tests.

2. 距离和时间: 观察距离为 50 ~ 75cm, 观察时间为每个表面 3 ~ 5 秒。

Distance and Time: Observation distance: 50 ~ 75cm,

Observation time for each surface: 3 ~ 5seconds

3. 检验环境: 外观检验应在不刺目的荧光灯下检查, 其最低照度应在 100 尺烛光亮度以上, 或者是 60W 日光灯, 1.5m 距离下检验。

Test environment: Appearance inspection should not be under the glare of the fluorescent lamp examination, Its Minimum illumination should be above the brightness of 100 feet candle light vigil.

4. 观察角度: 观察角度在 80 ~ 0 之间。

Observation angle: Observation angle between 8 ~ 0.

(三) 接受标准 (Accept criteria)

1. 清洁程度: 部件必须无污点、无尘、无油脂及无其它污迹。由于运输材料造成的污迹如果能够吹去或抹去则是可以接受的。

Cleanliness: Components must be spotless, dust-free, grease free and free of



other stains. Contamination caused by transport materials is acceptable if it can be blown away or erased.

2. 装配表面：需装配的零部件应避免有划痕、凿痕、凹痕、弯折、破裂、压痕、擦伤或其它因不当装配所引起的缺陷。

Assembly surface: Assembly of parts and components required to have scratches should be avoided, dent, bend, break down, Indentation, scratches or other improper assembly defects.

七、可靠性测试 (Reliability Test)

项目 Items	条件 Condition	规格 Specification
高温实验 High Temperature Test	温度(Temp): 70℃ 时间(Time): 24H	无异常 No abnormal
低温实验 Low Temperature Test	温度(Temp): -20℃ 时间(Time): 24H	无异常 No abnormal
湿度实验 Humidity Test	温度(Temp): 70℃ 湿度(Humidity): 80-85% 时间(Time): 24H	无异常 No abnormal
镜头座拉力实验 Cable Tensile Strength Test	荷重: 4KG 持续时间: 60 秒	无异常 No abnormal
跌落测试 (单体) Drop Test	高(High): 60CM 回数: 10 次 木板上	电性能正常 Electric normal
跌落测试 (整箱) Drop Test	高(High): 60C 一角三边六面 木板上	电性能正常 Electric normal
震动测试 (单体) Vibration Test	1. 震动机的震动频率调至 50Hz; Vibration machine vibration frequency to 50Hz 2. 震动幅度 1.5MM; Vibration amplitude 15MM; 3. 震动时间 Vibration time 30 Minutes	电性能正常 Electric normal
弯曲实验 Bending Test	用弯曲测试治具将 PCBA 弯曲 10 度 Bend PCBA 10 degrees with bending test tool	电性能正常 Electric normal
USB 拔插实验 USB connector	回数: 2500 回	电性能正常 Electric normal



八. 包装要求(Packing Request)

- 1、产品应严格根据产品特点制定相应的包装标准并遵照执行，以保证产品规定使用和储存期内，达到防静电、防湿、防震、防霉、防野蛮装卸等标志及相关保质要求。

Products should be strictly in accordance with the characteristics of the development of the corresponding Product packaging standards and in compliance with the implementation, guarantee the use and storage of products during the period, reaching anti-static, moisture, shock-proof, mildew, anti-barbaric handling related signs and shelf-life requirements.

- 2、产品外包装上应标明：供方名称/标志、产品型号规格、内装数量、生产日期/批号和定单号。

The outer packing of the product shall be marked: Supplier's name/label, Product Type Specifications, Quantity Inside, Date of Production / Lot Number and Order Number.

- 3、包装及装箱方案依据客户要求，由双方协商具体细节，以封样为准。

Packaging and packing programs based on customer requirements, specific details of consultations by both parties, to finished products as the standard.

九. 其它(Others)

1. 本承认书的更改需经双方确认，任何一方单独修改无效。

The recognition of the need to change the book recognized by both parties, either party to amend a separate as null and void.

2. 本承认书在客户收到的七个工作日内，必须签章返回，逾期视为默认。

Admit in the book the customer received within seven working days, must return signature, late regarded as the default