


SayoBot 03C | RP2040–Zero THT + 6 keys

Revision 8 / One schematic part = one PCB footprint

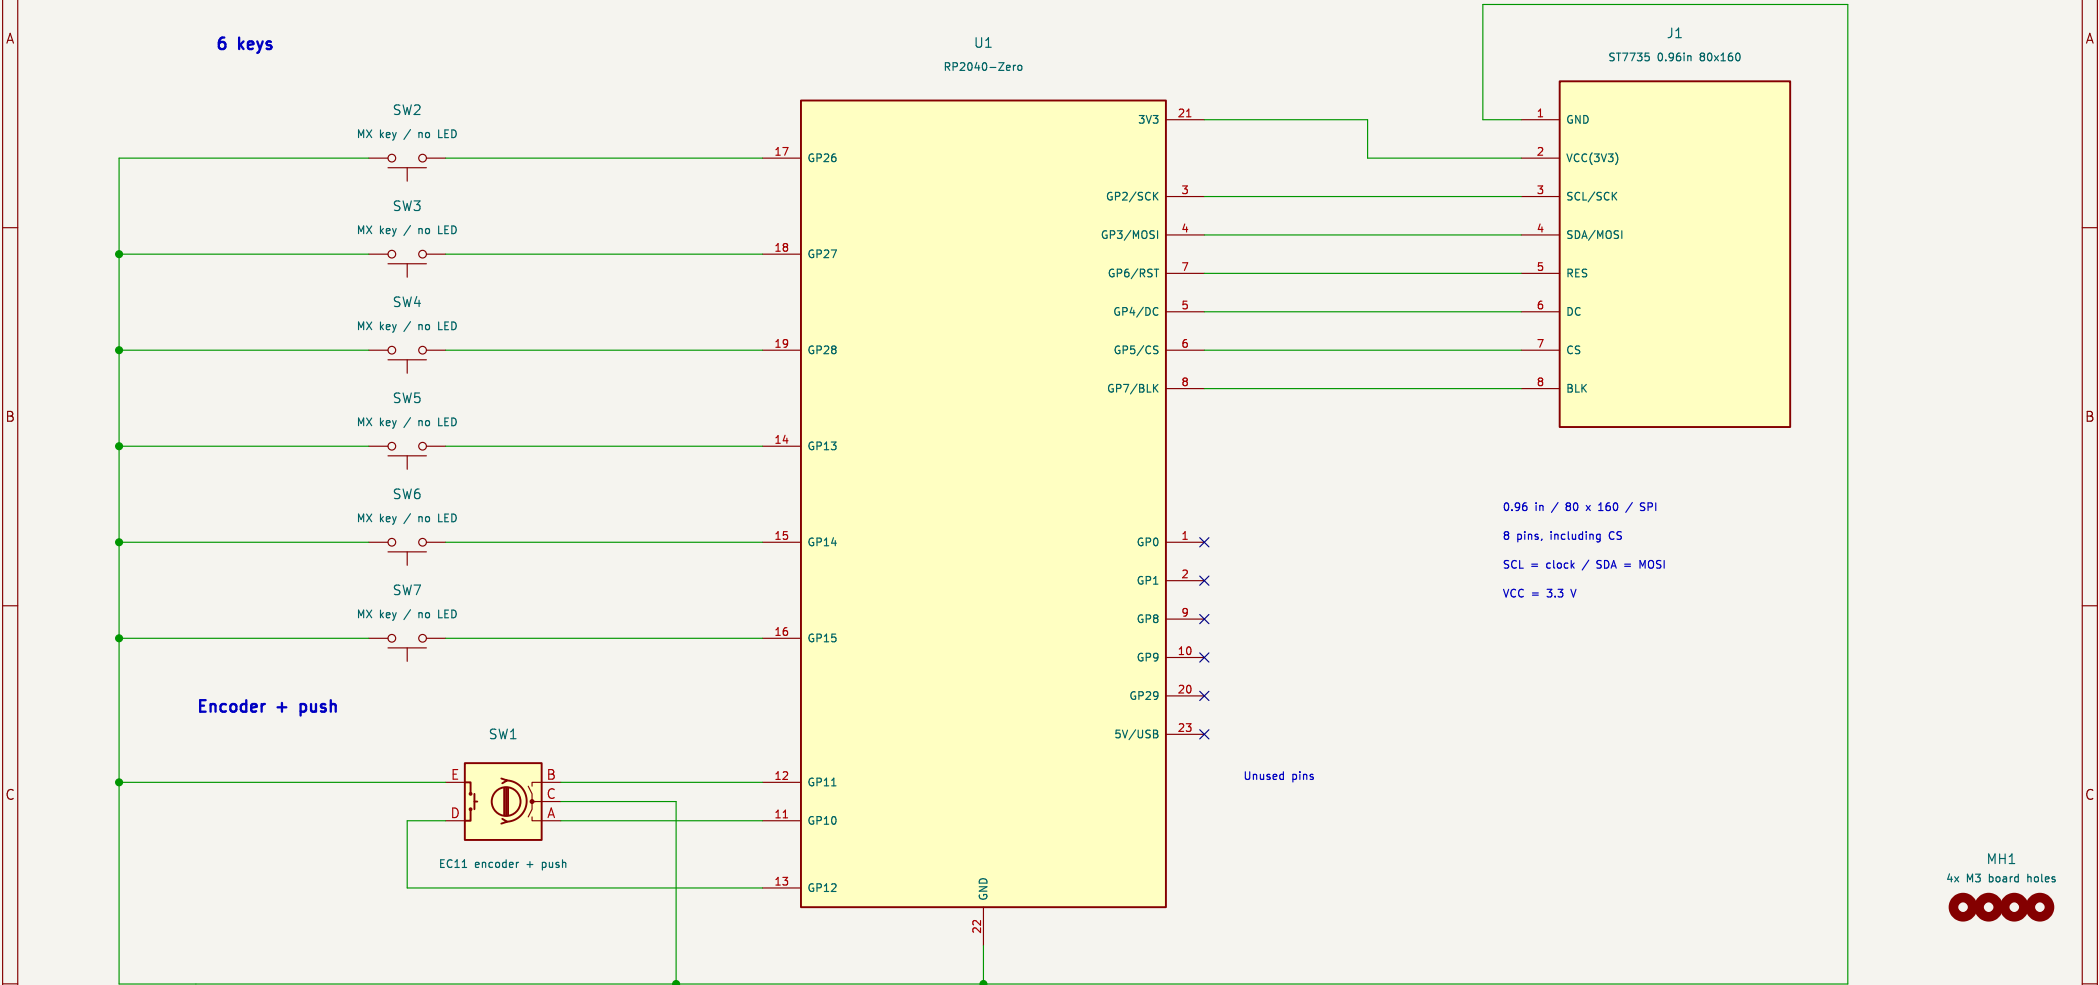

Common GND – continuous wire to every component

Dots mark connected junctions. Crossings without dots are not connected.

USB–C power enters through the RP2040–Zero module.

Keys / encoder: enable GPIO pull–ups; implement debounce.

Numbers beside pins = PCB pad numbers, not GPIO numbers.

Rev8 PCB: no board–only component footprints; LCD body and four M2 holes are one J1 footprint.

U1 uses 2.54 mm through–hole pin headers
USB powered / LCD 3.3 V
One schematic part = one PCB footprint
Hand–solder kit

Sheet: /
File: SayoBot_03C_RP2040_6Key.kicad_sch

Title: SayoBot 03C / RP2040–Zero THT / compact 6 keys

Size: A4

Date: 2026–09–06

Rev: 8

KiCad E.D.A. 9.0.7

Id: 1/1