


JTAG Select



JTAG_SEL(DPSW 2)	接続先
0	PIN Header
1(default)	CPLD

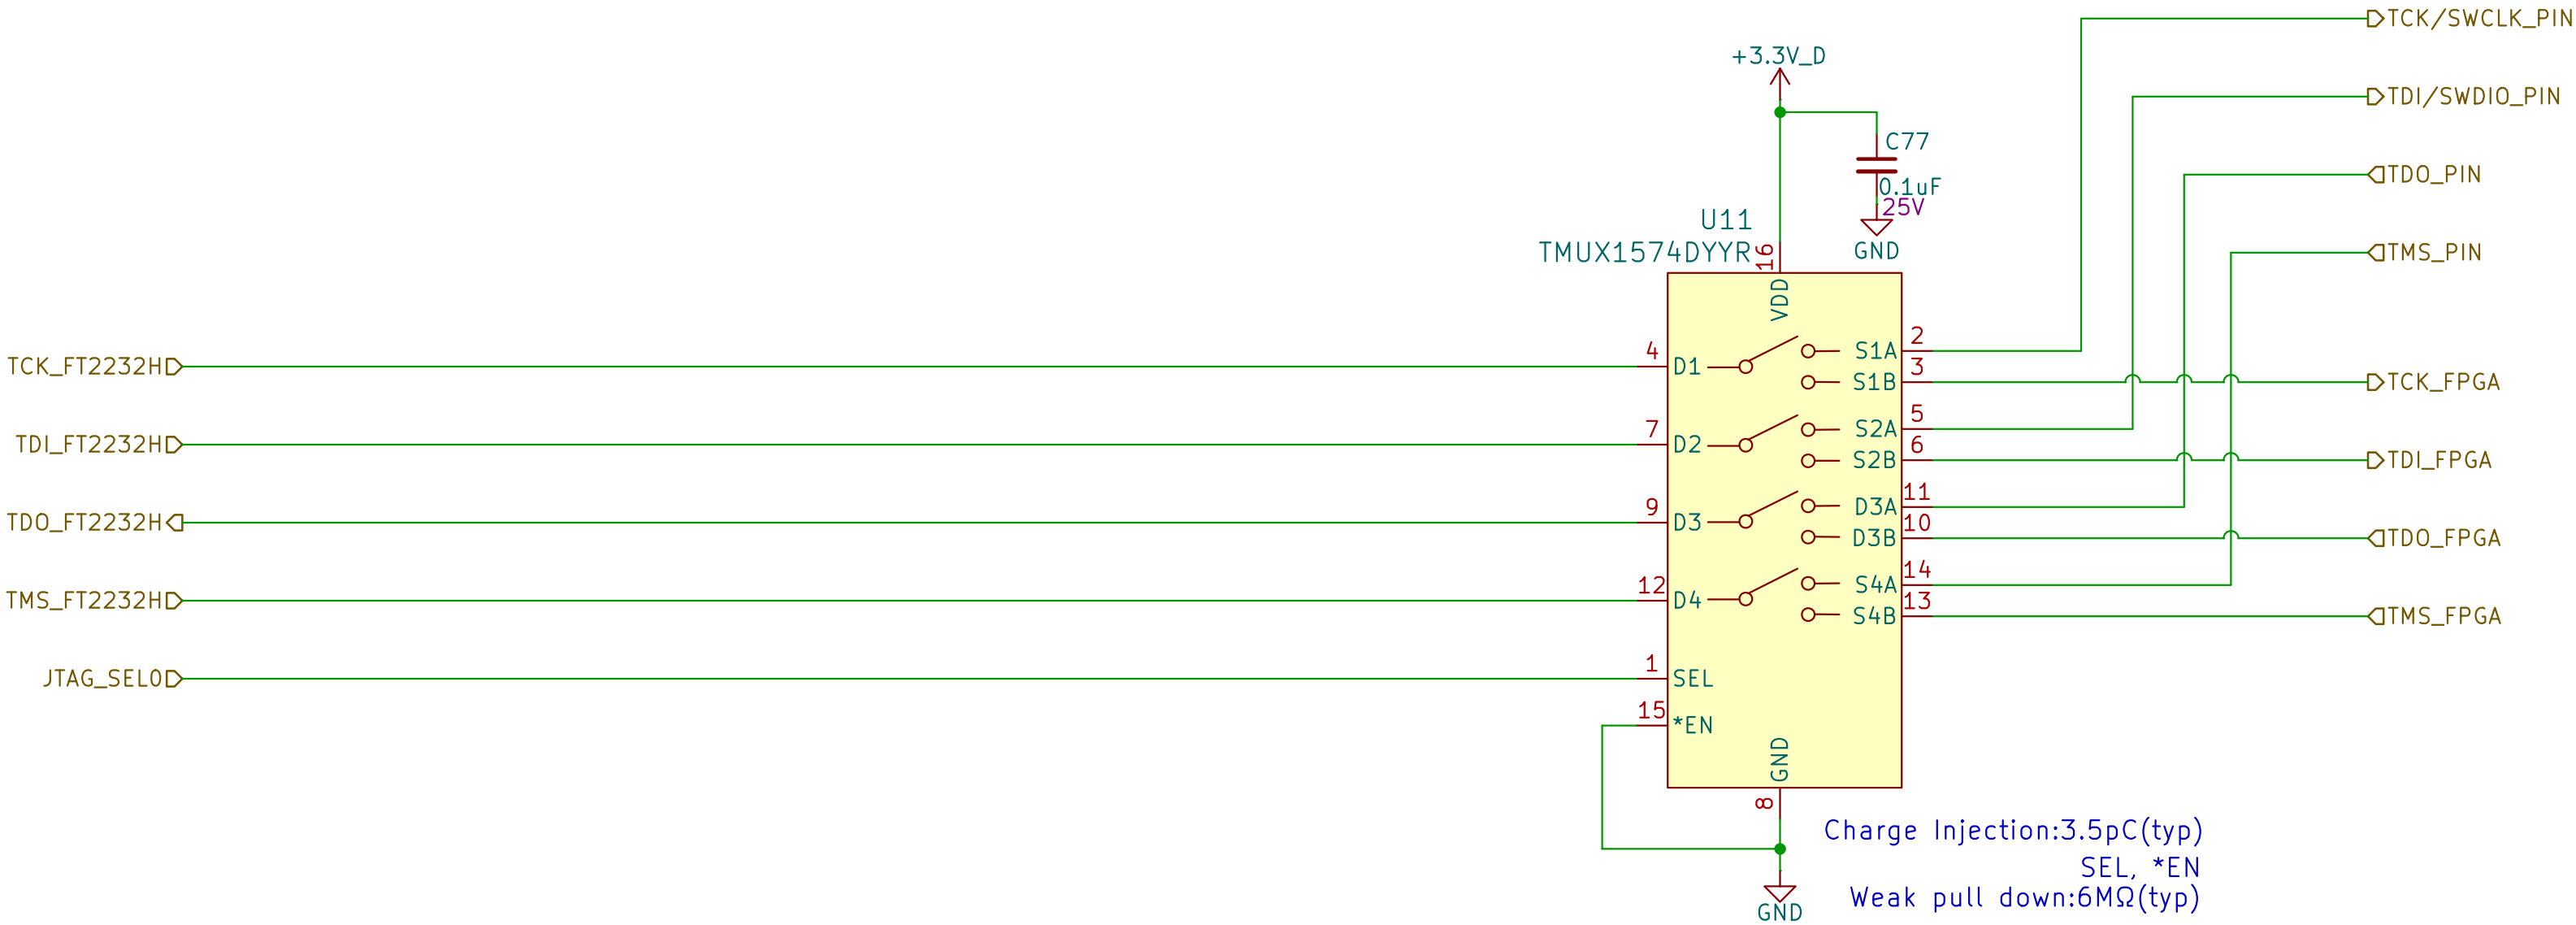