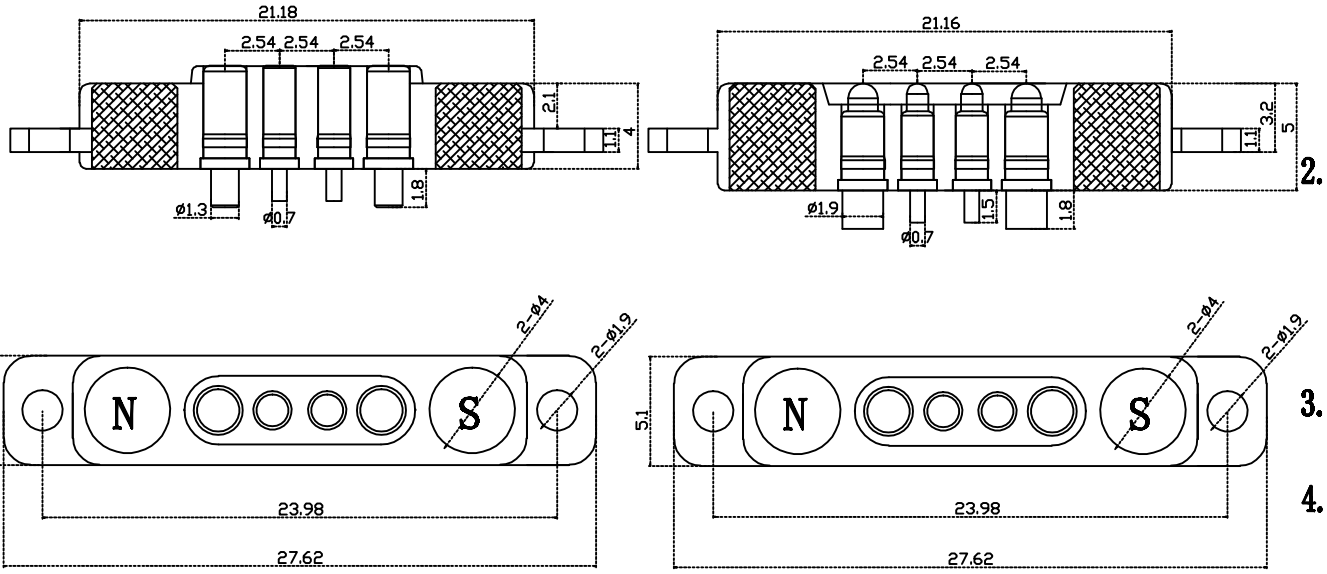


Notes:

1. Material(材质):
   1) Body:Brass
   2) Plunge:Brass
   3) Spring:Stainless steel wire
2. Plating(电镀):
   1) Body: Gold plating over Nickel plating (Body:镍底镀金3u″)
   2) Plunger:Gold plating over Nickel plating (Plunger:镍底镀金3U″)
3. Mechanical(机械性能)
   1) Durability(寿命): 20000 cycle min
4. Electrical(电性能)
   1) Contact resistance(接触阻抗): 30mohm MAX
   2) Voltage rating(额定电压): 36V DC Max
   3) Current rating(额定电流): 5A/1A
5. Working stoke(工作行程): 1.0
6. Spring(弹力): 60g±20g (with full travel length)
7. Housing/塑胶: PA46
8. Magnetic/磁铁: N52
9. 2*4000GS + 2*4400GS

CZX 创卓鑫	深圳市创卓鑫五金电子有限公司 Shenzhen chuangzhuo Eletronic Co., Ltd						
TITEL 品名	4PIN-2.54PH 凹凸5A 带耳 磁吸公母座			TDLERANCE 公差	DWG NO 图号	CZX-4B2-2.54-e	
DRAW BY 设计	易生	DATE 日期	2025/6/20	.XXX ±0.05 .XX ±0.10 .X ±0.20 X. ±0.50 ∠ ±0.1°	UNIT 单位	mm	
CHKED BY 审核	李生	DATE 日期	2025/6/20		MATERIAL 材质	铜	
APPED BY 核准		DATE 日期			SCALE 比例	1:1	TEXT 版本 01