

REV	DESCRIPTION	DATE
A00	First issue	2024-06-17


Front view

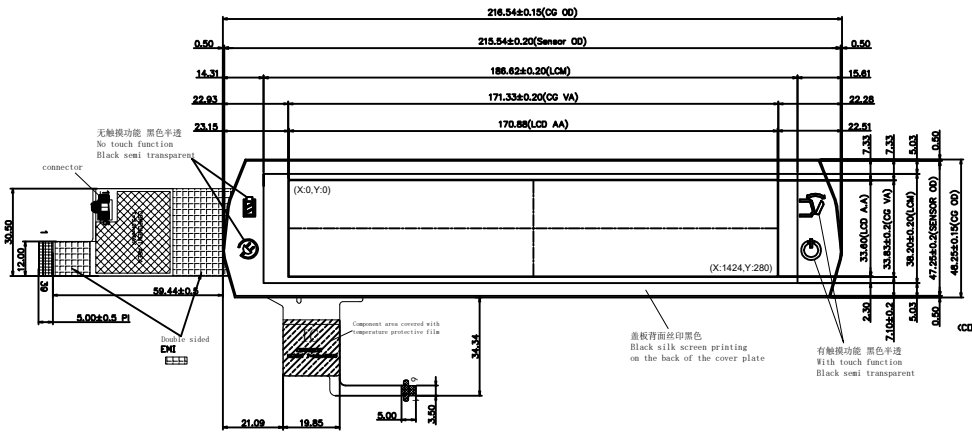


side view

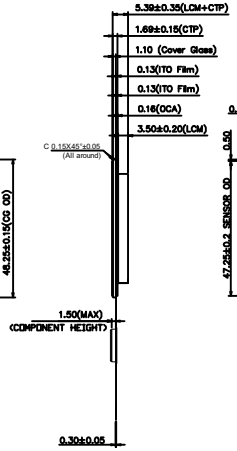

back view

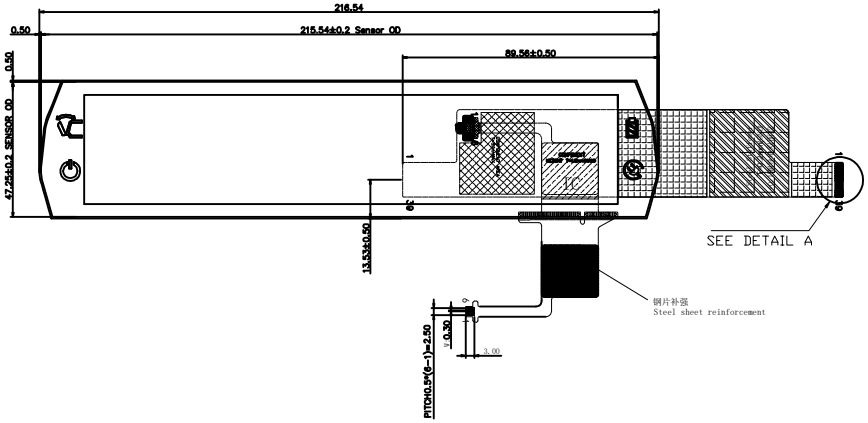




SEE DETAIL A SCALE 5:1

LCM PIN

1	LEDA	21	MIPI DIN
2	LEDA	22	GND
3	LEDK	23	GND
4	LEDK	24	MIPI CKP
5	NC	25	MIPI CKN
6	NC	26	GND
7	VCI	27	GND
8	VCI	28	GND
9	VCI	29	GND
10	VCI	30	VDD
11	GND	31	VDD
12	RESET	32	I2C-SCL
13	TE	33	I2C-SDA
14	GND	34	RST-TP
15	GND	35	INT-TP
16	MIPI DOP	36	GND
17	MIPI DON	37	GND
18	GND	38	NC
19	GND	39	NC
20	MIPI DIP		



BL Driving conditions:IF=40mA,Vf=21.6 - 27.2V

PIN NO	SIGNAL
1	GND
2	SCL3.3V
3	SDA3.3V
4	RST
5	INT
6	VDD 3.3V

LCM NOTES:
1. DISPLAY TYPE: 7 ″ TFT
2. LCD DRIVER IC: OTA7290B
3. OPTIMUM VIEWING ANGLE:ALL
4. LUMINANCE: 500 Cd/M2(TYP)
5. OPERATING TEMP: -20° C~70° C;
   STORAGE TEMP: -30° C~80° C
6. GENERAL TOLERANCE:±0.2MM
7. MARK"*"IS THE IMPORTANT DIMENSION

CTP Technical parameters:
1. LENS+ITO Glass+FPC
   SENSOR:0.48mm LENS:1.1mm
   Lead: FPC (PINCH=0.5mm)Total thickness: 1.69 ± 0.15mm
   IC: ILI2130 I2C
2. Working voltage: 2.8V-3.3 V
3. Response time ≤ 25ms
3. Transmittance: ≥ 85%
4. Surface hardness: 6H
5. Working environment: -20 ℃~+70 ℃, ≤ 90% RH
6. Storage environment: -30 ℃~+80 ℃, ≤ 90% RH
7. Unmarked dimensional tolerance shall be ± 0.2mm

SCALE:	SCALE	DISEN	DISEN ELECTRONICS CO.,LTD
SHEET:			
UNIT: MM			
APP: XSQ	DATE: 2024-06-17	MODEL NO: DS070HSD39T-132	
CHK:	DATE:	PART NO:	
DWN:	DATE:	TITLE:	