
REV	DESCRIPTION	DATE
A00	First issue	2026.09.07
A01	Change TP cable position	2026.09.14

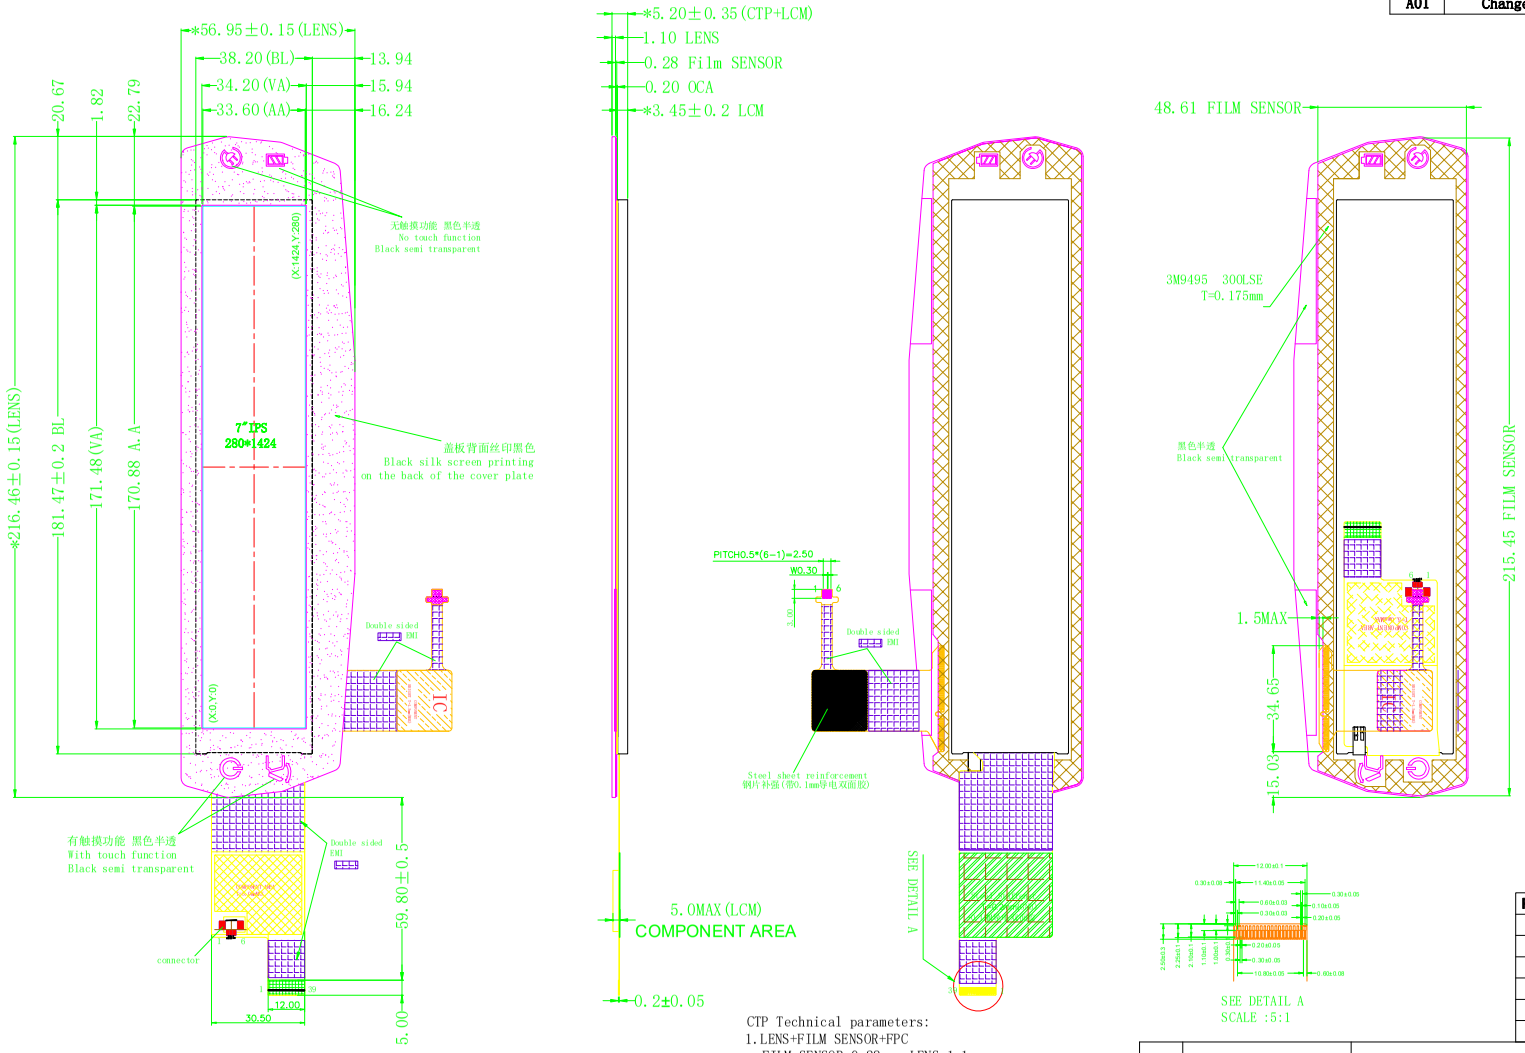


LCM PIN

1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	NC
6	NC
7	VCI
8	VCI
9	VCI
10	VCI
11	GND
12	RESET
13	TE
14	GND
15	GND
16	MIPI DOP
17	MIPI DON
18	GND
19	GND
20	MIPI D1P
21	MIPI D1N
22	GND
23	GND
24	MIPI CKP
25	MIPI CKN
26	GND
27	GND
28	GND
29	GND
30	VDD
31	VDD
32	I2C-SCL
33	I2C-SDA
34	RST-TP
35	INT-TP
36	GND
37	GND
38	NC
39	NC

PIN NO	SIGNAL
1	GND
2	SCL3.3V
3	SDA3.3V
4	RST
5	INT
6	VDD 3.3V

LCM NOTES:
1. DISPLAY TYPE: 7 ″ TFT, BOE 280*1424
2. LCD DRIVER IC: JD9365DA-H3
3. OPTIMUM VIEWING ANGLE:ALL
4. LUMINANCE: 450 Cd/M2(TYP)
5. OPERATING TEMP: -20° C~70° C;
   STORAGE TEMP: -30° C~80° C
6. GENERAL TOLERANCE:±0.2MM
7. MARK"*"IS THE IMPORTANT DIMENSION



VF=12V IF=40mA

背光电路图(CIRCUIT DIAGRAM)

CTP Technical parameters:
1. LENS+FILM SENSOR+FPC
   FILM SENSOR:0.28mm LENS:1.1mm
   Lead: FPC (PINCH=0.5mm)Total
   thickness: 1.69 ± 0.15mm
   IC: GT911 I2C
2. Working voltage: 2.8V-3.3 V
3. Response time ≤ 25ms
3. Transmittance: ≥ 85%
4. Surface hardness: 6H
5. Working environment: -20 ℃~+70 ℃, ≤ 90% RH
6. Storage environment: -30 ℃~+80 ℃, ≤ 90% RH
7. Unmarked dimensional tolerance shall be ± 0.2mm

SCALE:	SCALE	DISEN	DISEN ELECTRONICS CO.,LTD
SHEET:	1:1		
UNIT: MM			
APP:	DATE:	MODEL NO:	DS0700BOE1A39C0-0180A
CHK: Sally	DATE: 2026.09.07	PART NO:	
DWN: Onway	DATE: 2026.09.07		