

1. Description

1.1. Project

Project Name	SI4463
Board Name	SI4463
Generated with:	STM32CubeMX 4.11.0
Date	10/31/2015

1.2. MCU


MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
3	PC14/OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15/OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0/OSC_IN	I/O	RCC_OSC_IN	
6	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
14	PA0 *	I/O	GPIO_Input	GPIO0
15	PA1 *	I/O	GPIO_Input	GPIO1
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
20	PA4 *	I/O	GPIO_Output	SPI_CSN
21	PA5	I/O	SPI1_SCK	
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
24	PC4	I/O	GPIO_EXTI4	
31	VSS	Power		
32	VDD	Power		
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDDUSB	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
58	PB6 *	I/O	GPIO_Output	SDN
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

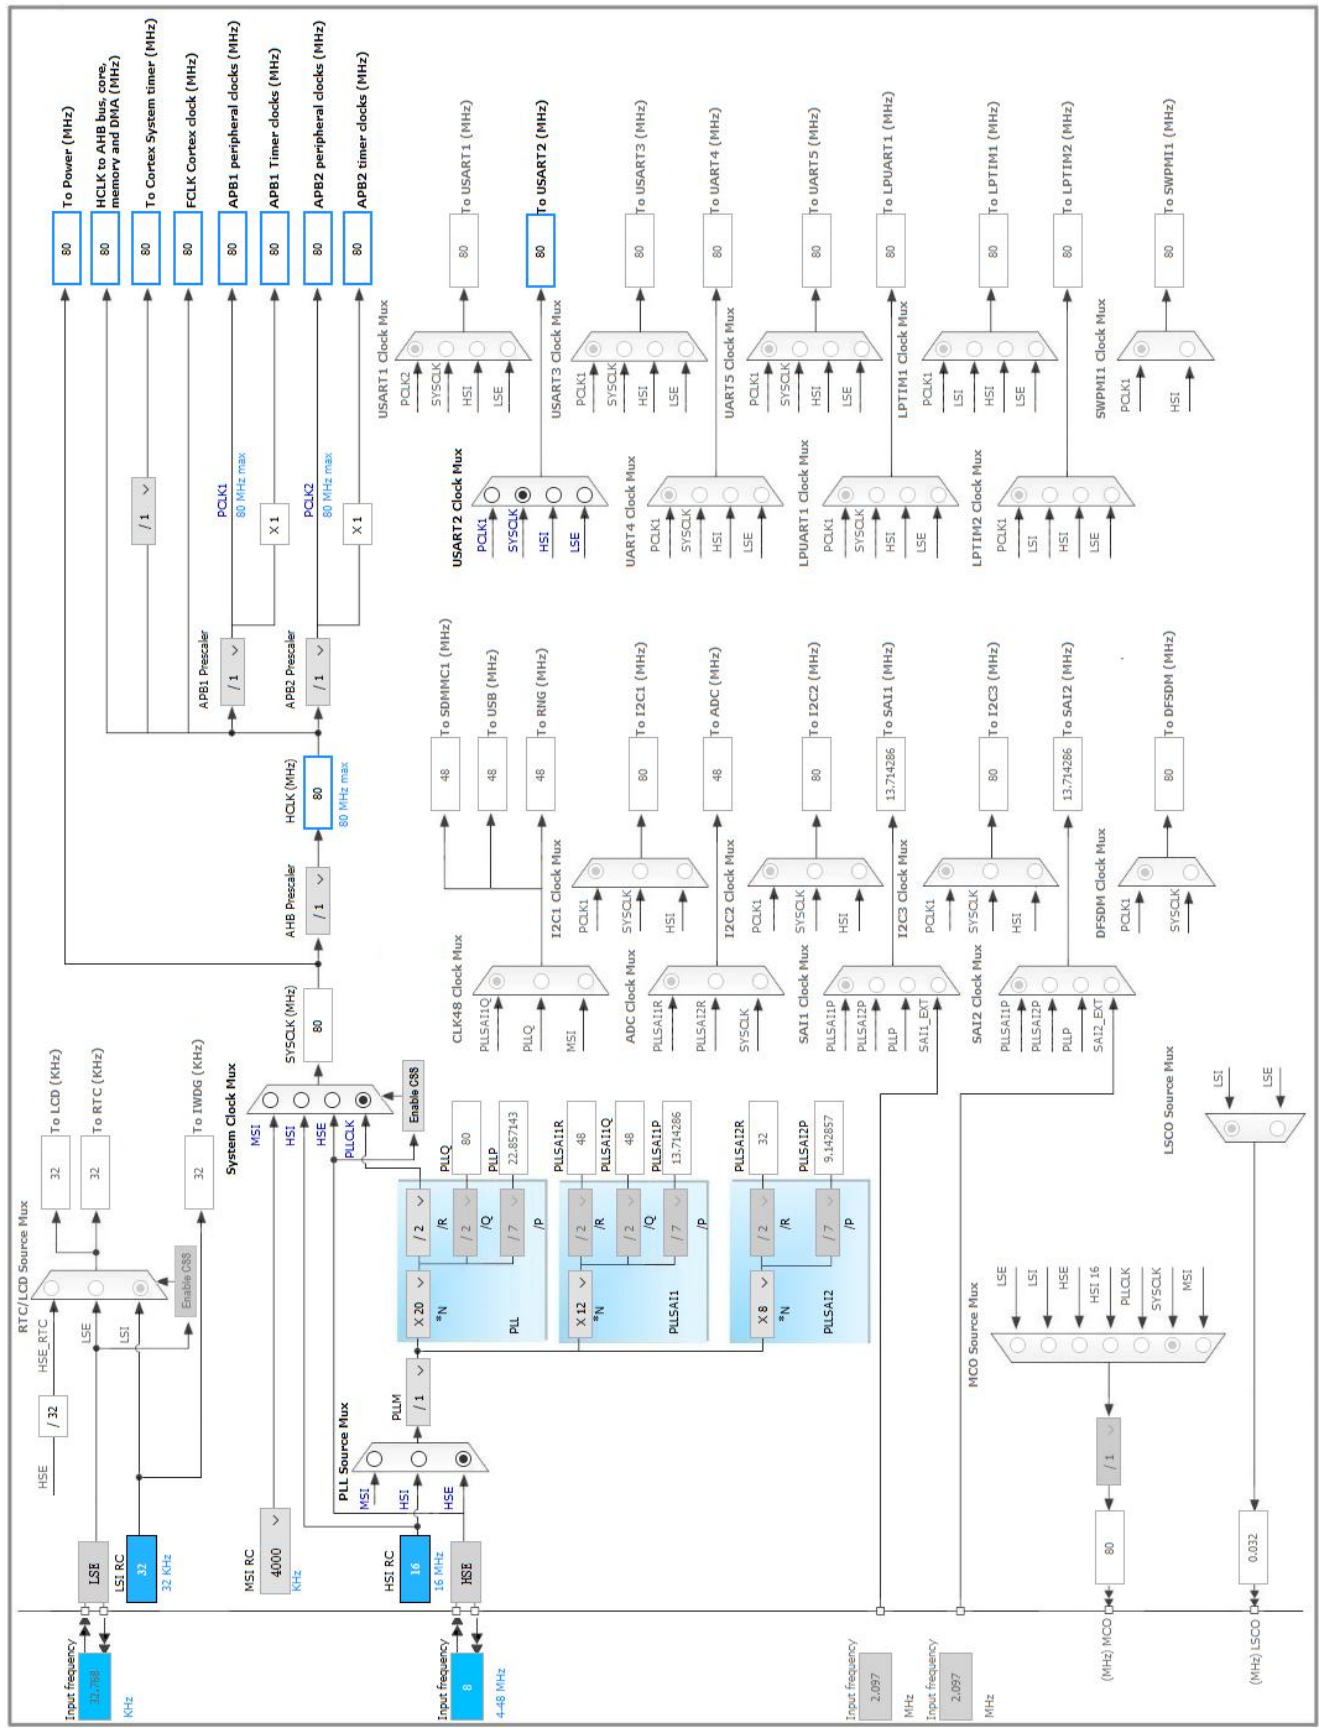

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.2. SPI1

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	40.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Disabled *
NSS Signal Type	Software

5.3. SYS

Debug: Serial Wire Debug (SWD)

5.4. USART2

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14/OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15/OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	Pull-up *	High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	Pull-up *	High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	Pull-up *	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	High *	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	High *	
GPIO	PA0	GPIO_Input	Input mode	Pull-up *	n/a	GPIO0
	PA1	GPIO_Input	Input mode	Pull-up *	n/a	GPIO1
	PA4	GPIO_Output	Output Push Pull	Pull-up *	High *	SPI_CSN
	PC4	GPIO_EXTI4	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	
	PB6	GPIO_Output	Output Push Pull	Pull-up *	High *	SDN

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
System tick timer	true	0	0
EXTI line4 interrupt	true	1	1
Non maskable interrupt	unused		
Memory management fault	unused		
Prefetch fault, memory access fault	unused		
Undefined instruction or illegal state	unused		
Debug monitor	unused		
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt	unused		

* User modified value

7. Power Plugin report

7.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	025976_Rev3

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	SI4463
Project Folder	I:\STMicroelectronics\WORK\STM32L476\SI4463
Toolchain / IDE	EWARM
Firmware Package Name and Version	STM32Cube FW_L4 V1.1.1

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No