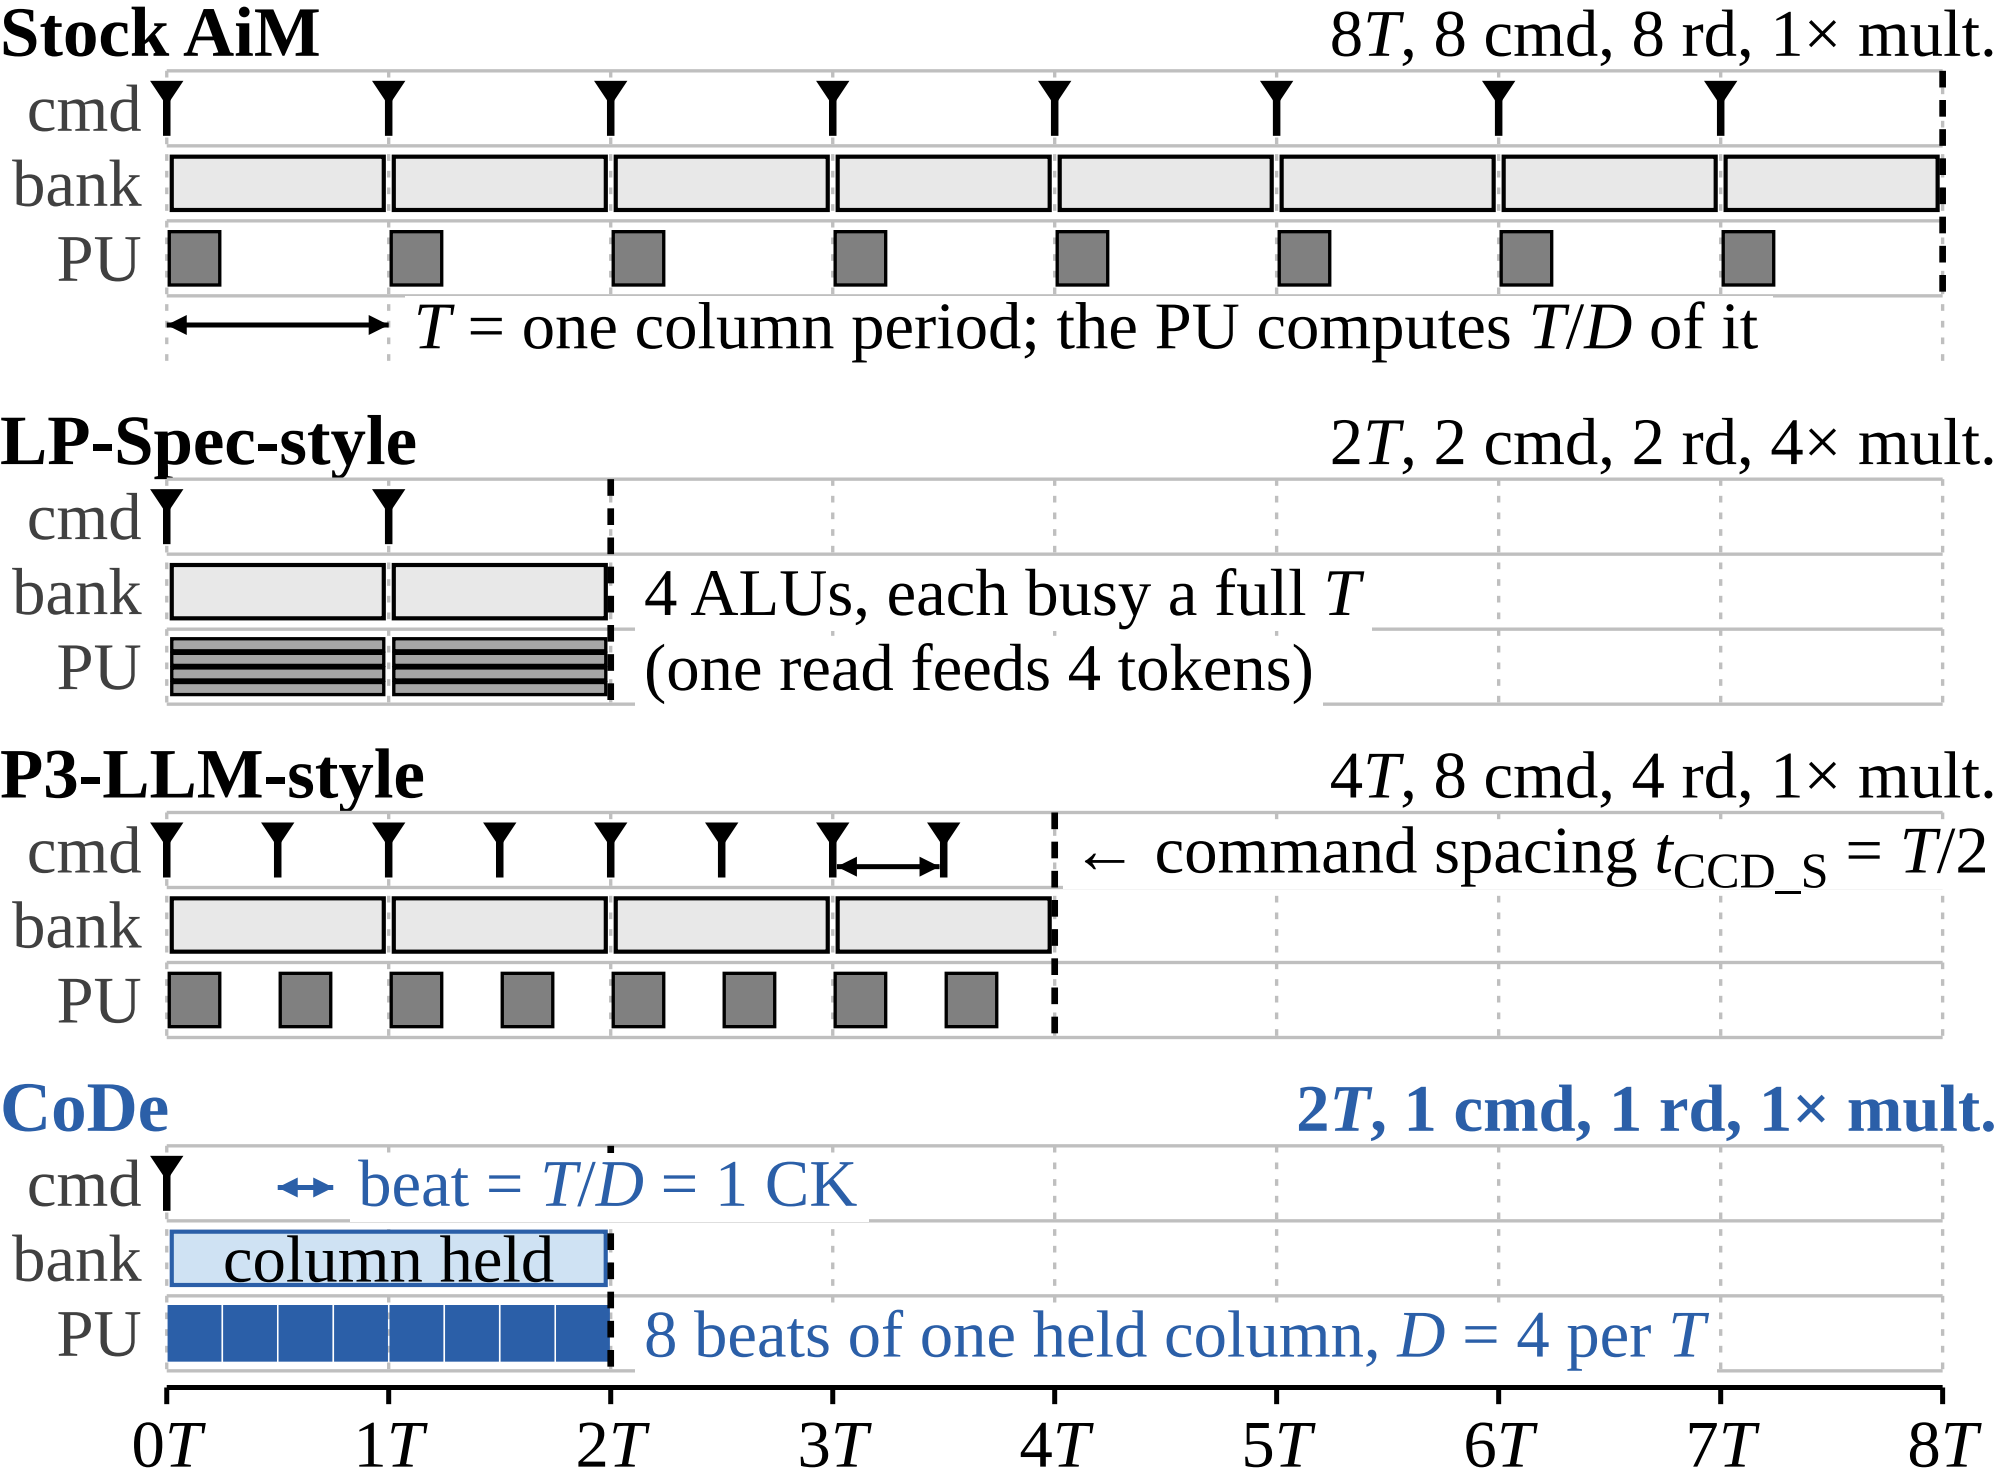
Stock AiM
8T, 8 cmd, 8 rd, 1× mult.
cmd
bank
PU
T = one column period; the PU computes T/D of it
LP-Spec-style
2T, 2 cmd, 2 rd, 4× mult.
cmd
bank
PU
4 ALUs, each busy a full T
(one read feeds 4 tokens)
P3-LLM-style
4T, 8 cmd, 4 rd, 1× mult.
cmd
bank
PU
← command spacing t_{CCD_S} = T/2
CoDe
2T, 1 cmd, 1 rd, 1× mult.
cmd
beat = T/D = 1 CK
bank
column held
PU
8 beats of one held column, D = 4 per T
0T
1T
2T
3T
4T
5T
6T
7T
8T