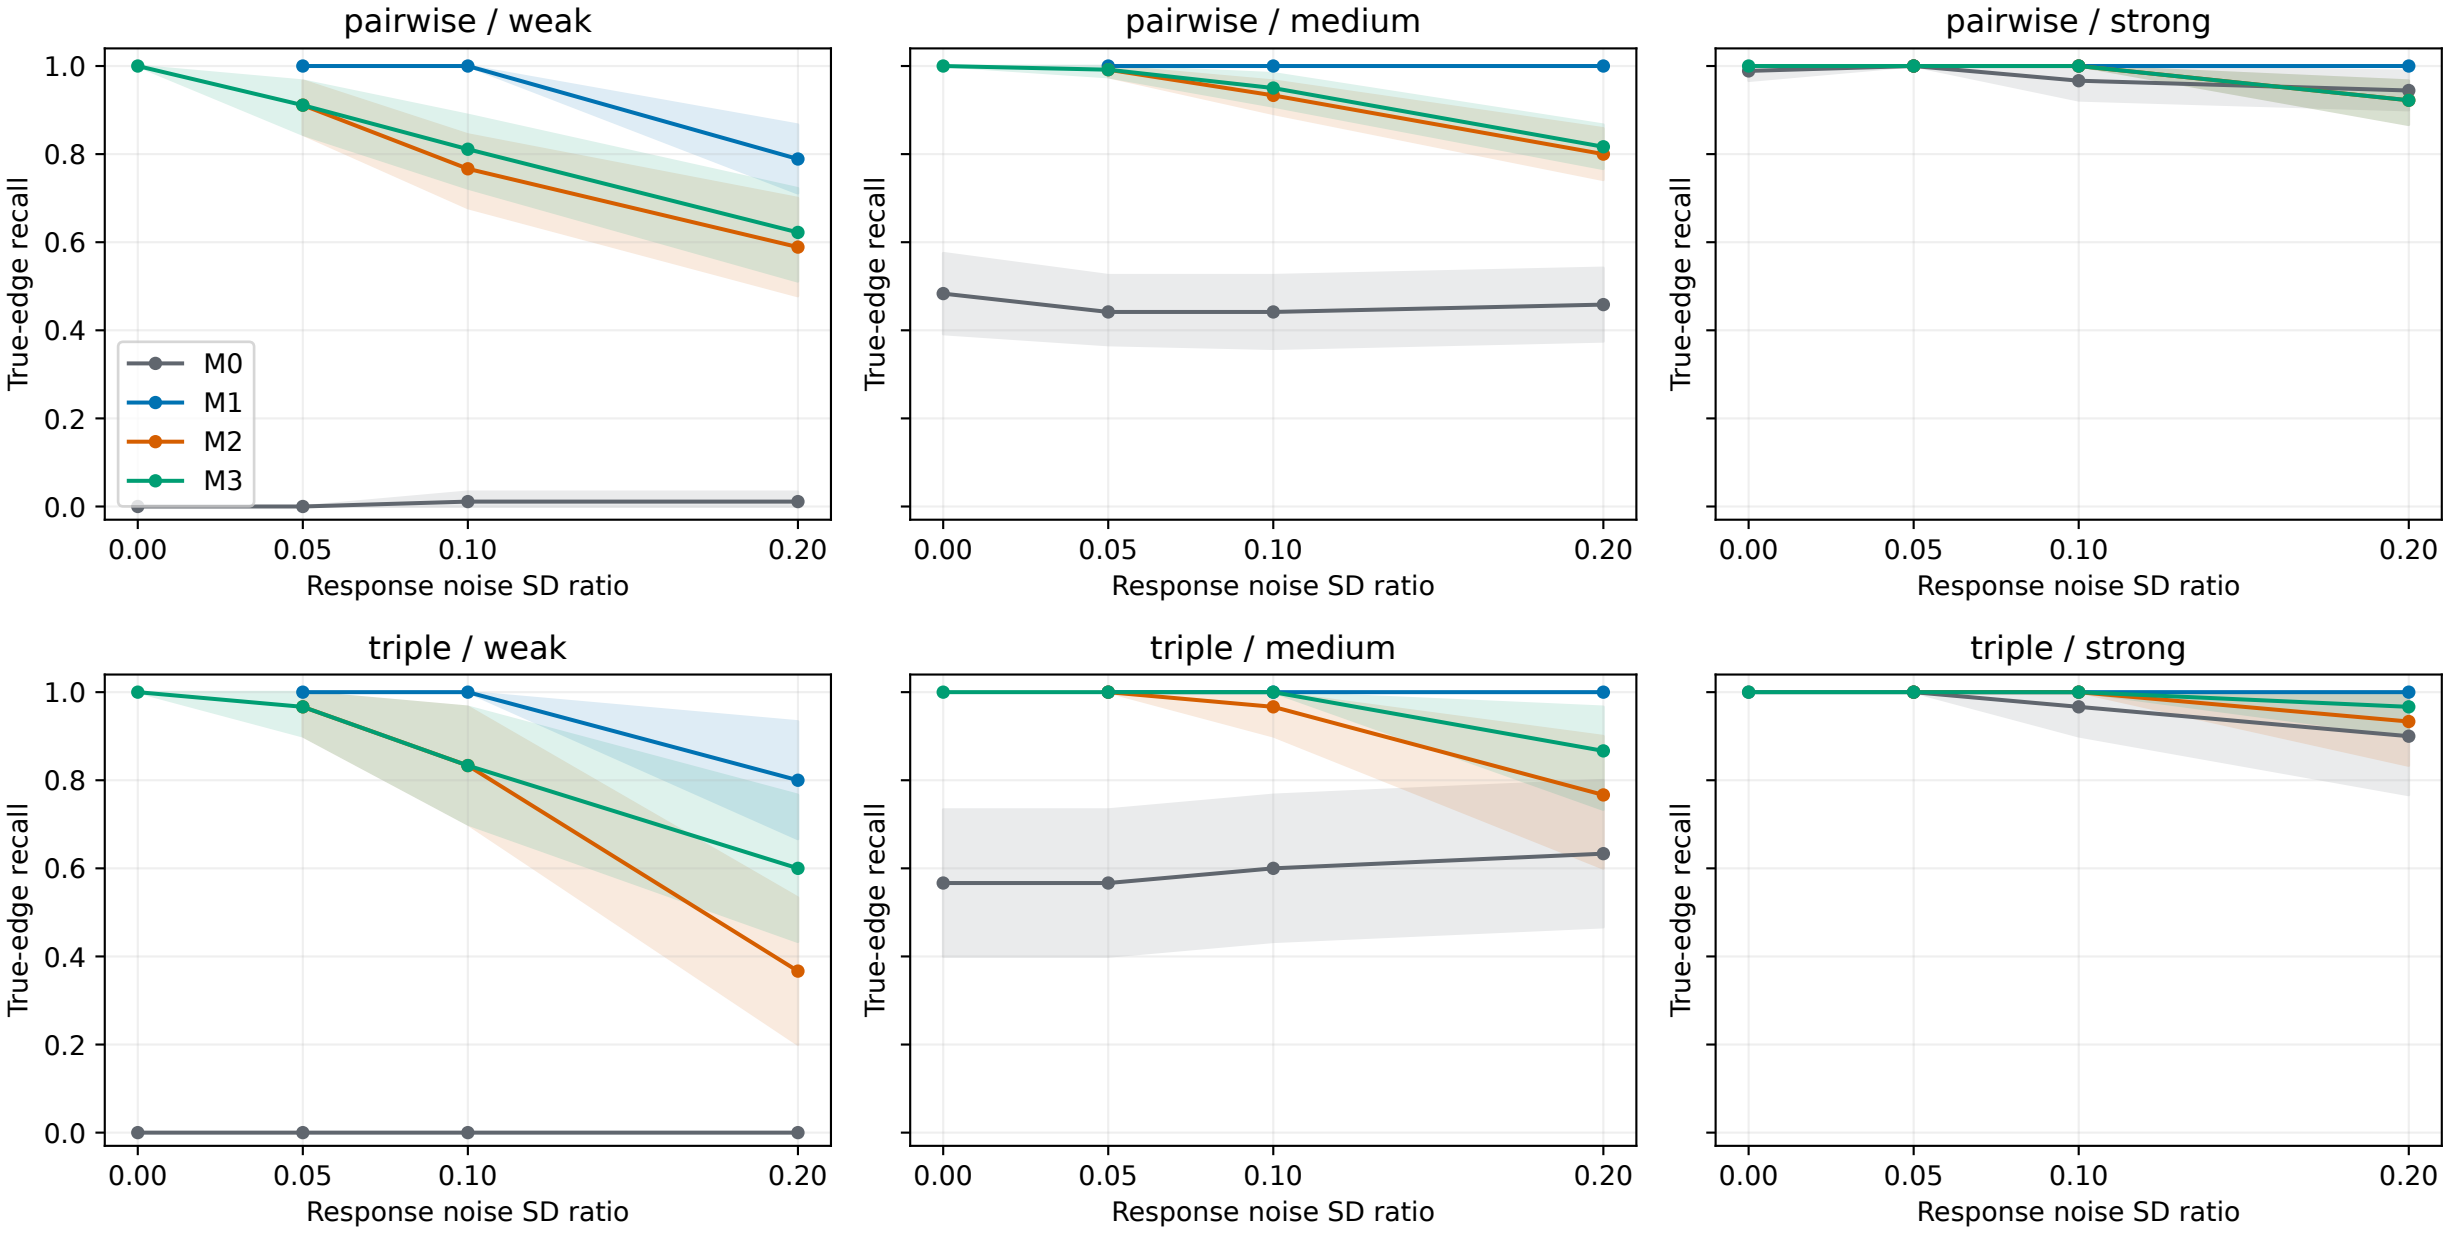
Recall by preregistered TRUE physical strength; pointwise 95% intervals
pairwise / weak
pairwise / medium
pairwise / strong
triple / weak
triple / medium
triple / strong
True-edge recall
Response noise SD ratio
0.00
0.05
0.10
0.20
0.0
0.2
0.4
0.6
0.8
1.0
M0
M1
M2
M3