



Delphi Series Q36SR, Quarter Brick 204W DC/DC Power Modules: 18V~75Vin,12V, 17Aout

The Delphi Series Q36SR, Quarter Brick, 18V~75Vin input, single output, isolated DC/DC converters, are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions. Typical efficiency of the 12V/17A module is greater than 93%.

FEATURES

- High efficiency: 93% @ 12V/17A
- Size:

58.4x36.8x11.7mm

(2.30"x1.45"x0.46") w/o heat-spreader

58.4x36.8x12.7mm

(2.30"x1.45"x0.50") with heat-spreader

- Industry standard footprint and pin out
- Fixed frequency operation
- Input UVLO
- OTP and OVP
- Output OCP hiccup mode
- Output voltage trim down: -10%
- Output voltage trim up: +10% at Vin>20V
- Monotonic startup into normal and pre-biased loads
- 1500V/3000V isolation and basic insulation
- No minimum load required
- No negative current during power or enable on/off
- ISO 9001, TL 9000, ISO 14001, QS 9000,
 OHSAS18001 certified manufacturing facility
- UL/cUL 60950-1 (US & Canada)

OPTIONS

- Negative or positive logic remote On/Off
- Through hole with heat-spreader

APPLICATIONS

- Optical Transport
- Data Networking
- Communications
- Servers



TECHNICAL SPECIFICATIONS


(T_A =25°C, airflow rate=300 LFM, V_{in} =48Vdc, nominal Vout unless otherwise noted.)

PARAMETER	NOTES and CONDITIONS	Q36SR12017(Standard)				
		Min.	Тур.	Max.	<u> </u>	
ABSOLUTE MAXIMUM RATINGS						
Input Voltage Continuous		0		80	Vdc Vdc	
Transient (100ms)	100ms	U		100	Vdc	
Operating Ambient Temperature	1001110	-40		85	°C	
Storage Temperature		-55		125	°C	
Input/Output Isolation Voltage				1500	Vdc	
Input/Output Isolation Voltage	For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page)			3000	Vdc	
NPUT CHARACTERISTICS	ì	40	40	7.5	1//	
Operating Input Voltage Input Under-Voltage Lockout		18	48	75	Vdc	
Turn-On Voltage Threshold		16	17	18	Vdc	
Turn-Off Voltage Threshold		15	16	17	Vdc	
Lockout Hysteresis Voltage		0.3	1	1.8	Vdc	
Maximum Input Current	100% Load, 18Vin		400	15	A	
No-Load Input Current Off Converter Input Current	Vin=48V,lo=0A Vin=48V		100 10		mA mA	
Inrush Current (I ² t)	VII I=40 V		10	1	A ² s	
Input Reflected-Ripple Current	P-P thru 12µH inductor, 5Hz to 20MHz		20	•	mA	
Input Voltage Ripple Rejection	120 Hz		50		dB	
DUTPUT CHARACTERISTICS						
Output Voltage Set Point	Vin=48V, Io=Io.max, Tc=25°C	11.82	12.00	12.18	Vdc	
Output Voltage Regulation Over Load	lo=lo, min to lo, max		±3	±15	mV	
Over Line	Vin=18V to 75V		±3	±15	mV	
Over Temperature	Tc=-40°C to 110°C		±120	110	mV	
Total Output Voltage Range	Over sample load, line and temperature	11.64	12.00	12.36	V	
Output Voltage Ripple and Noise	5Hz to 20MHz bandwidth					
Peak-to-Peak	Full Load, 1µF ceramic, 10µF tantalum		100		mV	
RMS Operating Output Current Range	Full Load, 1µF ceramic, 10µF tantalum Vin=18V to75V	0		17	mV A	
Operating Output Current Range	VIII=10V t075V	U		17	A	
Output Over Current Protection(hiccup model)	Output Voltage 10% Low	110		140	%	
DYNAMIC CHARACTERISTICS Output Voltage Current Transient	Vin=48V, 10µF Tan & 1µF Ceramic load cap, 0.1A/µs					
Positive Step Change in Output Current	75% lo.max to 50% lo.max		400		mV	
Negative Step Change in Output Current	50% lo.max to 75% lo.max		400		mV	
Settling Time (within 1% Vout nominal)			200		μs	
Turn-On Transient						
Start-Up Time, From On/Off Control Start-Up Time, From Input			28		mS mS	
		0	28	5000	mS µF	
	Full load: 5% overshoot of Vout at startun				μι	
Output Capacitance (note1)	Full load; 5% overshoot of Vout at startup	-		3000		
Output Capacitance (note1)	Full load; 5% overshoot of Vout at startup Vin=24V		93.5	5000	%	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load	Vin=24V Vin=48V		93.0	3000	%	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load	Vin=24V			5000		
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS	Vin=24V Vin=48V		93.0		% %	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output	Vin=24V Vin=48V Vin=48V		93.0	1500	% % Vdc	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS	Vin=24V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY		93.0		% %	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Isolation Resistance	Vin=24V Vin=48V Vin=48V	10	93.0 92.0	1500	% % Vdc	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance	Vin=24V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY		93.0	1500	% % Vdc Vdc	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS	Vin=24V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY		93.0 92.0	1500	% % Vdc Vdc MΩ pF	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency	Vin=24V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY		93.0 92.0	1500	% % Vdc Vdc	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS	Vin=24V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY		93.0 92.0	1500	% % Vdc Vdc MΩ pF	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ONOFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off)	Vin=24V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page)		93.0 92.0	1500	% % Vdc Vdc MΩ pF	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 100% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off	10	93.0 92.0	1500 3000 0.8 5	% Vdc Vdc MΩ pF KHz	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off)	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off	10	93.0 92.0	1500 3000 0.8 5	% % Vdc Vdc MΩ pF KHz	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 80% Load SOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic Low (Module Off) Logic High (Module Off)	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Von/off Von/off	10	93.0 92.0	1500 3000 0.8 5	% % Vdc Vdc MΩ pF KHz V	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic High (Module Off) Logic High (Module Off) ON/OFF Current (for both remote on/off logic)	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=0.0V	10	93.0 92.0	1500 3000 0.8 5	% % Vdc Vdc MΩ pF KHz	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic High (Module Off) Logic High (Module On) ON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic)	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=0.0V Logic High, Von/off=5V	2.4	93.0 92.0	1500 3000 0.8 5 0.8 5	% % Vdc Vdc MΩ pF KHz V V	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 100% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic High (Module Off) ON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2)	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=0.0V Logic High, Von/off=5V Pout ≤ max rated power,lo ≤ lo.max	10	93.0 92.0	0.8 5 0.8 1	% % Vdc Vdc MΩ pF KHz V V	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 100% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic High (Module On) ON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2) Output Voltage Remote Sense Range	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=0.0V Logic High, Von/off=5V Pout ≤ max rated power,lo ≤ lo.max Pout ≤ max rated power,lo ≤ lo.max	10 2.4 2.4	93.0 92.0	0.8 5 0.8 1	% % Vdc Vdc MΩ pF KHz V V V % %	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic High (Module Off) Logic High (Module On) ON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2) Output Voltage Remote Sense Range Output Over-Voltage Protection	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=0.0V Logic High, Von/off=5V Pout ≤ max rated power,lo ≤ lo.max	2.4	93.0 92.0	0.8 5 0.8 1	% Vdc Vdc MΩ pF KHz V V	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 100% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic Ligh (Module Off) ON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2) Output Voltage Remote Sense Range Output Over-Voltage Protection GENERAL SPECIFICATIONS	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=5V Pout ≤ max rated power,lo ≤ lo.max Pout ≤ max rated power,lo ≤ lo.max Over full temp range; % of nominal Vout	10 2.4 2.4	93.0 92.0 1000 260	0.8 5 0.8 10	% % Vdc Vdc MΩ pF KHz V V % %	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic High (Module Off) Logic High (Module On) CON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2) Output Voltage Remote Sense Range Output Over-Voltage Protection GENERAL SPECIFICATIONS MTBF	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=5V Pout ≦ max rated power,lo ≦ lo.max Pout ≦ max rated power,lo ≦ lo.max Over full temp range; % of nominal Vout lo=80% of lo, max; Ta=25°C, normal input,600FLM	10 2.4 2.4	93.0 92.0 1000 260	0.8 5 0.8 10	% % Vdc Vdc MΩ pF KHz V V MA Mhours	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 100% Load SOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic High (Module Off) ON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Remote Sense Range Output Voltage Remote Sense Range Output Over-Voltage Protection GENERAL SPECIFICATIONS MTBF Weight	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Ion/off at Von/off=5V Pout ≤ max rated power,lo ≤ lo.max Pout ≤ max rated power,lo ≤ lo.max Over full temp range; % of nominal Vout Io=80% of lo, max; Ta=25°C, normal input,600FLM Without heat spreader	10 2.4 2.4	93.0 92.0 1000 260 3.0 45.5	0.8 5 0.8 10	% % Vdc Vdc MΩ pF KHz V V MA Mhours grams	
Output Capacitance (note1) EFFICIENCY 100% Load 100% Load 60% Load ISOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Logic High (Module Off) Logic High (Module On) CON/OFF Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2) Output Voltage Remote Sense Range Output Over-Voltage Protection GENERAL SPECIFICATIONS MTBF	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Von/off Ion/off at Von/off=5V Pout ≦ max rated power,lo ≦ lo.max Pout ≦ max rated power,lo ≦ lo.max Over full temp range; % of nominal Vout lo=80% of lo, max; Ta=25°C, normal input,600FLM	10 2.4 2.4	93.0 92.0 1000 260	0.8 5 0.8 10	% % Vdc Vdc MΩ pF KHz V V MA Mhours	
Output Capacitance (note1) EFFICIENCY 100% Load 60% Load SOLATION CHARACTERISTICS Input to Output Input to Output Isolation Resistance Isolation Capacitance FEATURE CHARACTERISTICS Switching Frequency ON/OFF Control, Negative Remote On/Off logic Logic Low (Module On) Logic High (Module Off) ON/OFF Control, Positive Remote On/Off logic Logic Low (Module Off) Conyoff Control, Positive Remote On/Off logic Logic High (Module Off) Conyoff Current (for both remote on/off logic) Leakage Current (for both remote on/off logic) Output Voltage Trim Range(note 2) Output Voltage Protection GENERAL SPECIFICATIONS MTBF Weight	Vin=24V Vin=48V Vin=48V Vin=48V For Q36SR12017xxxZ and Q36SR12017xxxY (refer to the last page) Von/off Von/off Von/off Ion/off at Von/off=0.0V Logic High, Von/off=5V Pout ≦ max rated power,lo ≦ lo.max Pout ≦ max rated power,lo ≦ lo.max Over full temp range; % of nominal Vout lo=80% of lo, max; Ta=25°C, normal input,600FLM Without heat spreader With heat spreader	10 2.4 2.4	93.0 92.0 1000 260 3.0 45.5 61.1	0.8 5 0.8 10	% % Vdc Vdc MΩ pF KHz V V MA % Mhours grams grams	

Note1: For applications with higher output capacitive load, please contact Delta

Note2: Trim down range -10% for 18Vin ~75Vin, Trim up range +10% for 20Vin ~ 75Vin.

ELECTRICAL CHARACTERISTICS CURVES

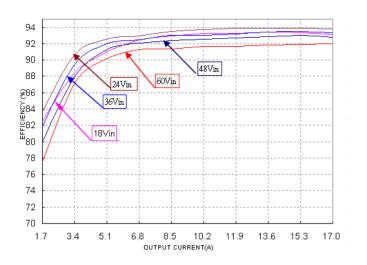

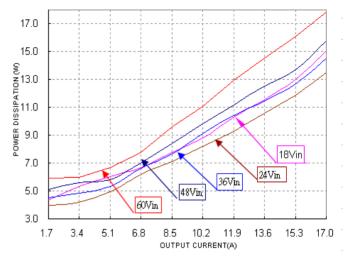


Figure 1: Efficiency vs. load current for minimum, nominal, and maximum input voltage at 25°C

Figure 2: Power dissipation vs. load current for minimum, nominal, and maximum input voltage at 25°C.

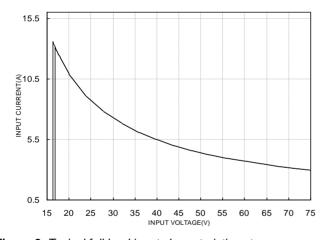


Figure 3: Typical full load input characteristics at room temperature

ELECTRICAL CHARACTERISTICS CURVES

For Negative Remote On/Off Logic

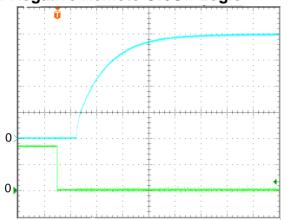


Figure 4: Turn-on transient at full rated load current (resistive load) (10 ms/div). Vin=48V. Top Trace: Vout, 3.0V/div; Bottom Trace: ON/OFF input, 3V/div

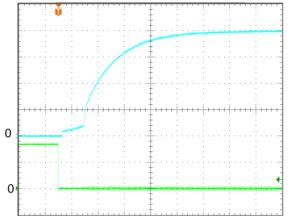


Figure 5: Turn-on transient at zero load current (10 ms/div). Vin=48V. Top Trace: Vout: 3.0V/div, Bottom Trace: ON/OFF input, 3V/div

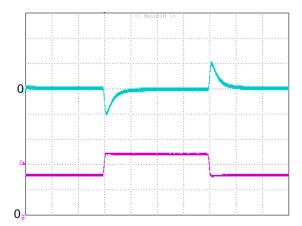


Figure 6: Output voltage response to step-change in load current (50%-75%-50% of lo, max; di/dt = 0.1A/μs; Vin is 24ν). Load cap: 10μF tantalum capacitor and 1μF ceramic capacitor. Top Trace: Vout (0.5V/div, 500us/div), Bottom Trace:lout (5A/div). Scope measurement should be made using a BNC cable (length shorter than 20 inches). Position the load between 51 mm to 76 mm (2 inches to 3 inches) from the module

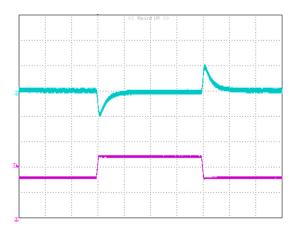


Figure 7: Output voltage response to step-change in load current (50%-75%-50% of lo, max; di/dt = 0.1A/μs; Vin is 48v). Load cap: 10μF tantalum capacitor and 1μF ceramic capacitor. Top Trace: Vout (0.5V/div, 500us/div), Bottom Trace: lout (5A/div). Scope measurement should be made using a BNC cable (length shorter than 20 inches). Position the load between 51 mm to 76 mm (2 inches to 3 inches) from the module

ELECTRICAL CHARACTERISTICS CURVES

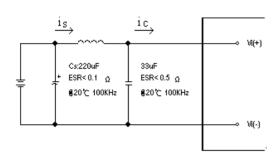


Figure 8: Test set-up diagram showing measurement points for Input Terminal Ripple Current and Input Reflected Ripple Current.

Note: Measured input reflected-ripple current with a simulated source Inductance (L_{TEST}) of 12 μ H. Capacitor Cs offset possible battery impedance. Measure current as shown above

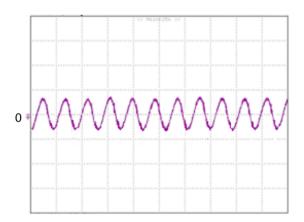


Figure 10: Input reflected ripple current, i_s , through a $12\mu H$ source inductor at nominal input voltage (Vin=48V) and rated load current (20 mA/div, 5us/div)

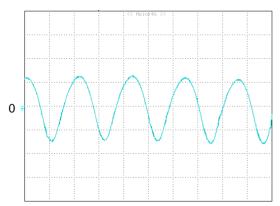


Figure 12: Output voltage ripple at nominal input voltage (Vin=48V) and rated load current (50 mV/div, 2us/div).Load capacitance: 1μF ceramic capacitor and 10μF tantalum capacitor. Bandwidth: 20 MHz. Scope measurements should be made using a BNC cable (length shorter than 20 inches). Position the load between 51 mm to 76 mm (2 inches to 3 inches) from the module

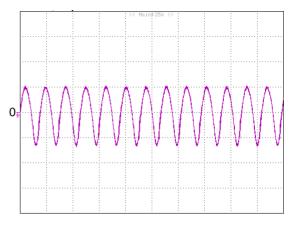


Figure 9: Input Terminal Ripple Current, ic, at full rated output current and nominal input voltage (Vin=48V) with 12μH source impedance and 33μF electrolytic capacitor (1A/div, 5us/div)

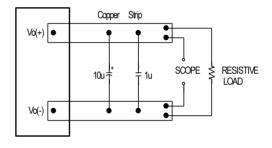


Figure 11: Output voltage noise and ripple measurement test setup

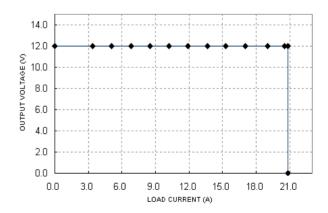


Figure 13: Output voltage vs. load current showing typical current limit curves and converter shutdown points (Vin=48V)

DESIGN CONSIDERATIONS


Input Source Impedance

The impedance of the input source connecting to the DC/DC power modules will interact with the modules and affect the stability. A low ac-impedance input source is recommended. If the source inductance is more than a few $\mu H,$ we advise adding a 100 μF electrolytic capacitor (ESR < 0.7 Ω at 100 kHz) mounted close to the input of the module to improve the stability.


Layout and EMC Considerations

Delta's DC/DC power modules are designed to operate in a wide variety of systems and applications. For design assistance with EMC compliance and related PWB layout issues, please contact Delta's technical support team. An external input filter module is available for easier EMC compliance design. Below is the reference design for an input filter tested with Q36SR12017 to meet class A in CISSPR 22.

Schematic

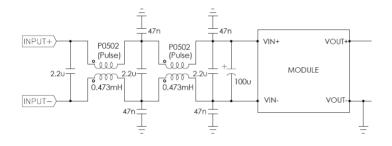

Test result:

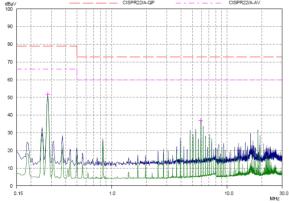

25C, 48Vin, full load, Green line is quasi peak mode and blue line is average mode.

Safety Considerations

The power module must be installed in compliance with the spacing and separation requirements of the end-user's safety agency standard, i.e., UL60950-1,

CSA C22.2 NO. 60950-1 2nd and IEC 60950-1 2nd: 2005 and EN 60950-1 2nd: 2006+A11+A1: 2010,if the system in which the power module is to be used must meet safety agency requirements.

Basic insulation based on 75 Vdc input is provided between the input and output of the module for the purpose of applying insulation requirements when the input to this DC-to-DC converter is identified as TNV-2 or SELV. An additional evaluation is needed if the source is other than TNV-2 or SELV.

When the input source is SELV circuit, the power module meets SELV (safety extra-low voltage) requirements. If the input source is a hazardous voltage which is greater than 60 Vdc and less than or equal to 75 Vdc, for the module's output to meet SELV requirements, all of the following must be met:

- The input source must be insulated from the ac mains by reinforced or double insulation.
- The input terminals of the module are not operator accessible.

When installed into a Class II equipment (without grounding), spacing consideration should be given to the end-use installation, as the spacing between the module and mounting surface have not been evaluated.

The power module has extra-low voltage (ELV) outputs when all inputs are ELV.

This power module is not internally fused. To achieve optimum safety and system protection, an input line fuse is highly recommended. The safety agencies require a Fast-acting fuse with 50A maximum rating to be installed in the ungrounded lead. A lower rated fuse can be used based on the maximum inrush transient energy and maximum input current.

Soldering and Cleaning Considerations

Post solder cleaning is usually the final board assembly process before the board or system undergoes electrical testing. Inadequate cleaning and/or drying may lower the reliability of a power module and severely affect the finished circuit board assembly test. Adequate cleaning and/or drying is especially important for un-encapsulated and/or open frame type power modules. For assistance on appropriate soldering and cleaning procedures, please contact Delta's technical support team.

FEATURES DESCRIPTIONS

Over-Current Protection

The modules include an internal output over-current protection circuit, which will endure current limiting for an unlimited duration during output overload. If the output current exceeds the OCP set point, the modules will automatically shut down, and enter hiccup mode.

For hiccup mode, the module will try to restart after shutdown. If the over current condition still exists, the module will shut down again. This restart trial will continue until the over-current condition is corrected.

Over-Voltage Protection

The modules include an internal output over-voltage protection circuit, which monitors the voltage on the output terminals. If this voltage exceeds the over-voltage set point, the module will shut down, and enter in hiccup.

For hiccup mode, the module will try to restart after shutdown. If the over voltage condition still exists, the module will shut down again. This restart trial will continue until the over-voltage condition is corrected.

Over-Temperature Protection

The over-temperature protection consists of circuitry that provides protection from thermal damage. If the temperature exceeds the over-temperature threshold the module will shut down, and enter in hiccup.

For hiccup mode, the module will try to restart after shutdown. This restart trial will continue until the over-temperature condition is corrected.

Remote On/Off

The remote on/off feature on the module can be either negative or positive logic. Negative logic turns the module on during a logic low and off during a logic high. Positive logic turns the modules on during a logic high and off during a logic low.

Remote on/off can be controlled by an external switch between the on/off terminal and the Vi(-) terminal. The switch can be an open collector or open drain.

For negative logic if the remote on/off feature is not used, please short the on/off pin to Vi(-). For positive logic if the remote on/off feature is not used, please leave the on/off pin floating.

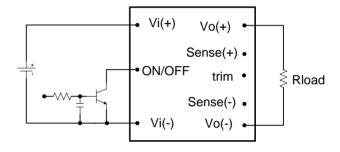


Figure 14: Remote on/off implementation

Remote Sense

Remote sense compensates for voltage drops on the output by sensing the actual output voltage at the point of load. The voltage between the remote sense pins and the output terminals must not exceed the output voltage sense range given here:

$$[Vo(+) - Vo(-)] - [SENSE(+) - SENSE(-)] \le 10\% \times Vout$$

This limit includes any increase in voltage due to remote sense compensation and output voltage set point adjustment (trim).

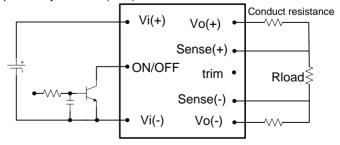


Figure 15: Effective circuit configuration for remote sense operation

FEATURES DESCRIPTIONS (CON.)

If the remote sense feature is not used to regulate the output at the point of load, please connect SENSE(+) to Vo(+) and SENSE(-) to Vo(-) at the module.

The output voltage can be increased by both the remote sense and the trim; however, the maximum increase is the larger of either the remote sense or the trim, not the sum of both.

When using remote sense and trim, the output voltage of the module is usually increased, which increases the power output of the module with the same output current.

Care should be taken to ensure that the maximum output power does not exceed the maximum rated power.

Output Voltage Adjustment (TRIM)

To increase or decrease the output voltage set point, connect an external resistor between the TRIM pin and the SENSE(+) or SENSE(-). The TRIM pin should be left open if this feature is not used.

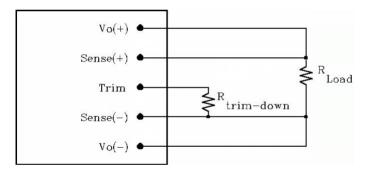


Figure 16: Circuit configuration for trim-down (decrease output voltage)

If the external resistor is connected between the TRIM and SENSE (-) pins, the output voltage set point decreases. The external resistor value required to obtain a percentage of output voltage change $^{\triangle}$ % is defined as:

$$Rtrim - down = \left\lceil \frac{511}{\Delta} - 10.2 \right\rceil (K\Omega)$$

Ex. When Trim-down -10% (12Vx0.9=10.8V)

$$Rtrim - down = \left[\frac{511}{10} - 10.2\right] (K\Omega) = 40.9(K\Omega)$$

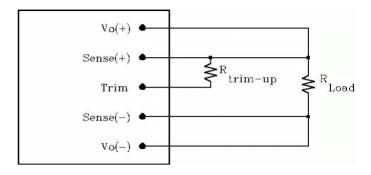


Figure 17: Circuit configuration for trim-up (increase output voltage)

If the external resistor is connected between the TRIM and SENSE (+) the output voltage set point increases. The external resistor value required to obtain a percentage output voltage change $^{\triangle}$ % is defined as:

$$Rtrim - up = \frac{5.11 \text{Vo} (100 + \Delta)}{1.225 \Delta} - \frac{511}{\Delta} - 10.2 (K\Omega)$$

Ex. When Trim-up +10% (12V×1.1=13.2V)

$$Rtrim - up = \frac{5.11 \times 12 \times (100 + 10)}{1.225 \times 10} - \frac{511}{10} - 10.2 = 489.3 (K\Omega)$$

The output voltage can be increased by both the remote sense and the trim, however the maximum increase is the larger of either the remote sense or the trim, not the sum of both.

When using remote sense and trim, the output voltage of the module is usually increased, which increases the power output of the module with the same output current.

Care should be taken to ensure that the maximum output power of the module remains at or below the maximum rated power.

THERMAL CONSIDERATIONS


Thermal management is an important part of the system design. To ensure proper, reliable operation, sufficient cooling of the power module is needed over the entire temperature range of the module. Convection cooling is usually the dominant mode of heat transfer.

Hence, the choice of equipment to characterize the thermal performance of the power module is a wind tunnel.

Thermal Testing Setup

Delta's DC/DC power modules are characterized in heated vertical wind tunnels that simulate the thermal environments encountered in most electronics equipment. This type of equipment commonly uses vertically mounted circuit cards in cabinet racks in which the power modules are mounted.

The following figure shows the wind tunnel characterization setup. The power module is mounted on a test PWB and is vertically positioned within the wind tunnel. The space between the neighboring PWB and the top of the power module is constantly kept at 6.35mm (0.25").



Note: Wind Tunnel Test Setup Figure Dimensions are in millimeters and (Inches)

Figure 18: Wind tunnel test setup

Thermal Derating

Heat can be removed by increasing airflow over the module. To enhance system reliability, the power module should always be operated below the maximum operating temperature. If the temperature exceeds the maximum module temperature, reliability of the unit may be affected.

THERMAL CURVES (WITHOUT HEAT SPREADER)

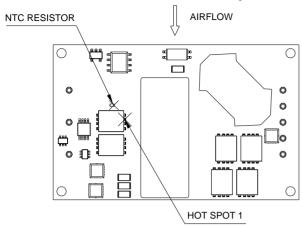


Figure 19: Temperature measurement location.* The allowed maximum hot spot1 temperature is defined at $125^{\circ}C$

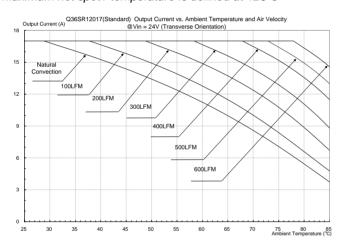


Figure 20: Output current vs. ambient temperature and air velocity @Vin=24V(Transverse Orientation, Airflow direction from Vin+ to Vin-, without heat spreader)

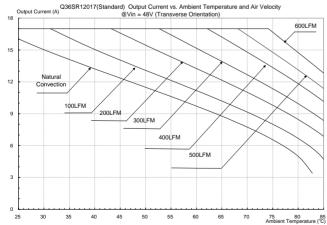


Figure 21: Output current vs. ambient temperature and air velocity @Vin=48V(Transverse Orientation, Airflow direction from Vin+ to Vin-, without heat spreader)

THERMAL CURVES (WITH HEAT SPREADER)

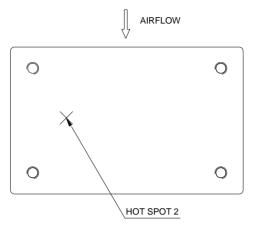


Figure 22: Temperature measurement location.* The allowed maximum hot spot 2 temperature is defined at 110 $^{\circ}$ C

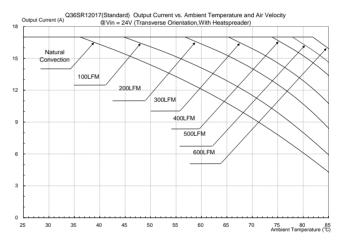


Figure 23: Output current vs. ambient temperature and air velocity @Vin=24V(Transverse Orientation, Airflow direction from Vin+ to Vin-, with heat spreader)



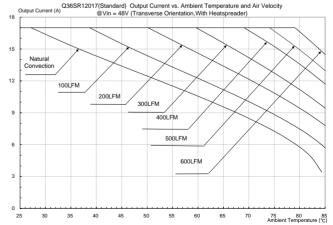


Figure 24: Output current vs. ambient temperature and air velocity @Vin=48V(Transverse Orientation, Airflow direction from Vin+ to Vin-, with heat spreader)


MECHANICAL DRAWING (WITH HEAT-SPREADER)

For modules with through-hole pins and the optional heatspreader, they are intended for wave soldering assembly onto system boards; please do not subject such modules through reflow temperature profile.

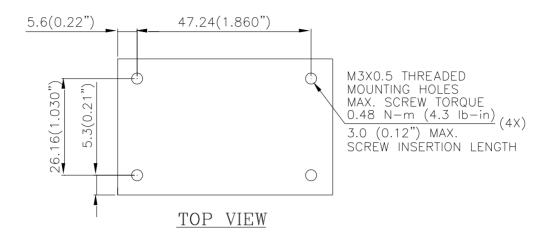

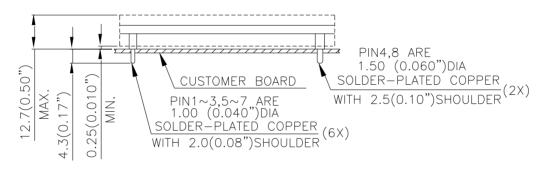



SIDE VIEW

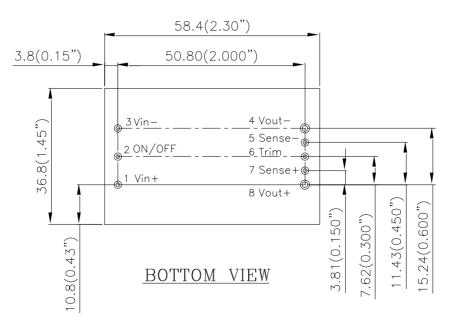

NOTES:

MECHANICAL DRAWING (WITHOUT HEAT-SPREADER)

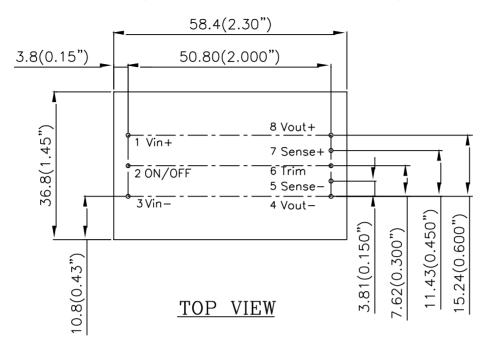

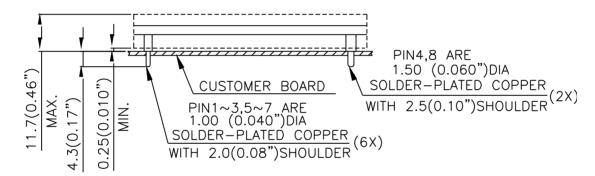

SIDE VIEW

NOTES:


<u>Pin No.</u>	<u>Name</u>	<u>Function</u>		
1	+Vin	Positive input voltage		
2	ON/OFF	Remote ON/OFF		
3	-Vin	Negative input voltage		
4	-Vout	Negative output voltage		
5	-Sense	Negative remote sense		
6	Trim	Output voltage trim		
7	+Sense	Positive remote sense		
8	+Vout	Positive output voltage		

Pin Specification:

Pins 1-3,5-7 1.00mm (0.040") diameter Pins 4 & 8 1.50mm (0.060") diameter

Note: All pins are copper alloy with matte tin(Pb free) plated over Ni under-plating.

RECOMMENDED PAD LAYOUT(THROUGH-HOLE MODULE)

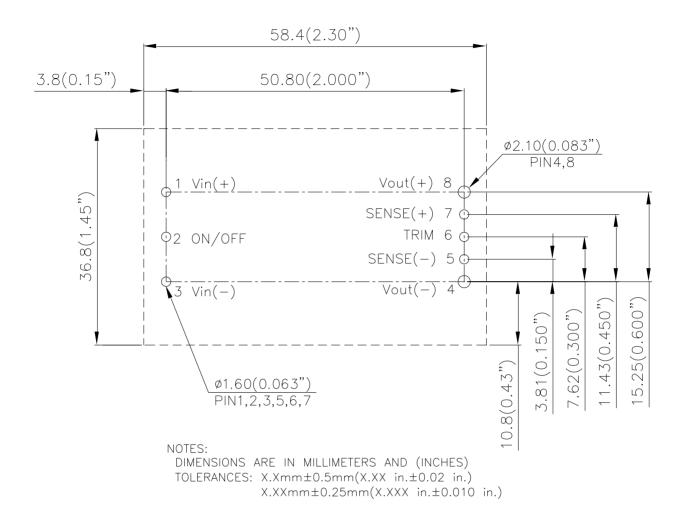

PART NUMBERING SYSTEM

Q	36	S	R	120	17	N	R	F	Α
Type of Product	Input Voltage	Number of Outputs	Product Series	Output Voltage	Output Current	ON/OFF Logic	Pin Length/Type		Option Code
Q - 1/4	36 -	S - Single	R - Regular	120 - 12V	17 - 17A	N -	R - 0.170"	Space -	A - open frame
Brick	18V~75V					Negative	N - 0.146"	RoHS 5/6	H-with heat spreader
						P - Positive	K - 0.110"	F-	Z - no heat spreader,
								RoHS 6/6	3KV isolation.
								(Lead Free)	Y - with heat spreader,
									3KV isolation

RECOMMENDED PART NUMBER

MODEL NAME	INPUT		OU	TPUT	EFF @ 100% LOAD
Q36SR12017NRFA	18V~75V	15A	12V	17A	93.0% @ 48Vin
Q36SR12017NNFA	18V~75V	15A	12V	17A	93.0% @ 48Vin
Q36SR12017NKFA	18V~75V	15A	12V	17A	93.0% @ 48Vin
Q36SR12017NKFH	18V~75V	15A	12V	17A	93.0% @ 48Vin
Q36SR12017NRFZ	18V~75V	15A	12V	17A	93.0% @ 48Vin

Default remote on/off logic is negative and pin length is 0.170"

CONTACT: www.deltaww.com/dcdc

USA: Telephone:

East Coast: 978-656-3993 West Coast: 510-668-5100 Fax: (978) 656 3964 Email: dcdc@deltaww.com

Europe:

Phone: +31-20-655-0967 Fax: +31-20-655-0999 Asia & the rest of world:

Telephone: +886 3 4526107

Ext 6220~6226 Fax: +886 3 4513485

WARRANTY

Delta offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.

^{*} For modules with through-hole pins and the optional heatspreader, they are intended for wave soldering assembly onto system boards; please do not subject such modules through reflow temperature profile.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta Electronics:

Q36SR12017NRFA Q36SR12017NKFA Q36SR12017NNFA