



How storage placement changes DOC pulse peaks


a Two ways to match strength

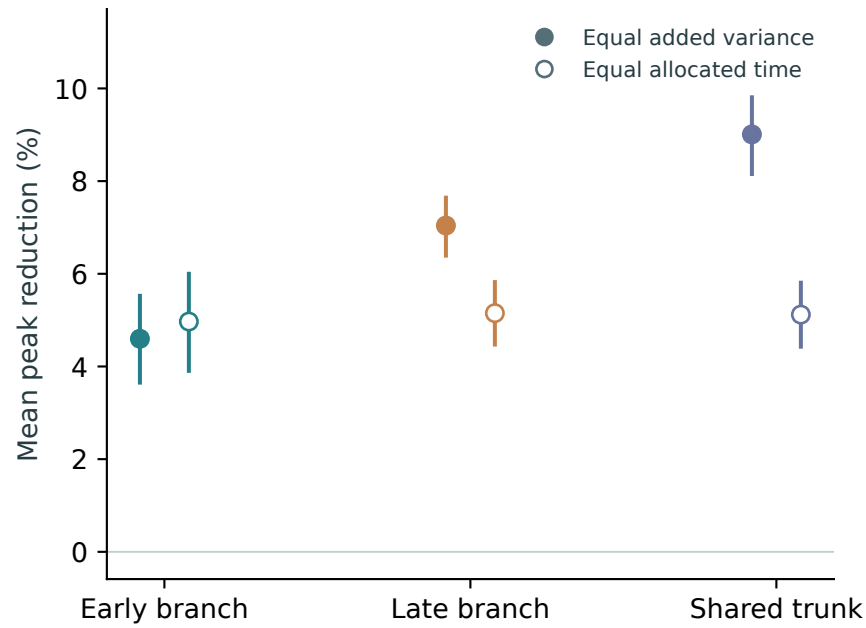


b Within the three river forms

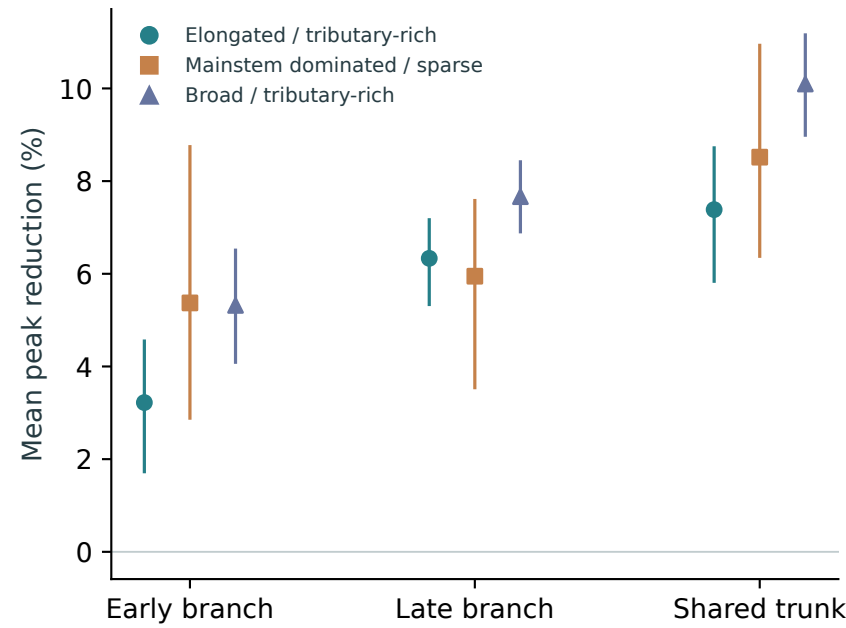


c Paired placement differences

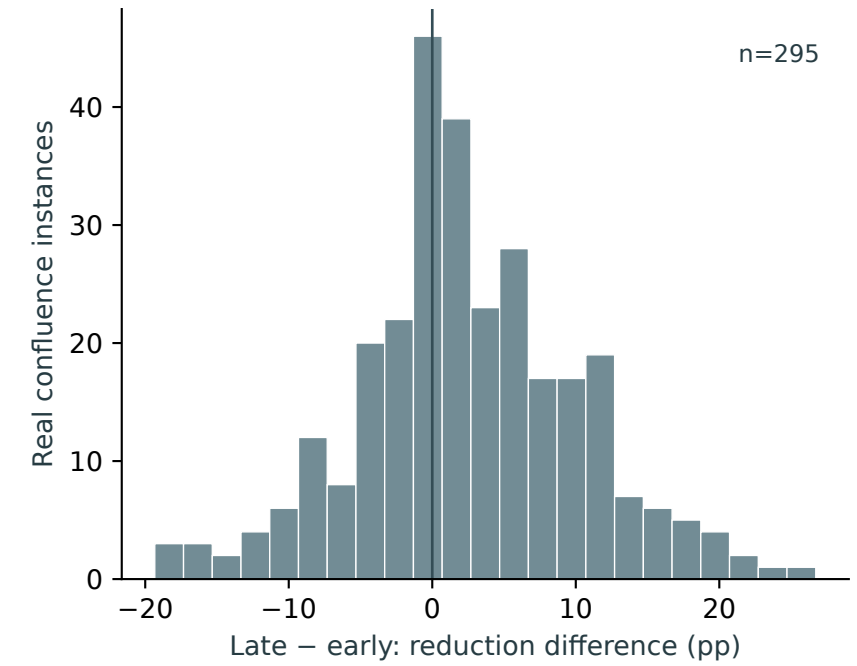


d Peak increase requires greater overlap

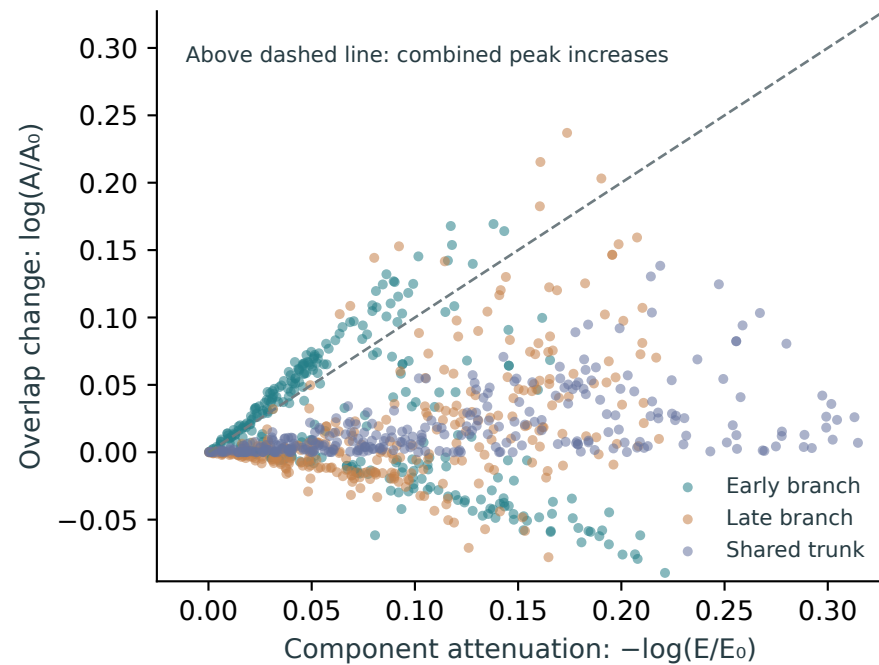

e Sensitivity to branch flow shares

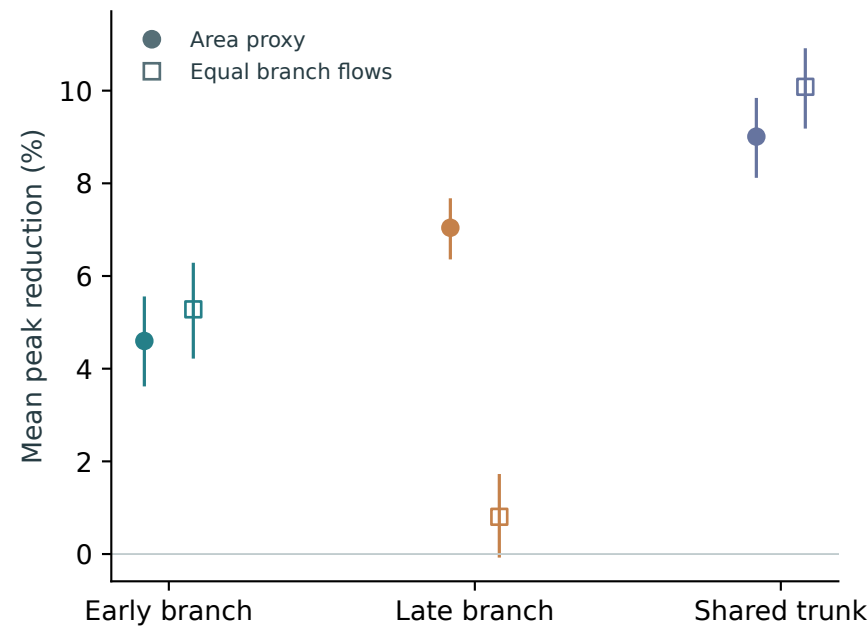

f Replication on monitored footprints

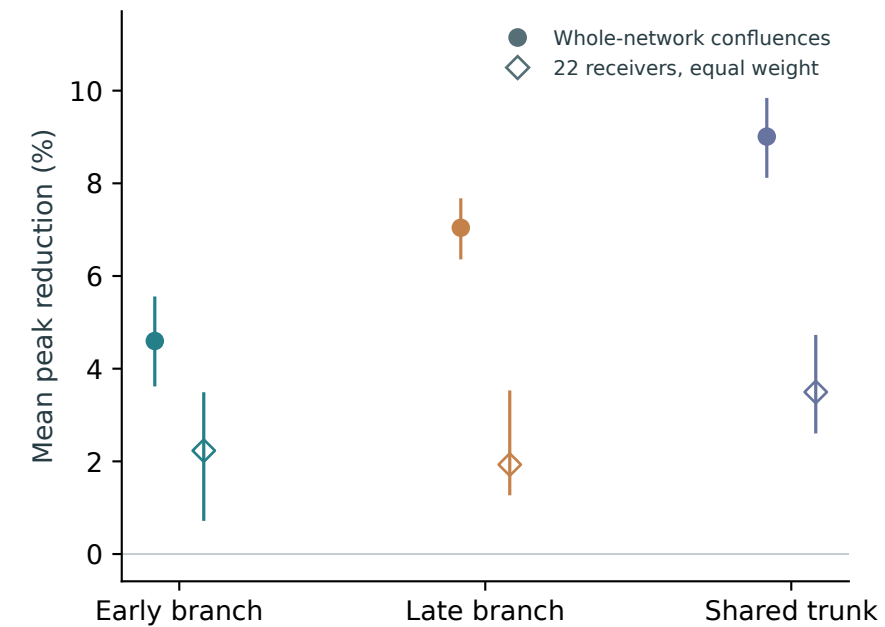

Middle pulse SD=0.15; 50% of feasible strength. 295 confluences, instance equal; 59 monitored footprints averaged within 22 receivers. Intervals: 5,000 HUC4 / monitoring-system block resamples of geometry means, not uncertainty of field peaks. Peak = component envelope E $\times$ overlap ratio A .