

Know More About Us:

Web: www.hithium.com

Web: www.hithium-arkvolt.com

Become Our Partner:

Email: RESS@HITHIUM.COM

ARKVOLT

HiTHIUM Residential Energy Storage

Back to essentials, built to last



TOP

2

CONTENTS

Data source: InfoLink Consulting, SMM Shanghai Nonferrous Metals Network

01

About HiTHIUM

- Lighthouse Factory
- Global Presence
- ESG

02

About ARKVOLT

03

Residential ESS&BESS

- ARKVOLT F8S
- ARKVOLT L16
- ARKVOLT L16S
- ARKVOLT 30 Series
- ARKVOLT I12C

04

RESS Inverter

- HES 5-6KT
- ET G2 Series



TOP 2

TOP 2 in global energy storage battery

AA

PV Tech Research Q4 2025

BNEF Tier 1

BNEF Energy Storage Tier 1 List 2Q 2025

MISSION •

Let green energy benefit all.

VISION •

To become a respected global green energy company with leading technology.

ABOUT HiTHIUM

Founded in 2019, HiTHIUM is one of the world's leading energy storage companies and a top-tier battery cell manufacturer dedicated exclusively to energy storage applications. Backed by advanced R&D capabilities, large-scale manufacturing, and a global service network, HiTHIUM delivers reliable battery products and energy storage solutions to customers worldwide. Today, our products are deployed across more than 30 countries and regions, helping accelerate the global transition to clean energy.

HiTHIUM

ABOUT RESS

The HiTHIUM Residential Energy Storage Business Unit is a core business unit of HiTHIUM, dedicated to safe, efficient, and intelligent clean energy solutions for households worldwide.

Built on HiTHIUM’ s deep expertise in battery technology and energy storage systems, we drive technological innovation and global brand development. Guided by our vision of “Making green energy accessible to all,” we aim to remove barriers to clean energy adoption, bring tailored energy solutions to every home, and become a trusted partner in the global household energy transition.



VISION •

To become the preferred partner for global household energy transition, and make green energy truly accessible to every household.

MISSION •

With industrial-grade safety standards and full-stack technical capabilities, we customize safe, efficient and intelligent clean energy solutions for global families and reshape the value of household energy.

ABOUT ARKVOLT

Designed for high-end markets, Arkvolt responds to increasingly stringent energy efficiency standards and evolving customer needs with a technology-driven approach.

Centered on the philosophy of “Back to essentials, built to last.” Arkvolt represents our commitment to safer, smarter, and more dependable residential energy storage solutions.

ABOUT RESS

HiTHIUM

*The World's First Lighthouse Factory in the Energy Storage Battery Sector

The World Economic Forum (WEF) has unveiled the 2026 Global Lighthouse Network list. HiTHIUM Chongqing Manufacturing Base is selected, becoming the world's first Lighthouse Factory in the energy storage battery sector and driving the industry to new heights.



GLN Lighthouse

R&D And Manufacturing

HiTHIUM produces energy storage batteries with superior safety, high efficiency, long cycle life and minimized cost. Our game-changing innovations contribute to technologically advanced solutions that benefit business and society.

Four Research Institutes



Battery Research Institute
Leading battery chemistry development



System Research Institute
Control technology strategy implementation




AI Research Institute
Dedicated to the deep integration of AI and energy storage



Engineering Research Institute
Focus on advanced manufacturing capabilities

Intellectual Property Portfolio

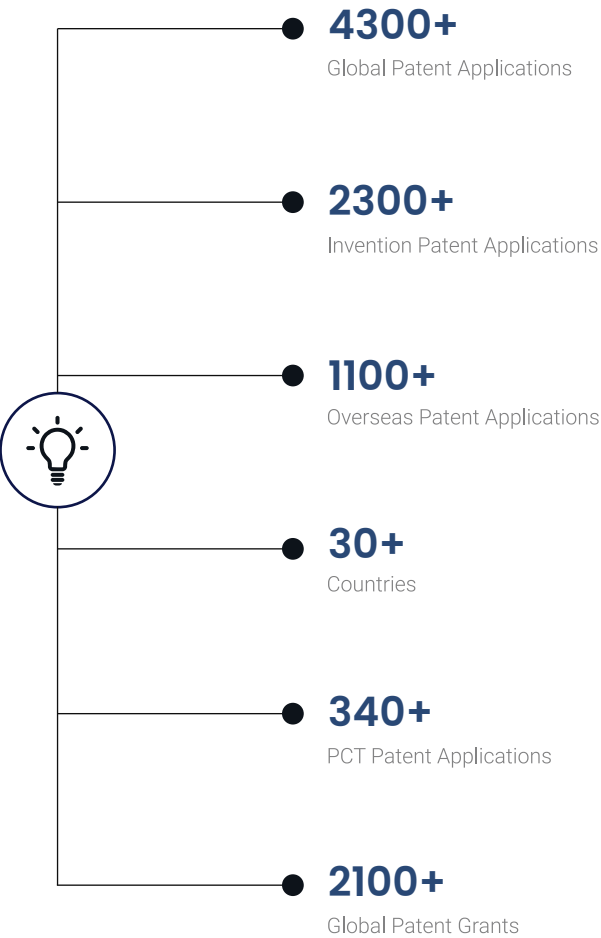

Intelligent Manufacturing

7 Modules	Data collection, quality, production, equipment, planning, storage and process
46 Processes	Data traceability from material feeding to delivery
70+	Online management of the reports on quality, production, equipment, process, etc
97	Product characteristics – CCSC
600+	Process control points
ISO 9001	Implementing ISO 9001:2015 QMS



Globalization Strategy

As one of the few Chinese energy storage companies to achieve full-chain globalization—covering products, manufacturing capacity, sales, and services, HiTHIUM is actively advancing its international strategy. The company is dedicated to embedding itself in local markets and communities, building end-to-end localized operations to serve global customers and support regional growth with local partners.

• R&D and Manufacturing Base





Global ESG Commitment

Let Green Energy Benefit All & Help Strivers Realize Their Dreams

Deliver the highest batteries sustainably, while practicing our values

E

- Reduce Absolute Scope 1&2 GHG Emission 58.80% in 10 Years
- Reduce Scope 3 GHG Emission 63.80% Per kWh of Battery Capacity in 10 Years

S

- Reliable Quality to Set Industry Benchmarks
- Compliant, Resilient and Sustainable Supply Chain Management
- Equitable, Diverse and Inclusive Workplace

G

- Zero Tolerance for Bribery
- Compliant Corporate Operations
- Protect Intellectual Property
- Uphold Information Security Bottom Line

HITHIUM

HITHIUM is committed to building the world's top brand of energy storage, promoting green development in various industries, and fully demonstrating the company's positive influence in environmental, social, and governance aspects.

Innovative

- Opportunities in Clean Tech
- Product Carbon Footprint
- Environmental Management and Resource Optimization
- Addressing Climate Change

Empower

- Employee Training and Development
- Occupational Health and Safety

Proactive

- Product Quality and Safety
- Customer Relationship Management
- Product Recycling

Achievable

- Energy Equality
- Community Communication and Charity

Collaborative

- Sustainable Supply Chain Management
- Industry Collaboration and Low-carbon Transformation

Transparent

- Corporate Governance and Business Ethics
- Intellectual Property Rights
- Information Security and Privacy Protection

Digital Intelligence Integration

Value Chain Partnership

Sustainable Talent Development

ESG Milestone



Compliance Development Philosophy

Compliance Operations
Steady Development



Responsible Supply Chain Philosophy

Fairness and Equity
Win-win Cooperation



Community Development Philosophy

Giving Back to Society
Collaborative Advancement



Green Operation Philosophy

Green Technology
Low-carbon Circularity

Aug 2023

UNGC

Joined United Nations Global Compact

Dec 2023

SA 8000

Social Accountability Management System Certification

ISO 27001

Information Security Management System Certification

Jan 2024

Zero-Carbon Leadership Enterprise Award

Energymagazine "ESGZero-Carbon Pioneer" Prize

Mar 2024

ISO 50001

Energy Management System Certification

Apr 2024

ISO 14064

GHG Inventory Report for Xiamen HITHIUM Energy Storage in 2023

Apr 2024

ISO 14067

280Ah LFP Cell Product Carbon Footprint Certification

Jun 2024

Top 10 Exemplary Environment & Top 10 Exemplary Responsibility Contribution

Green Sustainable ESG Case 2024 Top 100 Role Models

Oct 2024

ISO 56005

Innovation and Intellectual Property Management (Level 1)

Apr 2025

Grade B in CDP climate questionnaire

Passed the validation on near-term target-setting SBTi

Oct 2025

EcoVadis Gold Medal for Sustainability

the Top 5% of Rated Companies Worldwide

CERTIFICATIONS AND HONORS

CERTIFICATIONS



280 BESS TÜV SÜD Mark



314 BESS TÜV SÜD Mark




314 CELL TÜV SÜD Mark



System Product Calculation
Certification (TÜV Rheinland)



TUV62443 Certifications



UL Fire Test Certification



CTEAS After-Sales Service System
Perfection Certification Certificate



NECAS National Commodity After-Sales
Service Compliance Certification Certificate

2022 Awards



2022 Influential Brand in China
PV-Storage-Charging Industry



China Energy Storage Industry Most
Influential Enterprise of the Year



China Energy Storage Industry Best Energy
Storage Battery Supplier of the Year



The 11th "Polaris Cup" 2022 Annual Influential
Enterprise in PV-Storage Integrated Solutions

2023 Awards



High-tech Golden Ball Award 2023
Annual Project Case




2023 China Energy Storage Industry Best Innovation Enterprise Award
2023 China Energy Storage Industry Most Influential Enterprise Award
2023 China Energy Storage Industry Best Energy Storage Battery Supplier Award



2023 China Energy Storage Technology Provider Top 10 in
Global Market Energy Storage Battery Shipments Ranking

2024 Awards



Benchmark Enterprise for Core Competitiveness
& ESG Comprehensive Governance




2024 China PV-Storage Industry Collaborative
Development Conference Energy Storage
Innovation Achievement Golden Craft Award



Top 10 Model Responsibility Contribution Cases -
Model Environment Practice



2024 China New Energy Storage Science and
Technology Award

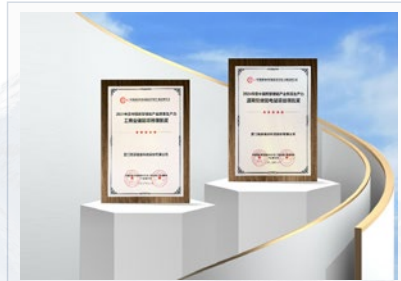

Commercial & Industrial Energy Storage Project Leadership Award
Grid-side Energy Storage Power Station Project Leadership Award



2024 Most Influential Enterprise in the
Energy Storage Industry



2024 Typical Case of Dual Carbon Technology Innovation
2024 Global Top 500 New Energy Enterprises

ARKVOLT SERIES



ARKVOLT L16

ARKVOLT L16S

ARKVOLT 30AIO

ARKVOLT R30

ARKVOLT F8S

HES 5-6KT

ET G2 SERIES

ARKVOLT F8S

DC Optimized HV Battery, combines high-performance power delivery with flexible system integration, maximizing system efficiency and extending battery life.



PRODUCT DETAILS

Model	ARKVOLT F8S			
Battery module capacity	8kWh			
Number of battery modules	1			
Battery usable capacity	8kWh			
Rated output power	4000W			
Nominal voltage	600V			
Operating voltage range	482V-657V			
Rated input power	4000W			
Rating	IP65			
Cycle life	≥8000 cycles, @25°C, @0.5C, @90%DOD, @70%SOH			
Scalability	Up to 32 battery modules in parallel			
Weight	Approx 79.5kg	Approx 142kg	Approx 203kg	Approx 265kg
Dimension (L*W*H mm)	600*260*706	600*260*1153	600*260*1600	600*260*2047
Operation temperature range	Charge -20~55°C (0~55°C without battery heating module) Discharge -20~55°C			
Relative humidity	5%~95%, No condensation			
Certifications	IEC 62619, IEC 62477, CE, UN38.3, MSDS, ROHS, REACH			



Built-in DC Optimizer

- 4kW DC-BMS integrated
- Mix-batch building possible
- Simplified inventory management



Flexible Capacity Expansion

- 8kWh per pack modular design
- 8~32kWh per cluster(stack)
- Parallel up to 256kWh



High Safety & Reliability

- Grid-proven LFP cells
- 11000 cycles lifespan
- Low heat production



Installation friendly

- IP65 rated enclosure
- Optional heating function

*The above is for reference only, the specification sheet shall prevail.

ARKVOLT L16

51.2V/16kWh, 8000+ cycle life, IP65 protection rating. Adopting grid-grade LFP cells to set the reliability benchmark for home energy storage, delivering long-duration silent protection and all-day energy independence.



PRODUCT DETAILS

Model	HPB-16LV 【ARKVOLT L16】
Battery Type	LiFePO ₄
Battery Capacity	16.07kWh
Nominal capacity	314Ah
Battery Cycles	≥8000 cycles, @25°C, @0.5C, @90%DOD, @70%SOH
Nominal Voltage	51.2V
Operation voltage range	44.8V~57.6V
Recommended charging current	≤157A
Recommended discharging current	≤157A
Max. charging current	200A
Max. discharging current	200A
Communications	RS485 / CAN
Scalability	Up to 32 batteries in parallel
Weight	Approx 123kg
Dimensions	L480*W278*H1025mm
Operation temperature range	Charge -20~55°C (0~55°C without battery heating module) Discharge -20~55°C
IP Rating	IP65
Humidity	10%~90%
Certifications	CE, IEC62619, IEC62040, UN38.3, MSDS, ROHS, REACH



51.2V Low-Voltage 314Ah Battery

- 16kWh capacity
- Expandable up to 512kWh
- Compatible with leading inverter brands



Optimized for Residential demands

- Up to 200A operating current
- Ideal for 8kW+ inverter systems
- Slim, compact, space-saving design



Long Cycle Life LFP Technology

- Proven 314Ah LFP cells
- Up to 11,000 cycles
- Low heat generation



Outdoor-Ready, Robust Design

- IP65-rated enclosure
- Optional heating function
- Reliable in harsh environments

*The above is for reference only, the specification sheet shall prevail.

ARKVOLT L16S

Revolutionary split-design Low-Voltage 200A 16kWh home battery, easy handling & installation



Unique Split-type LV battery

- 8kWh per module
- Stack-to-plug fast installation
- Scalable up to 256kWh



Long Cycle Life LFP technology

- Grid-proven LFP cells
- 11000 cycles lifespan
- Low heat production



Optimized for Residential demands

- Up to 200A high operating current
- Ideal with 8+kW inverters
- Compact slim and saving space



Outdoor-Ready, Robust Design

- IP65 rated enclosure
- Optional heating function

PRODUCT DETAILS

Model	ARKVOLT L16S
Battery Type	LiFePO ₄
Battery Capacity	16.07kWh
Nominal capacity	314Ah
Battery Cycles	≥8000 cycles, @25°C, @0.5C, @90%DOD, @70%SOH
Nominal Voltage	51.2V
Operation voltage range	44.8V~57.6V
Recommend charging current	≤157A
Recommend discharging current	≤157A
Max. charging current	200A
Max. discharging current	200A
Communications	RS485 / CAN / WiFi
Scalability	Up to 32 batteries in parallel
Weight	Approx. 137.5kg
Dimensions	L480*W278*H1025mm
Operation temperature range	Charge -20~55°C (0~55°C without battery heating module) Discharge -20~55°C
IP Rating	IP65
Humidity	10%~90%
Certifications	CE, IEC62619, IEC62040, UN38.3, MSDS, ROHS, REACH

*The above is for reference only, the specification sheet shall prevail.

ARKVOLT 30 Series

Ingenious modular 51.2V/587Ah battery system,
built to save workload and space.



PRODUCT DETAILS

Model	HPC-30LV-22U 【ARKVOLT R30】	HPC-30LV-44U 【ARKVOLT AIO30】
Battery Type	LiFePO ₄	
Battery Energy	30054.4Wh	
Cell Capacity	587Ah	
Battery Cycles	≥8000 @25°C±2°C, 0.5P, 70%SOH	
Rated Voltage	51.2[VDC]	
Charge Voltage Range	43.2~57.6[VDC]	
Discharge Voltage Range	43.2~57.6[VDC]	
Recommend Charge/Discharge Current	300A	
Maximum Charge/Discharge Current	300A	
Depth of Discharge (DoD)	100%	
Charge Mode	CC-CV	
Built-in Communication Ports	CAN/RS485/WIFI	
Display	LED	
Scalability	Up to 32 batteries in parallel	
Ingress Protection Level	IP20	
Protection	Over Temperature/Under Temperature/Over Charge/ Over Discharge/Over Current/Short Circuit/Reverse Connection/Failure	
Operating Temperature	Charging: -0°C~55°C Discharging: -20°C~55°C	
Storage Temperature	-20°C~60°C	
Humidity	10%~90%	
Net Weight/Dimensions	Approx. 350kg L600*W630*H1000mm	Approx. 600kg L600*W630*H1900mm

CertificationCE, IEC62619, IEC62040, UN38.3, MSDS, ROHS, REACH



One-Stop ESS Cabinet

- 30kWh high capacity
- Built-in distribution box
- Reserved place for Inverter, MPPT (AIO30)



Leading Safety & Reliability

- Grid-proven 587Ah LFP cells
- 11000 cycles lifespan
- Low heat production



Flexible Capacity Expansion

- 7.5kWh per pack modular design
- 30kWh expandable cabinet
- Parallel up to 960kWh



Installation friendly Modular design

- Slide-in quick plug system
- Easy to handle and transport
- Optional heating function

*The above is for reference only, the specification sheet shall prevail.

ARKVOLT 112C

112.5kWh

LEGEND 112C is suitable for C&I applications, helping to enhance power supply stability, reduce electricity costs, and improve power quality.



PRODUCT DETAILS

Performance		
Battery Type	LFP (LiFePO4)	
Battery Energy	112.5kWh	
Rated Voltage	358.4V	
Operating Voltage (Charge/Discharge)	302.4~408.8V	
Standard Charge/Discharge Current	157A	
Battery Cycles	≥8,000 cycles@(25°C, 100%DOD, 0.5P, @70%SOH)	
Depth of Discharge (DoD)	90%	
Communication	RS485, CAN, Ethernet	
Fire Protection System	Aerosol	
Operating Conditions		
Operating Temperature	Charge Temperature	0°C to 55°C
	Discharge Temperature	-20°C to 55°C
	Storage Temperature	-20°C to 60°C
Humidity	0~95% (no condensation)	
Cooling Strategy	Air-Cooling	
General		
Dimensions (W*D*H)	900*1000*2280mm	
Weight	1400kg	
Certifications	Ingress Rating	IP55
	Cell	UL9540A, UL1973, IEC62619, UN38.3
	Battery Certification	UN38.3 / CE / IEC 62619 / IEC 62477



Safety

The cabinet is built to withstand harsh environments, with integrated temperature and smoke monitoring, along with aerosol fire suppression.



Flexible Installation

Modular DC/AC split design allows for flexible parallel system expansion.



Smart Configuration

Output voltage levels and control strategies can be customized based on specific requirements.



Ultra-Long Life

Battery cycle life up to 11,000 times.

*The above is for reference only, the specification sheet shall prevail.

HPI-5-6K-LP1-EB

5-6kW | Single Phase
Hybrid Inverter (LV)



PRODUCT DETAILS

AC OUTPUT / INPUT DATA	HPI-5K-LP1-EB	HPI-6K-LP1-EB
Rated Power / W	5000	6000
Max. Apparent Power / VA	5500	6600
Max. Apparent Power from Grid / VA	10000	10000
Rated Grid Voltage / V	220/230/240	220/230/240
Rated Grid Frequency / Hz	50/60	50/60
Rated Output Current / A	21.7	26.1
Max. Output Current / A	23.9	28.7
Max. Current from Grid / A	40.0	40.0
Power Factor	0.8ind - 0.8cap	0.8ind - 0.8cap
THDi @ Rated Power	<3%	<3%
Grid Connection	L-N-PE	L-N-PE

AC OUTPUT DATA (BACK UP)		
Rated Power / W	5000	6000
Rated Output Voltage / V	220/230	220/230
Rated Output Frequency / Hz	50/60	50/60
Peak Output Apparent Power / VA	2 times of rated power for 3000-4000W@10s; 1.5 times for 6000/5000	
Rated Output Current / A	21.7	26.1
Switch Time / ms	<10	<10
THDV@ Rated Power	<2%	<2%

AC INPUT DATA (Generator)		
Max. Input Power / W	5000	6000
Rated Input Voltage / V	220/230	220/230
Rated Input Frequency / Hz	50/60	50/60
Rated Input Current / A	21.7	26.1

MODEL			
PV INPUT DATA			
HES-5000T	10000	Max.Input Voltage / V	600
		Start Up Voltage / V	70
HES-6000T	12000	MPP Voltage Range / V	80-550
		Max. Short Circuit Current / A	20/20
		No. of MPPTs/No. Strings Per MPPT	
		Max. Input Current / A	18/18
		Rated Input Voltage / V	360

BATTERY INPUT DATA					
Battery Type		Li-ion/ Lead-Acid		Rated Battery Voltage / V	48
Input Voltage Range / V		40~60		Max.Charging/Discharging Voltage / V	<=60 (Adjustable)
Max.charging/Discharging Current / A	HPI-5K-LP1-EB	HPI-6K-LP1-EB	120	Charging Strategy For Li-ion Battery	Self Adaption to BMS or without BMS
				Charging Strategy For Lead-acid Battery	3 Stages Curve
				Temperature Sensor	Optional (for Lead-Acid)
				Max.Charging/Discharging Power / W	5000

PROTECTION			
Anti-Islanding Protection	Integrated	Output Over Circuit Protection	Integrated
PV String Input Reverse Polarity Protection	Integrated	Output Short Circuit Protection	Integrated
Insulation Resistor Detection	Integrated	Over Voltage Protection	Integrated
Residual Current Monitoring Unit	Integrated	Surge Protection	DC Type II, AC Type III
		Battery Reverse Protection	Integrated
		Battery Terminal Temp Protection	Integrated

GENERAL DATA			EFFICIENCY	
Dimensions (W *H *D) / mm	455*365*182	Communication with CT Meter	RS485	MPPT Efficiency
Weight / kg	18.4	Operating Ambient Temperature / °C	-30 ~ +60	99.9%
User Interface	LCD&LED	Allowable Relative Humidity Range / %	0-100	Euro Efficiency
PV Connection Type	MC4/D4	Max. Operating Altitude / m	3000	97.6%
AC Connection Type	OT Terminals	Degree of Protection	IP65	Max. Efficiency
Battery Connection Type	Plug-in	Topology	Transformerless for PV Side / HF for Battery Side	98.0%
Communication with Cloud	WiFi/GPRS/4G/LAN (Opt)	Night Consumption / W	<5	Charged Efficiency@PV-Battery
Communication with BMS	CAN/RS485			96.0%
Cooling Method	Natural	Max. Parallel	9	Charged/Discharged Efficiency@Battery <=>Grid/Load
				95.0%



PV Ratio Up to 2.0

Get more out of your solar panels, ensuring maximum efficiency and harnessing the full power of your PV modules.



Grid Independence

Seamlessly integrate energy storage and management technologies to create a truly versatile and efficient system.



Shadow Scan Algorithm

Cutting technology optimizes the performance of each individual solar module, ensuring that every component of your solar system operates at peak efficiency.



Smart Load Function

enables you to strategically manage your electricity consumption during peak demand periods.

HPI-6-15K-HP3-EA

6-15kW | Three Phase | 2/3 MPPTs
Hybrid Inverter (HV)



Flexible & Adaptable Applications

- Integrated dry contact for external loads
- Backup with UPS-level switching <10ms
- Fast load response



Friendly & Thoughtful Design

- Plug & Play installations
- Elegant and compact design



Superb Safety & Reliability

- AI-driven AFCI¹ 3.0
- IP66 ingress protection
- Type II SPD on DC & AC sides



Higher Power Generation

- Unbalanced output up to 150%²
- Up to 160% PV input oversizing
- Parallel connection capability for increased output power

PRODUCT DETAILS

Technical Data	HPI-6K-HP3-EA	HPI-8K-HP3-EA	HPI-10K-HP3-EA	HPI-12K-HP3-EA	HPI-15K-HP3-EA
Battery Input Data					
Battery Type ^{*1}	Li-Ion				
Nominal Battery Voltage (V)	500				
Battery Voltage Range (V)	150 ~ 720				
Start-up Voltage (V)	150				
Number of Battery Input	1				
Max. Continuous Charging Current (A)	30	30	40	40	40
Max. Continuous Discharging Current (A)	30	30	40	40	40
Max. Charging Power (W)	9000	12000	15000	18000	24000
Max. Discharging Power (W)	6600	8800	11000	13200	16500
PV String Input Data					
Max. Input Power (W) ^{*2}	9600	12800	16000	19200	24000
Max. Input Voltage (V) ^{*3*4}	1000				
MPPT Operating Voltage Range (V) ^{*5}	120 ~ 850				
Start-up Voltage (V)	150				
Nominal Input Voltage (V)	620				
Max. Input Current per MPPT (A)	16				
Max. Short Circuit Current per MPPT (A)	24				
Number of MPP Trackers	2	2	3	3	3
Number of Strings per MPPT	1				
AC Output Data (On-grid)					
Nominal Output Power (W)	6000	8000	10000	12000	15000
Nominal Apparent Power Output to Utility Grid (VA)	6000	8000	10000	12000	15000
Max. Apparent Power Output to Utility Grid (VA) [†]	6000	8000	10000	12000	15000
Max. Apparent Power from Utility Grid (VA)	12000	16000	20000	20000	20000
Nominal Output Voltage (V)	400 / 380, 3L / N / PE				
Output Voltage Range (V) ⁷	170 ~ 290				
Nominal AC Grid Frequency (Hz)	50 / 60				
AC Grid Frequency Range (Hz)	45 ~ 65				
Max. AC Current Output to Utility Grid (A) ^{*8}	8.7	11.6	14.5	17.4	21.7
Max. AC Current From Utility Grid (A)	15.7	21.0	26.1 ^{*9}	26.1 ^{*9}	26.1 ^{*9}
Power Factor	0.8 leading ~ 0.8 lagging				
Max. Total Harmonic Distortion	<3%				
AC Output Data (Back-up)					
Back-up Nominal Apparent Power (VA)	6000	8000	10000	12000	15000
Max. Output Apparent Power without Grid (VA) ^{*10}	6000 (12000 @60sec)	8000 (16000 @60sec)	10000 (18000 @60sec)	12000 (18000 @60sec)	15000 (18000 @60sec)
Max. Output Apparent Power with Grid (VA)	6000	8000	10000	12000	15000
Max. Output Current (A)	13.0 (17.4 @60sec)	17.4 (23.3@60sec)	21.7 (26.1 @60sec)	21.7 (26.1@60sec)	21.7 (26.1@60sec)
Nominal Output Voltage (V)	400 / 380				
Nominal Output Frequency (Hz)	50 / 60				
Output THDv (@Linear Load)	<3%				
Efficiency					
Max. Efficiency	98.0%	98.0%	98.2%	98.2%	98.2%
European Efficiency	97.2%	97.2%	97.5%	97.5%	97.5%
Max. Battery to AC Efficiency	97.2%	97.5%	97.5%	97.5%	97.5%
MPPT Efficiency	99.5%				
Protection					
PV Insulation Resistance Detection	Integrated				
PV AFCI3.0	Optional				
Residual Current Monitoring	Integrated				
PV Reverse Polarity Protection	Integrated				
Battery Reverse Polarity Protection	Integrated				
Anti-islanding Protection	Integrated				
AC Overcurrent Protection	Integrated				
AC Short Circuit Protection	Integrated				
AC Overvoltage Protection	Integrated				
DC Switch	Integrated				
DC Surge Protection	Type II				
AC Surge Protection	Type II				
Remote Shutdown	Integrated				
General Data					
Operating Temperature Range (°C)	-35 ~ +60				
Relative Humidity	0 ~ 100%				
Max. Operating Altitude (m)	4000				
Cooling Method	Natural Convection				
User Interface	LED, WLAN + APP				
Communication with BMS	RS485, CAN				
Communication with Meter	RS485				
Communication with Portal	WiFi + LAN + Bluetooth				
Weight (kg)	23	23	25	25	25
Dimension (W × H × D mm)	496 × 460 × 221				
Topology	Non-isolated				
Ingress Protection Rating	IP66				
Mounting Method	Wall Mounted				

^{*1}: The Li-Ion battery usually contain two mainstream type: LFP and Ternary Lithium battery.
^{*2}: Max. input power, not continuous for 1.6*normal power. Besides, in Australia, for most of the PV modules, the max. input power can reach 2*P_n, for example, the max. input power of HPI-6K-HP3-EA can reach 12000W.
^{*3}: For 1000V system, the maximum operating voltage is 950V.
^{*4}: When the input voltage ranges from 975V to 1000V, the inverter will enter the standby mode, and the voltage returns to 975V to enter the normal operation state.
^{*5}: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.

^{*6}: According to the local grid regulation.
^{*7}: Output Voltage Range: phase voltage.
^{*8}: When the three-unbalance function is activated, the Max. AC Current Output to the on-grid load can reach 13A, 17.4A, 21.7A, 21.7A and 21.7A respectively.
^{*9}: If the inverter is installed with the 3 × 25A AC breaker, it is suggested that the consumption and feed-in AC power should be less than 11040W (0.8×0.8×25×230×3)
^{*10}: Can be reached only if PV and battery power is enough.
*: Please visit the HITHIUM official website for the latest certificates.