


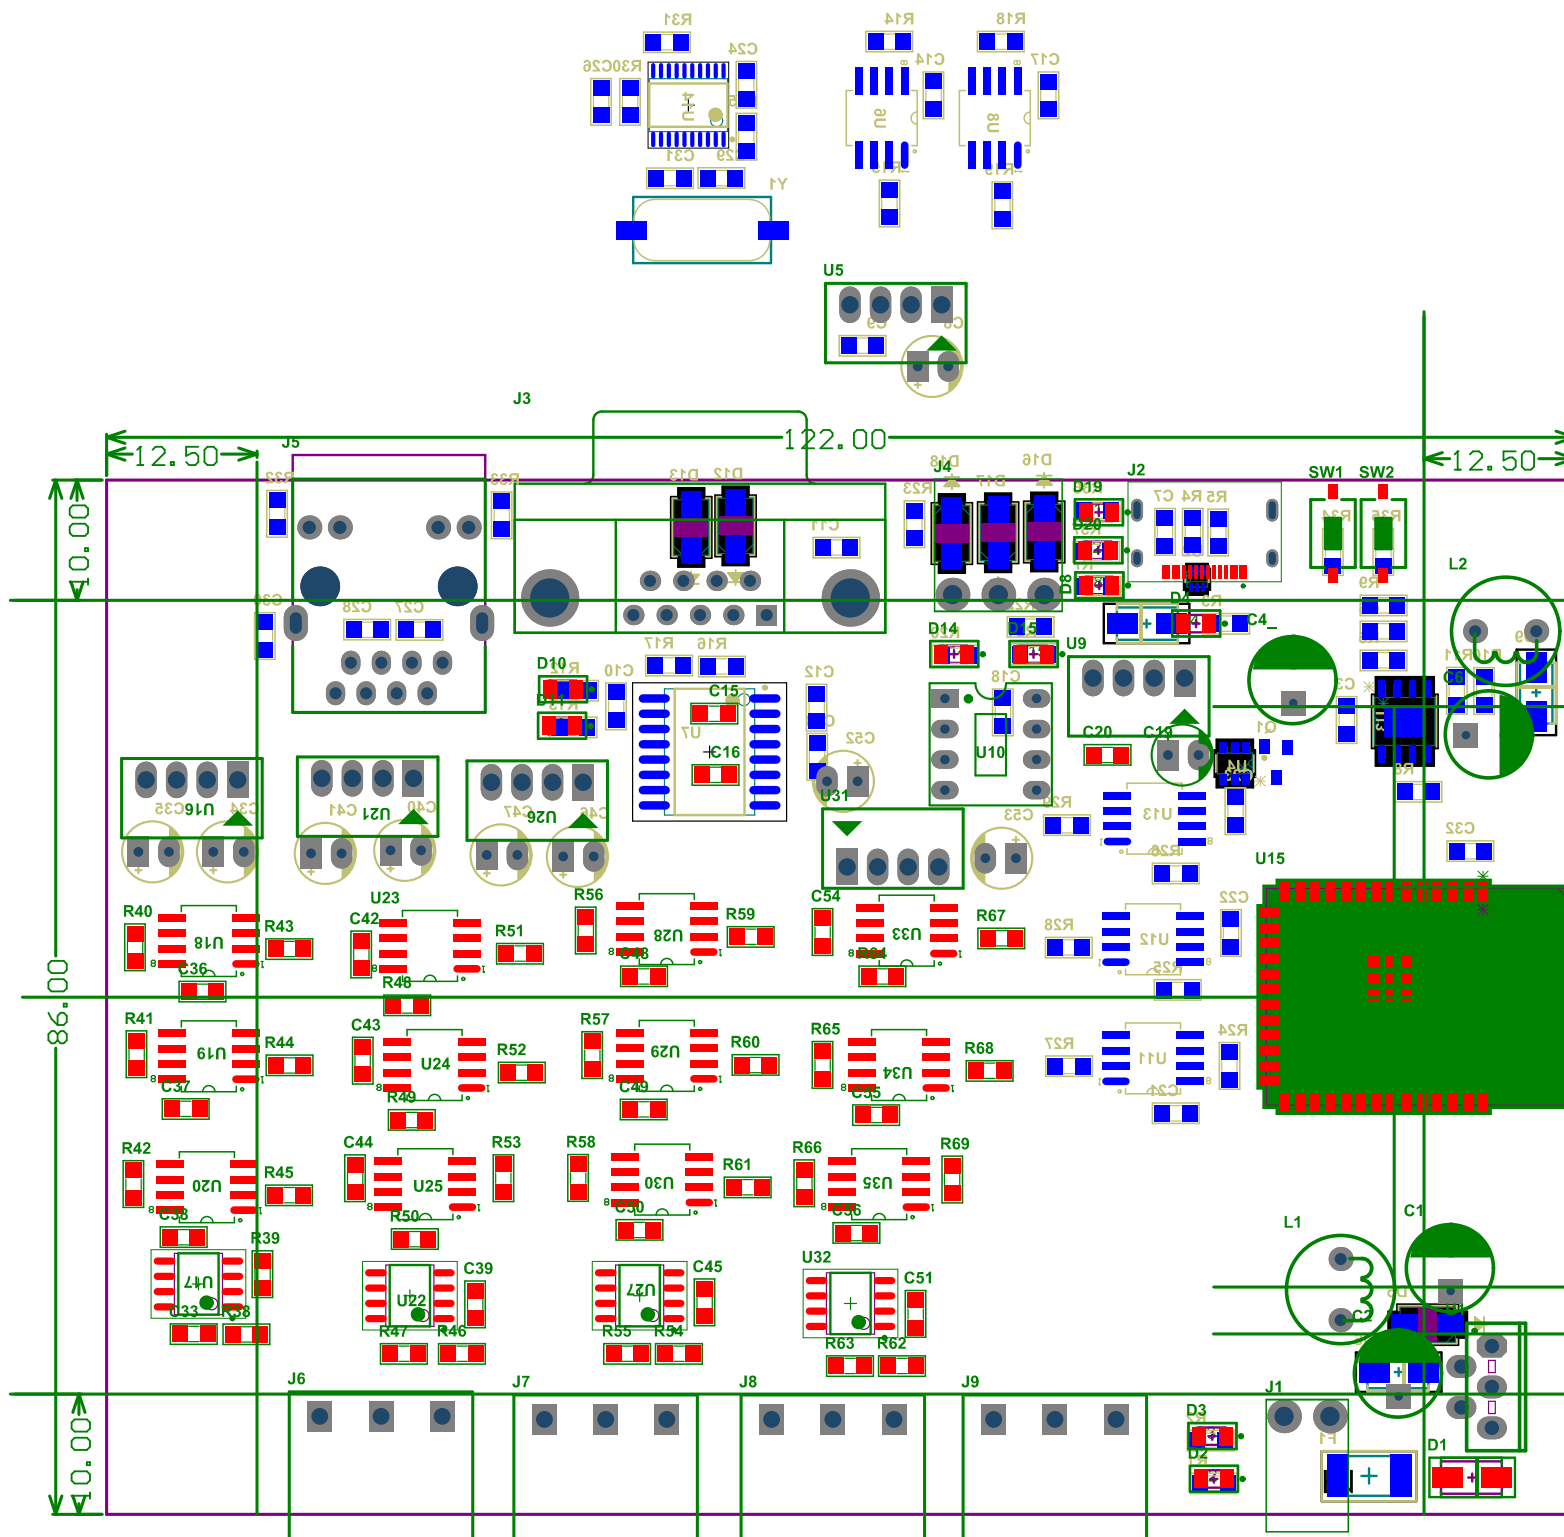

Line #	Name	Description	Designator	Quantity	Manufacturer 1	Manufacturer Part Number 1	Manufacturer Lifecycle 1	Supplier 1	Supplier Part Number 1	Supplier Unit Price 1	Supplier Subtotal 1
	U20-C-H4-M3MT-4P28-7B		J2	1							
	MP1584EN-LF-Z	mp3A,15MHz 28V Step-Down Converter(2/p)	U3	1							
	HCPL0600	2.5A Gate Driver Optical Coupling 3750Vrms 1 Channel 8-DIP Gull Wing	U6, U8, U11, U12, U13, U18, U19, U20, U23, U24, U25, U28, U29, U30, U33, U34, U35	17							
	MCP3201	12-BIT A/D CONVERTOR	U17, U22, U27, U32	4				Digi-Key	MCP3201-CVSN-ND		
	B050S	Cdm	U5, U9, U16, U21, U26, U31	6							
	Cap2	Capacitor	C1, C4, C6	3							
	Cap	Capacitor	C3, C10, C14, C17, C18, C21, C22, C23, C24, C25, C26, C32, C33, C36, C37, C38, C39, C42, C43, C44, C45, C48, C49, C50, C51, C54, C55, C56	28							
	Cap	Capacitor	C5	1							
	Cap	Capacitor	C7, C11, C30	3							
	Cap	Capacitor	C8, C19, C34, C40, C46, C52	6							
	Cap	Capacitor	C9, C12, C13, C15, C16, C20	6							
	Cap	Capacitor	C17, C28	2							
	Cap	Capacitor	C29, C31	2							
	Cap	Capacitor	C35, C41, C47, C53	4							
	25 MHz	Crystal Oscillator	Y1	1							
	ESP32-S3-WROOM-3-NB	Description	U15	1							
	SP232	Enhanced RS-232 Line Drivers/Receivers	U7	1							
	USBL06-2P6	ESD Protection for USB 2.0 High Speed	U2	1							
	3A	Fuse	F1	1							
	HR9L1105A	Harris HR9L1105A-RJ-45 Connector	J5	1							
	MF-3-B10-2P	Header, 2-Pin	J1	1							
	MF-3-B1-2P	Header, 2-Pin	J4	1							
	20DG-08-3P	Header, 3-Pin	J6, J7, J8, J9	4							
	A0347A	HEXRET P- Channel Power MOSFET	Q1	1							
	Inductor	Inductor	L1	1							
	Inductor	Inductor	L2	1							
	LT04412E3647RM	Low Loss PowerPath,LC Controller in ThruSOT	U4	1							
	PBF	Polarized Capacitor (Axial)	C2	1							
	D Connector 9	Receptacle Assembly, 9 Position, Right Angle	J3	1							
	Res1	Resistor	R1	1							
	Res1	Resistor	R2	1							
	Res1	Resistor	R3, R7, R12, R13, R19, R20, R21, R29, R43, R44, R46, R51, R52, R53, R59, R60, R61, R67, R68, R69	20							
	Res1	Resistor	R4, R5, R6, R10, R31	5							
	Res1	Resistor	R8	1							
	Res1	Resistor	R9	1							
	Res1	Resistor	R11	1							
	Res1	Resistor	R14, R18, R24, R25, R26, R34, R35, R36, R39, R40, R41, R42, R46, R47, R48, R49, R50, R54, R55, R56, R57, R58, R62, R63, R64, R65, R66	27							
	Res1	Resistor	R15, R27, R28, R32, R33, R36, R37	7							
	Res1	Resistor	R16, R17, R22, R23, R30	5							
	MAX485	RS232 - RS485 (Name 975378)	U10	1							
	1N5822	Schottky Diode	D1, D6, D7, D9	4							
	LM2576W/T-5.0	SAMPLE SWITCHER; 3A Step-Down Voltage Regulator	U1	1							
	SW-2MD	Switch	SW1, SW2	2							
	SMA13CA	TVS DIODE 30V 48.4V DO214AC	D5	1							
	SMA115CA	TVS DIODE 30V 48.4V DO214AC	D12, D13	2							
	SMA19CA	TVS DIODE 30V 48.4V DO214AC	D16, D17, D18	3							
	CH8121	Type Ethernet Transceiver Number of ports: Ethernet Speed Standards:10BASE T ; 100BASE-TX Data Rate:100Mb/s ; 100Mb/s Voltage Supply:3.2V-3.4V Voltage - Supply:3.2V-3.4V Operating Temperature:- 40°C~+85°C Operating Temperature:- 40°C~+85°C Features:Program mable	U14	1							
	LED	Typical INFRARED GaAs LED	D2, D3, D4, D8, D10, D11, D14, D15, D19, D20	10							