
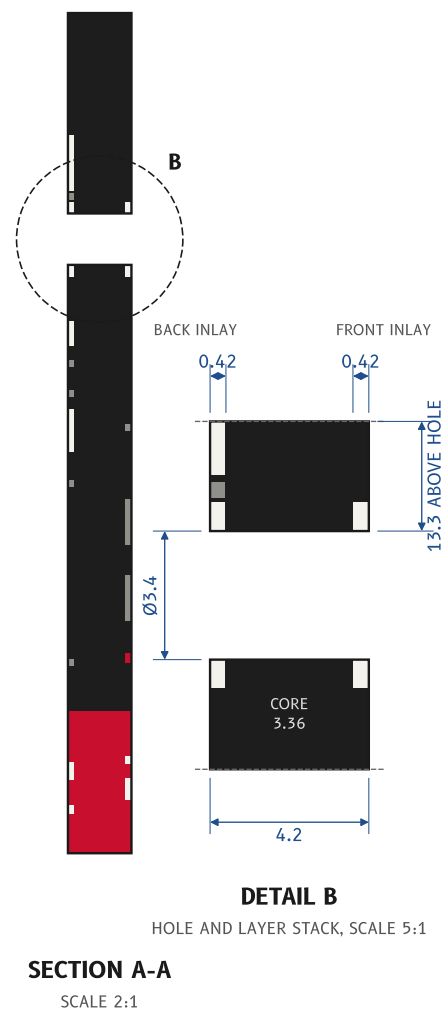
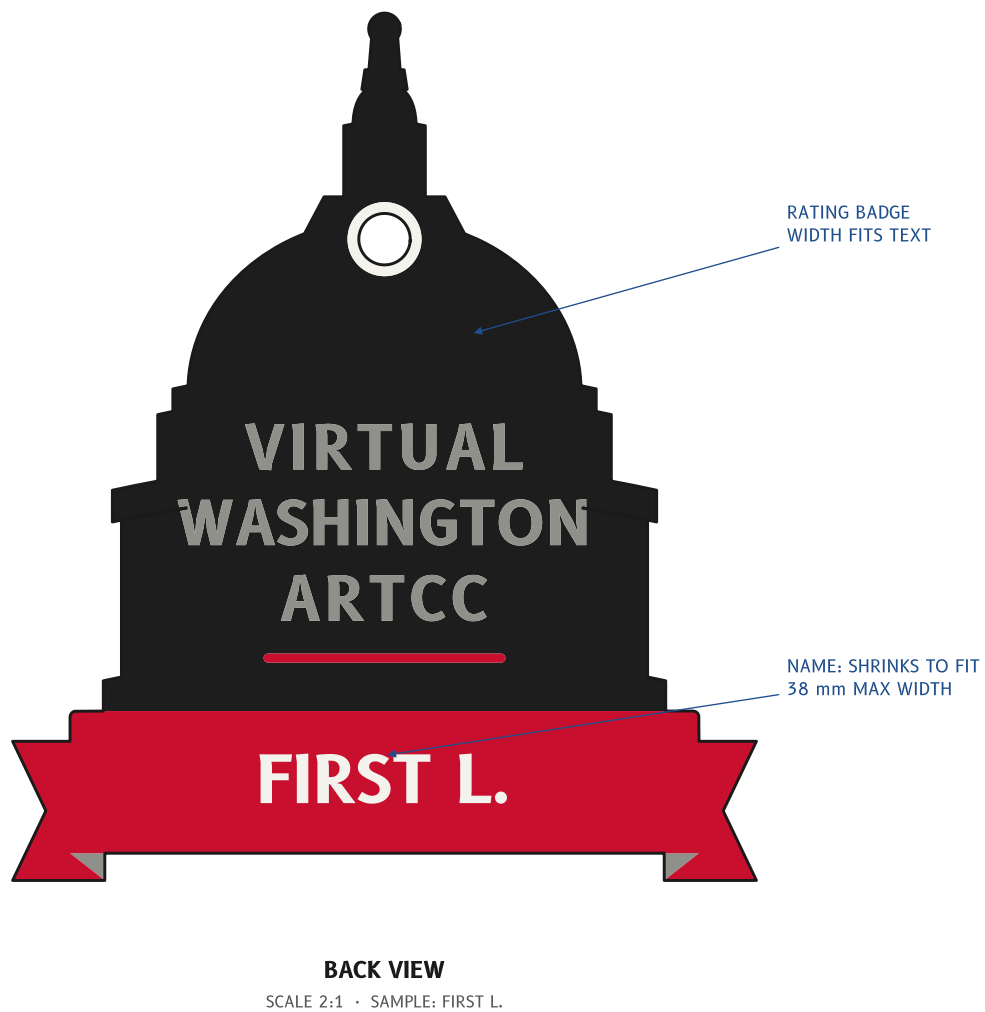


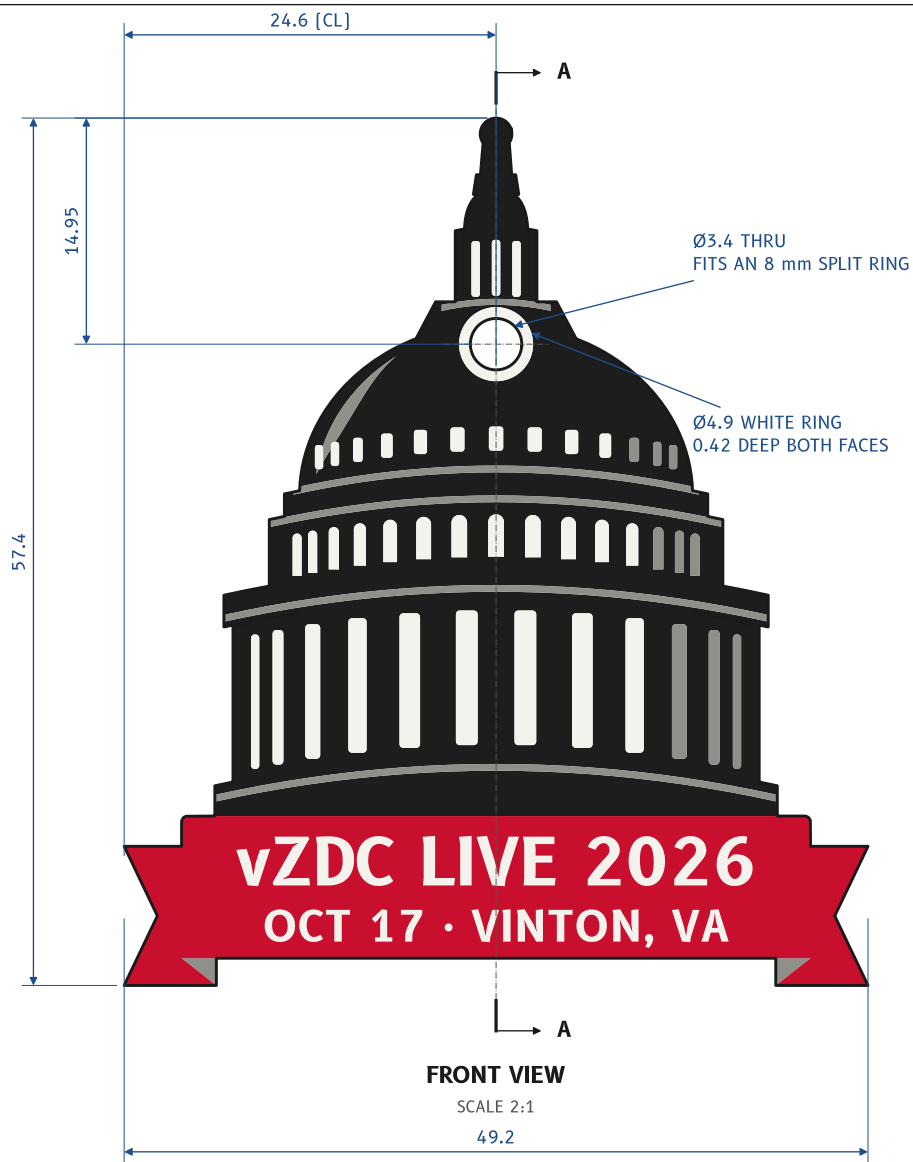

3D REFERENCE

Rendered from the print files.
Not to scale. Split ring shown
for reference, not printed.

NOTES

1. Material: PLA [Bambu PLA Basic], 4 colors via AMS. Bambu Lab P2S, 0.2 mm nozzle.
2. Print BACK face down [fewer small islands on layer 1]. Layer height 0.14 mm. Iron the top [front].
3. Color inlays are flush, 0.42 mm [3 layers] deep on each face. Core 3.36 mm.
4. Ribbon is red through its full thickness. All other core material is black.
5. Minimum feature 0.55 mm. Minimum text cap height 1.9 mm [thinnest stroke 0.6 mm].
6. Back ribbon is one free text field per attendee; rating and CID optional. See attendees.csv.
7. Dimensions in mm. General tolerance ± 0.2 unless noted.
8. Layer 1 carries small colour islands: no island is narrower than 0.3 mm, elephant-foot compensation is 0 (if shaved 0.15 mm off every one), one wall on layer 1, brim 4 mm, 25 mm/s.

SLOT	FILAMENT	WHERE	VOLUME	MASS
1	BLACK	Body, columns, dome	4039 mm ³	5.01 g
2	WHITE	Windows, hole ring, text	104 mm ³	0.13 g
3	GRAY	Lines, shading, ARTCC text	77 mm ³	0.10 g
4	RED	Ribbon [full depth], badge	1848 mm ³	2.29 g

Masses are the part only. Purge adds about 14 g per plate of 10-11, about 1.4 g each.

vZDC LIVE 2026 KEYCHAIN	
Night Ribbon · Virtual Washington ARTCC · Oct 17 · Vinton, VA	
SAMPLE: FIRST L. · · · TOP: DOME	
PART NO. ZDC-KC-2026-01	SCALE 2:1 · DETAIL 5:1
UNITS / TOL. mm · ± 0.2	DATE · SHEET 2026-10-06 · 1/1